

ACCEPTANCE CRITERIA FOR INSPECTION:

- 1. INSPECT FOR LOOSE DEBRIS OR PARTICLES.
- 2. INSPECT FOR UNIFORM SURFACE CONDITION.
- 3. INSPECT FOR COLOR, DISCOLORATION, HOLES OR TEARS.



3.0 FABRICATE USING 3D SOLID MODEL FILE PER REVISION BLOCK. ALL DIMENSIONS AND FEATURES NOT SPECIFIED ON PRINT ARE TO BE DERIVED FROM 3D MODEL FILE. INSPECT PART PER PART PRINT.

2.0 MATERIAL COLOR: CLEAR

1.0 MATERIAL TYPE: SILICONE

NOTES: UNLESS OTHERWISE NOTED

REVISIONS			
REV	ECO NUMBER	RELEASE DATE	DESCRIPTION OF CHANGE
0	040	06/20/2023	INITIAL RELEASE
1	055	07/18/2023	UPDATED VIEWS TO SHOW FLAT O-RING
2	063		UPDATED OVERALL HEIGHT

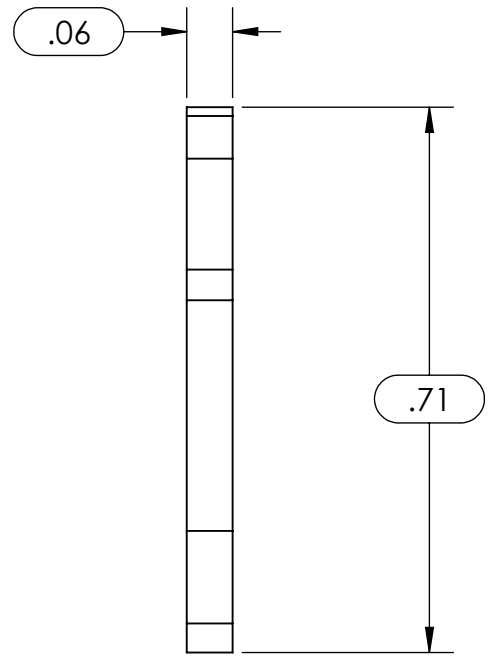

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:

ONE PLACE DECIMAL ±.100
TWO PLACE DECIMAL ±.010
THREE PLACE DECIMAL ±.005

THIRD ANGLE
PERSPECTIVE:

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF STARLING MEDICAL. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF NEOTECH PRODUCTS IS
PROHIBITED.

DRAWN BY	D. SALDANA	DATE	02/07/2023
APPROVED BY	D. HENDRICKS	DATE	06/15/2023
SEE ECO RECORDS FOR ALL APPROVALS			
APPLICABLE STANDARDS: INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009.			
COMMENTS:			

TITLE:

MOLDED, URINDX, O-RING,
CUVETTE FRONT

SIZE	DWG. NO.	REV
B	DW-01018	2

SCALE:

SHEET 1 OF 1

Starling