


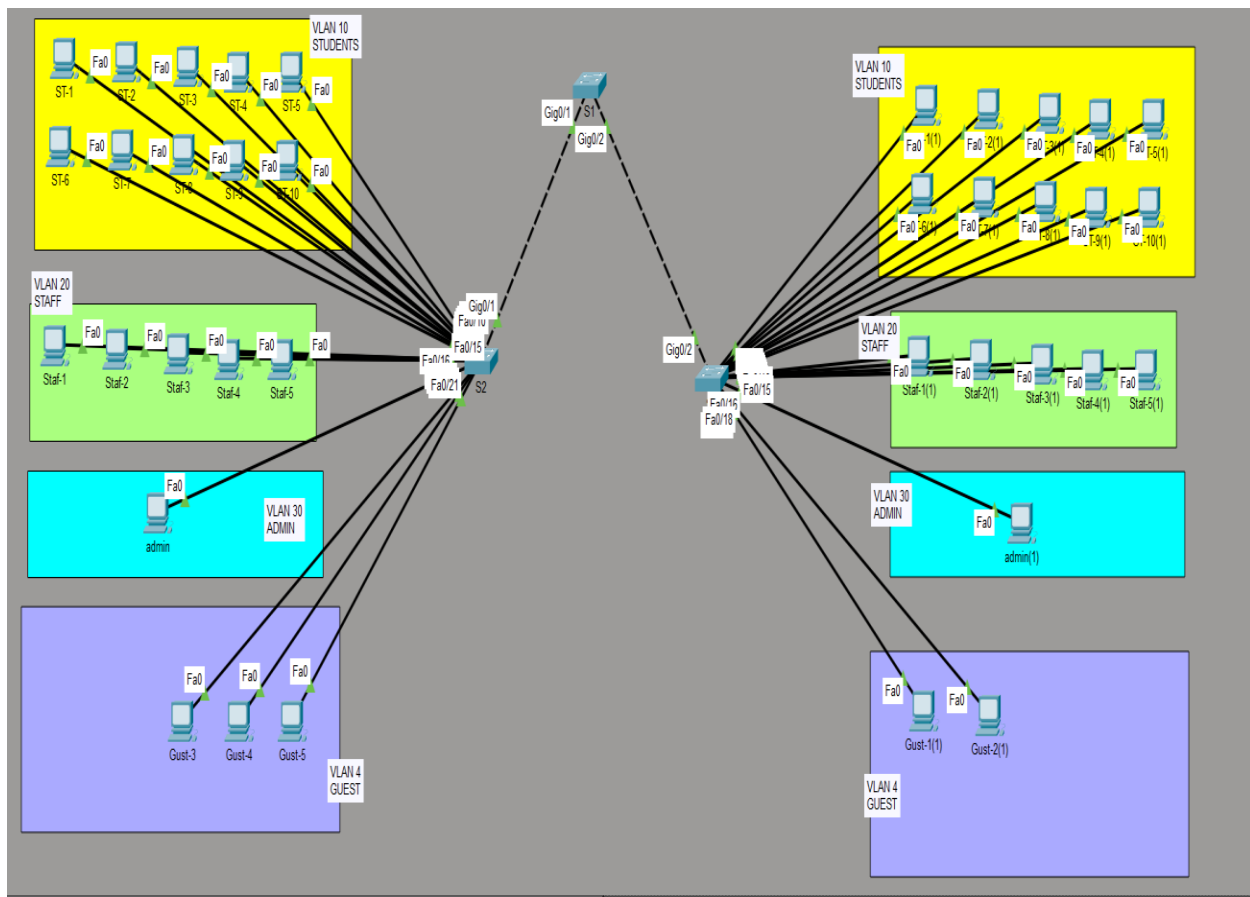

CCNA2- LAB Activity 2

IPv4 addressing ~~FLSM~~

~~VLAN 40~~

Vlan	Hosts	N-Adp	Prefix	Sub-M	F-usable	L-usable	Broadcast
VLAN 10	20	192.168.10.0	/26	255.255.255.192	192.168.10.1	192.168.10.62	192.168.10.63
VLAN 20	10	192.168.10.64	/26	255.255.255.192	192.168.10.65	192.168.10.126	192.168.10.127
VLAN 30	2	192.168.10.128	/26	255.255.255.192	192.168.10.129	192.168.10.190	192.168.10.191
VLAN 40	5	192.168.10.192	/26	255.255.255.192	192.168.10.193	192.168.10.254	192.168.10.255

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	STUDENTS	active	
20	STAFF	active	
30	ADMIN	active	
40	GUESTS	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	
51#			

```
S2(config-line)#
S2(config-line)#do sh vlan b
```

VLAN	Name	Status	Ports
1	default	active	Fa0/17, Fa0/18, Fa0/22, Fa0/23 Fa0/24, Gig0/2
10	STUDENTS	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10
20	STAFF	active	Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15
30	ADMIN	active	Fa0/16
40	GUESTS	active	Fa0/19, Fa0/20, Fa0/21
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S2(config-line)#
```

```
S3(config-line)#do sh vlan b
```

VLAN	Name	Status	Ports
1	default	active	Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1
10	STUDENTS	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10
20	STAFF	active	Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15
30	ADMIN	active	Fa0/16
40	GUESTS	active	Fa0/17, Fa0/18
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S3(config-line)#
```

```
S1#
S1#sh int tr
Port      Mode      Encapsulation  Status      Native vlan
Gig0/1    on        802.1q         trunking    99
Gig0/2    on        802.1q         trunking    99

Port      Vlans allowed on trunk
Gig0/1    10,20,30,40,99
Gig0/2    10,20,30,40,99

Port      Vlans allowed and active in management domain
Gig0/1    10,20,30,40
Gig0/2    10,20,30,40

Port      Vlans in spanning tree forwarding state and not pruned
Gig0/1    10,20,30,40
Gig0/2    10,20,30,40

S1#|
```

Top