


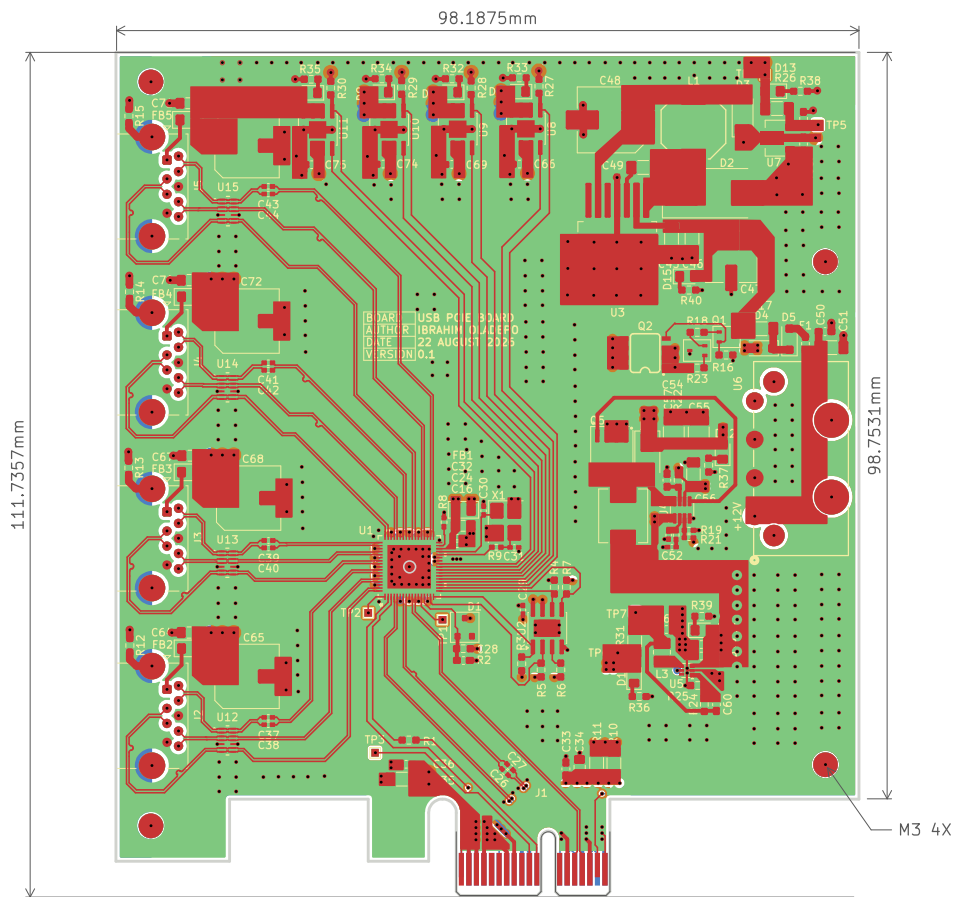

REMARKS

- Total Board Thickness: 1.6062mm
- Finish: ENIG
- Impedance Controlled: Yes
- Plated Edges: Yes
- Edge Connector: Yes
- Minimum Trace Width/Space: 0.2mm/0.2mm
- Minimum Via Size: Hole Diameter 0.2mm / Round Diameter 0.35 mm
- Impedance Control:
 - USB: 90Ω-Differential, Trace Width 0.2187mm (8.61mil) / Spacing 0.127mm (5.0mil)
 - PCIE: 90Ω-Differential, Trace Width 0.2187mm (8.61mil) / Spacing 0.127mm (5.0mil)
- Copper Plating Thickness: Outer 1oz / Inner 0.5oz
- Tented Vias: Yes

LAYER STACKUP [4 LAYERS]

LAYER	TYPE	THICKNESS	MATERIAL	Er	LOSS TANGENT
F.Silkscreen	Top Silk Screen	—	Not specified	—	—
F.Paste	Top Solder Paste	—	—	—	—
F.Mask	Top Solder Mask	0.01 mm	Not specified	3.3	0
F.Cu	copper	0.035 mm	—	—	—
Dielectric 1 (prepreg)	prepreg	0.2104 mm	FR4	4.4	0.02
In1.Cu	copper	0.0152 mm	—	—	—
Dielectric 2 (core)	core	1.065 mm	FR4	4.6	0.02
In2.Cu	copper	0.0152 mm	—	—	—
Dielectric 3 (prepreg)	prepreg	0.2104 mm	FR4	4.4	0.02
B.Cu	copper	0.035 mm	—	—	—
B.Mask	Bottom Solder Mask	0.01 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste	—	—	—	—
B.Silkscreen	Bottom Silk Screen	—	Not specified	—	—

COMPONENT TYPES

COMPONENT TYPE	FRONT SIDE	BACK SIDE	TOTAL
THT	5	0	5
SMD	135	23	158
Total	140	23	163

DRILL TABLE

COUNT	SHAPE	X SIZE	Y SIZE	PLATED	VIA/PAD
485	Round	0.2000 mm	0.2000 mm	PTH	Via
91	Round	0.4000 mm	0.4000 mm	PTH	Via
36	Round	0.7000 mm	0.7000 mm	PTH	Pad
8	Round	2.3000 mm	2.3000 mm	PTH	Pad
7	Round	0.5000 mm	0.5000 mm	PTH	Pad
4	Round	1.5240 mm	1.5240 mm	PTH	Pad
4	Round	3.2000 mm	3.2000 mm	NPTH	Pad
4	Round	0.3000 mm	0.3000 mm	PTH	Via
2	Round	2.5400 mm	2.5400 mm	PTH	Pad
2	Round	4.0640 mm	4.0640 mm	PTH	Pad
1	Round	1.5000 mm	1.5000 mm	PTH	Pad

Sheet:
File: USB_PCIE_Board.kicad_pcb

Title: USB PCIE Expansion Card Board

Size: A4 Date: 2026-08-14

KiCad E.D.A. 10.0.3

Rev: 0.1

Id: 1/1