




Subimos la tensión de 3.3 V a 5 V (RFID reader -> Arduino)

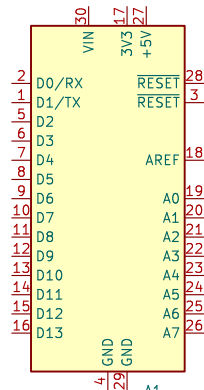


Adaptamos la tensión de 5 V a -3.3 V (Arduino -> RFID reader)



A1
Arduino_Nano_v3.x

Definir si se usa SPI o serial por soft. Seguramente si es spi se necesitan 3/4 conversores, si es serial solo 1 activo 1 pasivo. si es I2C idem serial

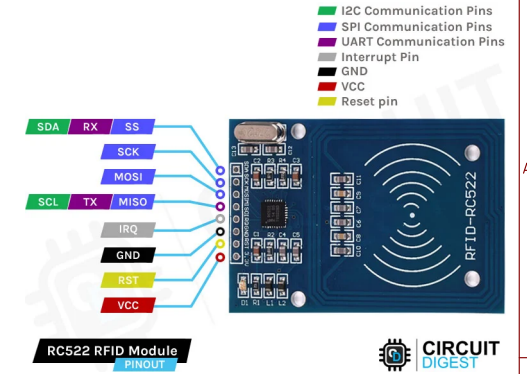

Pin	Function / Description
SDA, SCL	I ² C communication pins for Data (SDA) and Clock (SCL).
SS, SCK, MOSI, MISO	SPI communication pins: Slave Select (SS), Clock (SCK), Master Out Slave In (MOSI), and Master In Slave Out (MISO).
RX, TX	UART communication pins for serial data transfer.
IRQ	Interrupt signal from the module to indicate RFID tag detection.
GND	Ground pin; must be connected to Arduino GND.
RST	Reset pin for the module.
VCC	Supply pin for the module (2.5V-3.3V), must be connected to Arduino 3.3V.

Esto es SPI seguro, al parecer es hard-wired

<https://circuitdigest.com/microcontroller-projects/interfacing-rfid-reader-module-with-arduino>

Sheet: /
File: card_reader.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.3

Date:

Rev:

Id: 1/1