```
################################################################################
### Collection finished at 10_09_2026 12:46:37 by iceinmilk
### Collection process took 134.03s.
################################################################################
Target Parameters:
  * Target Board: stm32f3
  * Target Implementation: TINYAES128C
  * Target Platform: CW308_STM32F3
  * Simpleserial Version: SS_VER_1_1
  * Target programmer:
  * Target bitstream file: /home/iceinmilk/Documents/chipwhisperer/chipwhisperer/firmware/
mcu/simpleserial-aes/simpleserial-aes-CW308_STM32F3.hex
Scope Parameters:
  * Scope offset: 0
  * Scope samples per trace: 5000
  * Scope mode: high -> Scope basic_mode: rising_edge
  * Scope Gain Level: 30 -> Gain Db: 24.8359375
  * Scope trig_count: 26988
  * Scope clkgen_div: 26
  * Scope clkgen_freq: 7384615.384615385 -> 7.385 MHz
  * Scope adc_src: clkgen_x4
  * Scope adc_freq: 29538459 -> 29.538 MHz
  * Scope adc_rate: 29538459.0
Trace Collection Parameters:
  * Fixed key used? : True
  * Tests Passed?: True
  * Utilized Key: 2B 7E 15 16 28 AE D2 A6 AB F7 15 88 09 CF 4F 3C
  * Number of traces collected: 5000
Dataset Parameters:
  * Saved dataset name: STM32_K2_5k_TinyAES_20260802-001
  * Saved dataset path: /home/iceinmilk/Documents/chipwhispererSTM32_K2_5k_TinyAES_
20260802-001/STM32_K2_5k_TinyAES_20260802-001.npz
  * Saved dataset size: 190.812 MBs
  * Saved dataset hash (SHA256):
7e1b50cf2338294df642bef61f7a04f43dccfc5189dd340333824b5b81afcb90
```
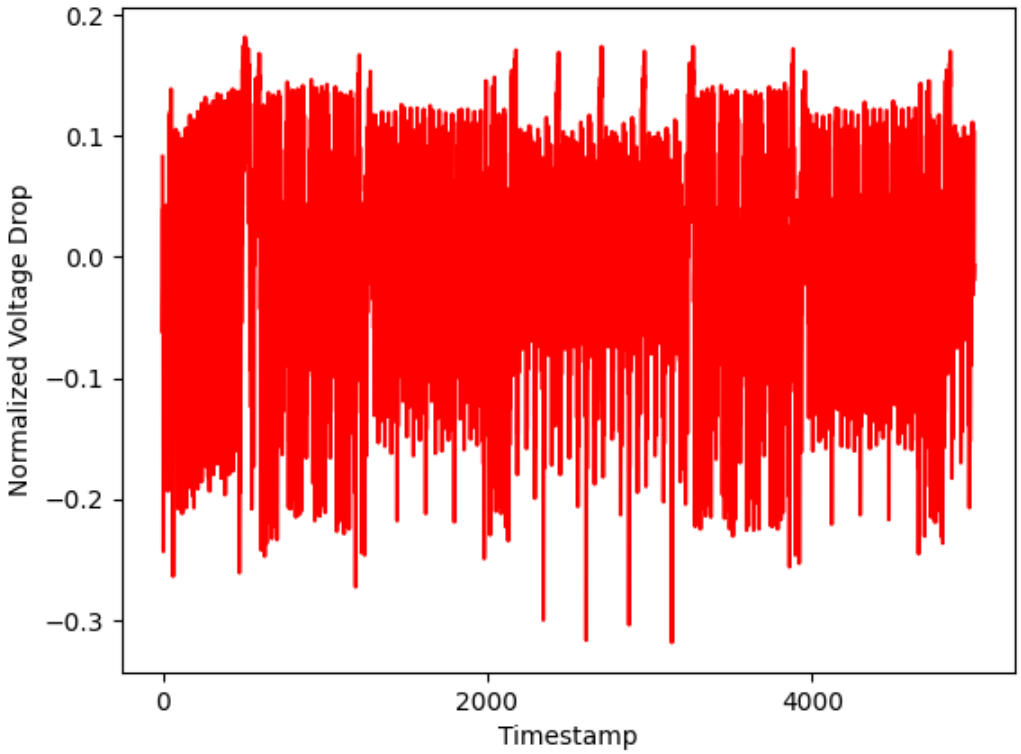
Example Trace from STM32_K2_5k_TinyAES_20260802-001 dataset: