


SMA Female Solderless PCB Connector with 2 Hole Flange for CPW/Microstrip, DC -26.5GHz **SMA-KFD216-4**



Dimensions are in mm

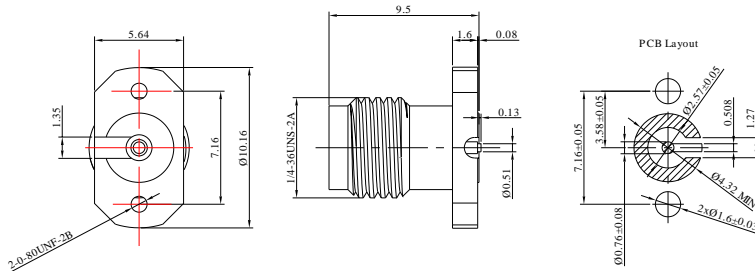

## Product Configuration

Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Body Style	Straight
Termination Type	PCB
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

## Mechanical Data

Mating Cycles, Min	≥500
Body Material	Stainless Steel
Body Plating	Passivated

## Electrical Specifications

Frequency	DC-26.5GHz
VSWR	1.2
Insertion Loss	≤0.05 xSq.(f GHz)

## Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A