



1. Identification / recognition

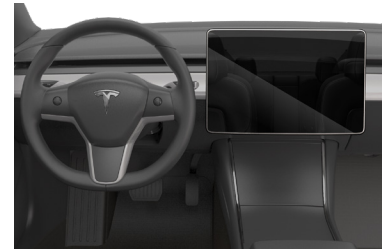

WARNING LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE).

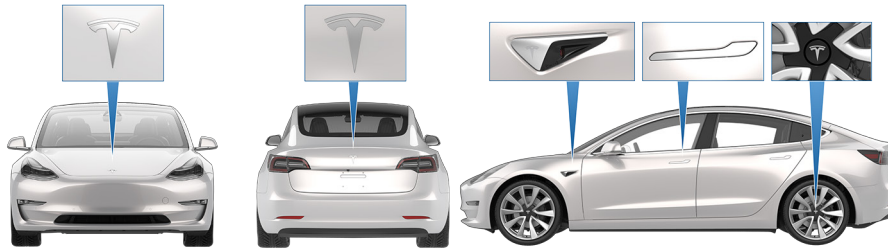

NOTE: The Tesla emblem indicates a fully electric vehicle.

NOTE: The model name does not appear on the exterior of the vehicle.

2. Immobilization / stabilization / lifting

IMMOBILIZATION

1. CHOCK WHEELS




2. PUT VEHICLE INTO **P**ARK POSITION



PUSH 1x

STABILIZATION/ LIFTING POINTS

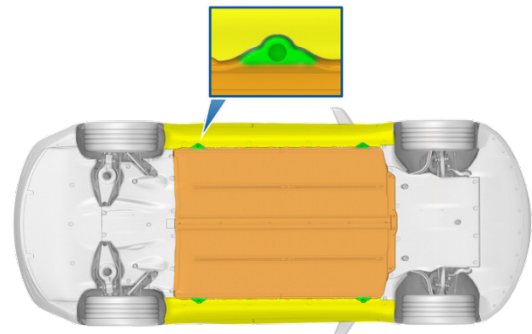


| | |
|--|---|
| | Appropriate lift areas |
| | Safe stabilization points for Model 3 resting on its side |
| | High Voltage (HV) Battery |

3. Disable direct hazards / safety regulations


ACCESS

1. Open the hood (see chapter 4).
2. Remove the access panel by pulling it upward to release the clips that hold it in place.

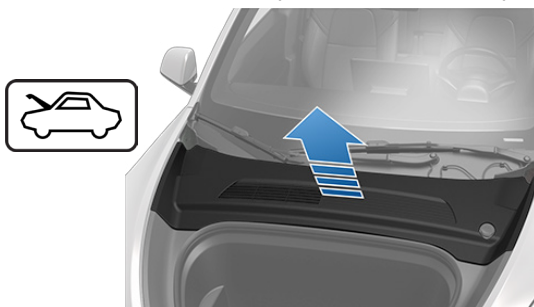

MAIN DISABLE METHOD

1. Double cut the first responder loop.
2. Disable the 12V battery.

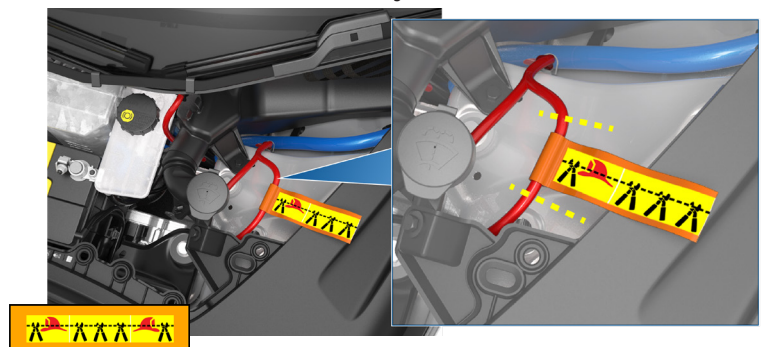

WARNING Not every high voltage component is labeled. Always wear appropriate PPE. Always double cut the first responder loop. Do not attempt to open the High Voltage (HV) battery.

