

Date	Version	Description
2018/03/12	1.0	Initial Release
2018/04/13	1.1	1. R45 use 90.9K ohm 2. R77 use 330K ohm
2018/05/07	1.2	1. Add TVS diode on USB5V 2. Add clamp diode on USB5V
2018/05/22	1.3	Add Y1,L10,R101,R102 description
2018/07/20	1.4	1. Add R65 pull-up resistor 2. C23 NC
2018/08/02	1.5	1. Replace Q5(APM2301) with (APM4435) 2. R45 use 100K ohm
2019/01/07	1.6	1. Reserved reset IC U15, U16, C24 and C26 for USB LOGO
2019/01/15	1.7	1. Remove U15, U16, C24 and C26 2. Add GPIO7 to enable D3V3 power(R47) 3. R46 used 750K ohm and C23 mount 1uF 4. C2, C18, C25 NM
2019/04/11	1.8	1. Change C15,CB27 value from 1uF to 4.7uF 2. Change C11,C12 value from 20pF to 10pF 3. For 3V3 issue , remove R47 , connect D3V3 to JMS583 4. For Inrush current issue , add R58 , change R56 to NM 5. For by pass Cap issue , add C24+CB35+R66+Q6+R48



PCB File Name
JMS583 QFN64-8X8-BUS POWER















Title
Release Note

Size B	Document Number	Rev
-----------	-----------------	-----

Date: Thursday, April 11, 2019 Sheet 1 of 3


D3V3 VCCO AVDDH
D1V0 VCCCK U AVDDL P AVDDL C AVDDL

Internal regulator

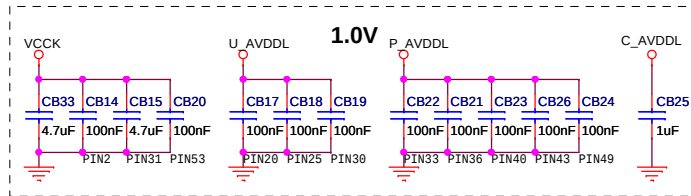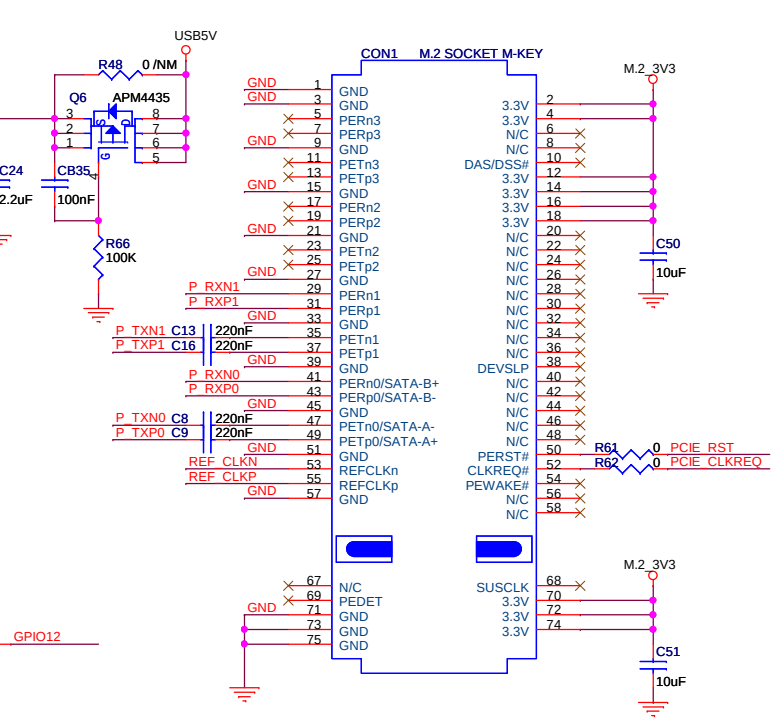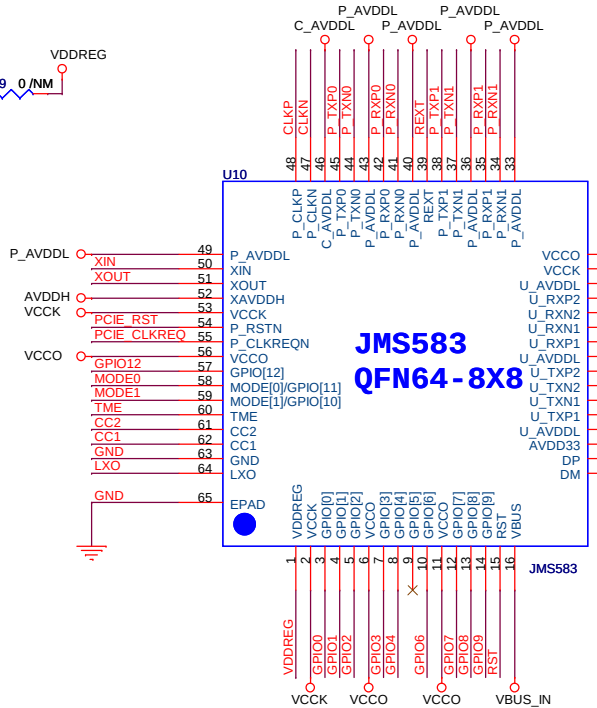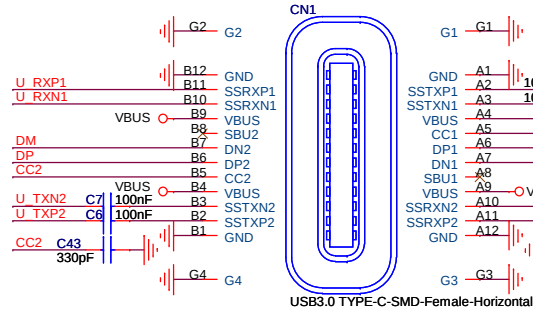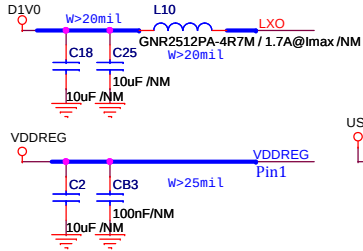


JMicron Technology Corp.		
PCB File Name		
JMS583 QFN64-8X8-BUS POWER		
Title		
JMS583_Main Chip		
Size B	Document Number	Rev
Date: Thursday, April 11, 2019	Sheet 2 of 3	


SSD Power CTRL

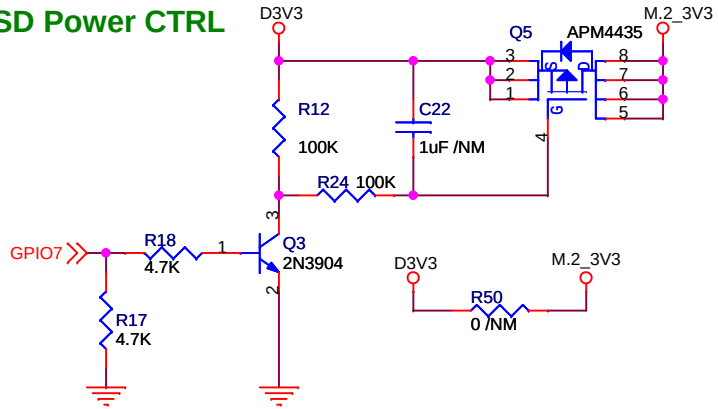

5V to 1.0V@1.2A

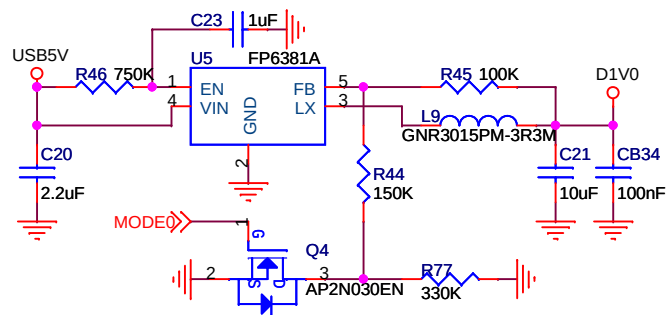

5V to 3V3 Regulator

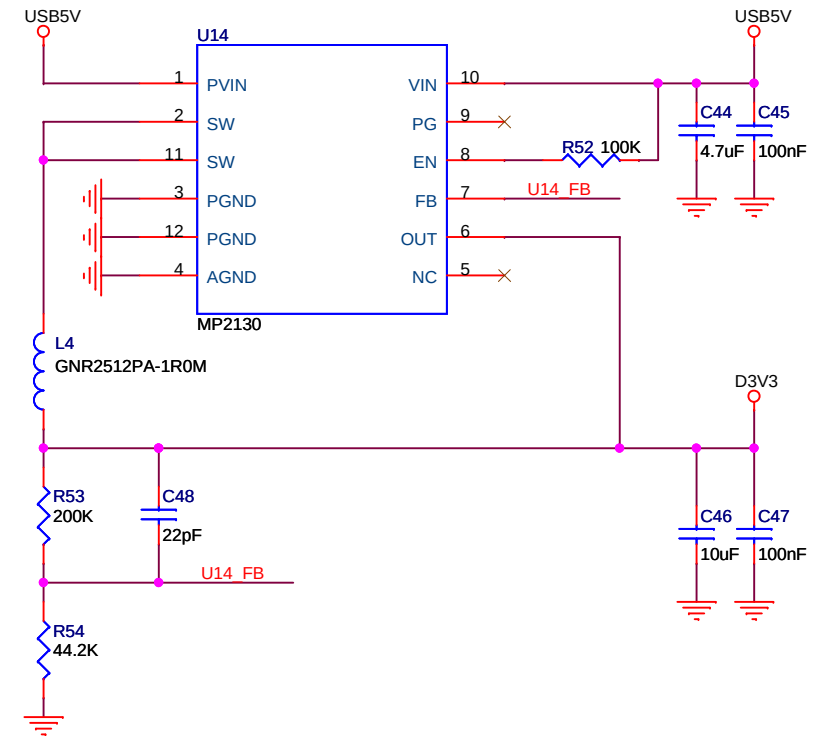

$$D3V3 = 0.6 * (1 + R53/R54) = 0.6 * (1 + 200K/44.2K) = 3.3V$$



JMicron Technology Corp.

PCB File Name

JMS583 QFN64-8X8-BUS POWER

Title

JMS583_Main Chip

Size

Document Number

Rev

Date: Thursday, April 11, 2019

Sheet 3 of 3