


(a) original Arm26

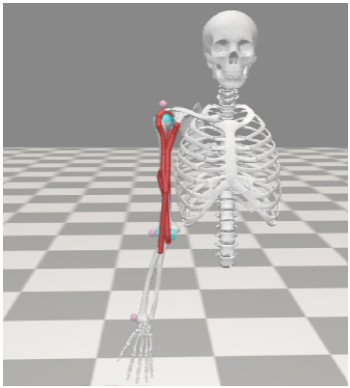

(b) 2 kg load, 11 candidate paths

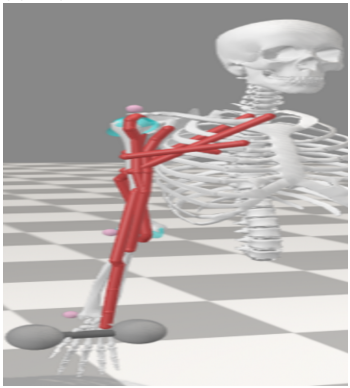

(c) retained four flexors

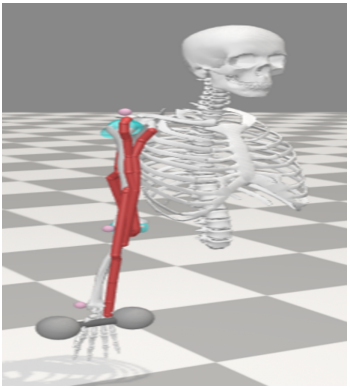

(d) static-optimisation screening of the eleven paths

