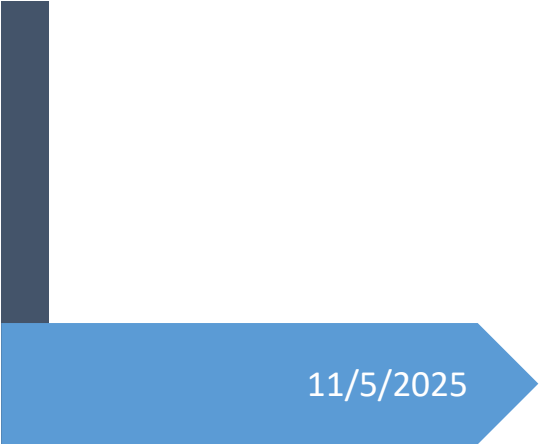
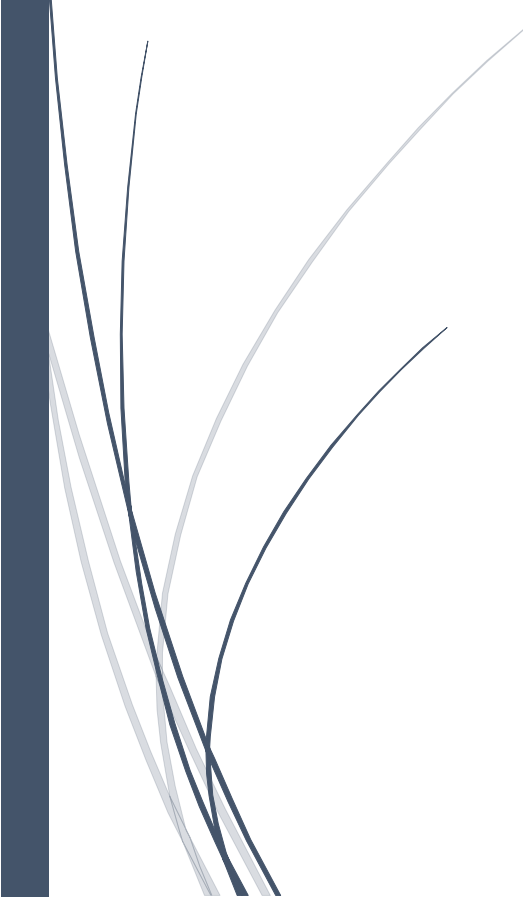


A dark blue vertical bar is on the left. A blue arrow points right from it, containing the date.

11/5/2025

Computer Network


Lab 12

Several thin, curved lines in dark blue and light grey originate from the bottom left and curve upwards and to the right.

IFZA RIZWAN
SAP 64281


LAB 12 TASKS:

STEP 1:

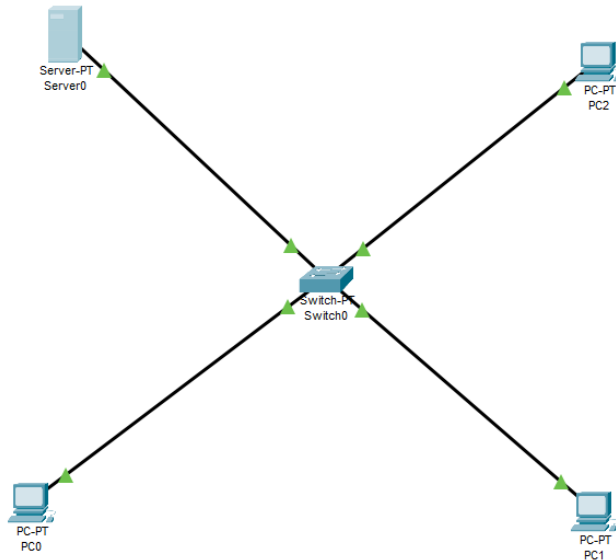

STEP 2:

GIVE IP ADDRESS AND SUBNET MASKS TO PCS AND SWERVER:

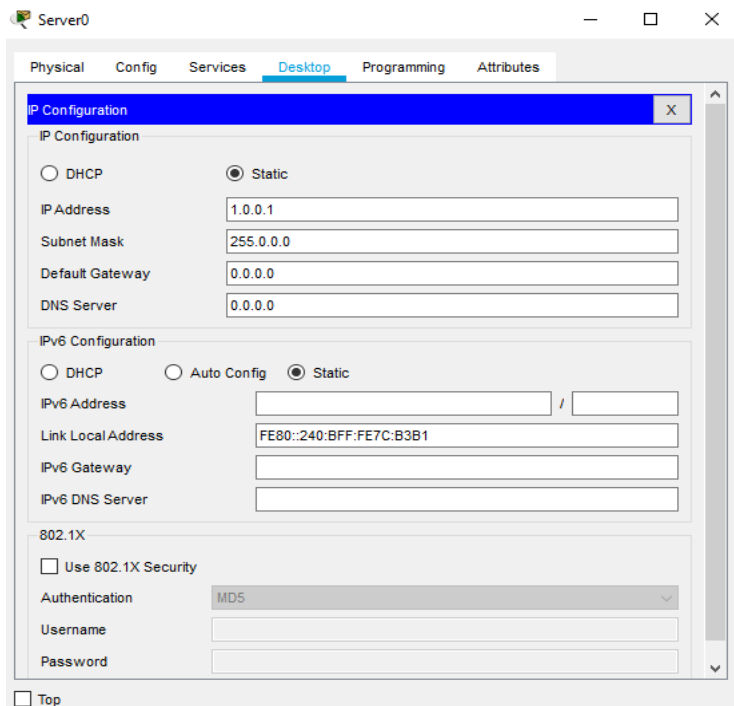

PC0

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IP Address 1.0.0.2

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address /

Link Local Address FE80::250:FFF:FE28:417A

IPv6 Gateway

IPv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Top

PC1

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IP Address 1.0.0.3

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address /

Link Local Address FE80::260:47FF:FE3A:EAC

IPv6 Gateway

IPv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Top

PC2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IP Address 1.0.0.4

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address /

Link Local Address FE80::20C:85FF:FE0D:441E

IPv6 Gateway

IPv6 DNS Server

802.1X

☐ Use 802.1X Security


Authentication MD5

Username

Top

STEP 3:

SET THE FIRE WALL OF SERVER:

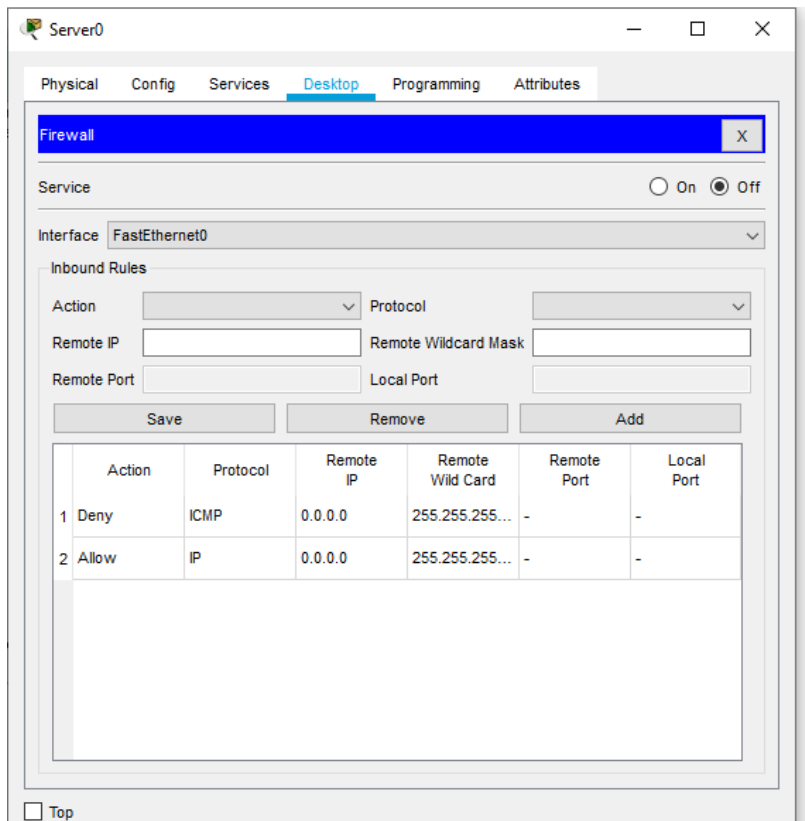

STEP 4:

Now ping the server from pc 2

```
C:\>ping 1.0.0.1


Pinging 1.0.0.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 1.0.0.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

Step 5:

Now go to web browser and link the server ip or browse.

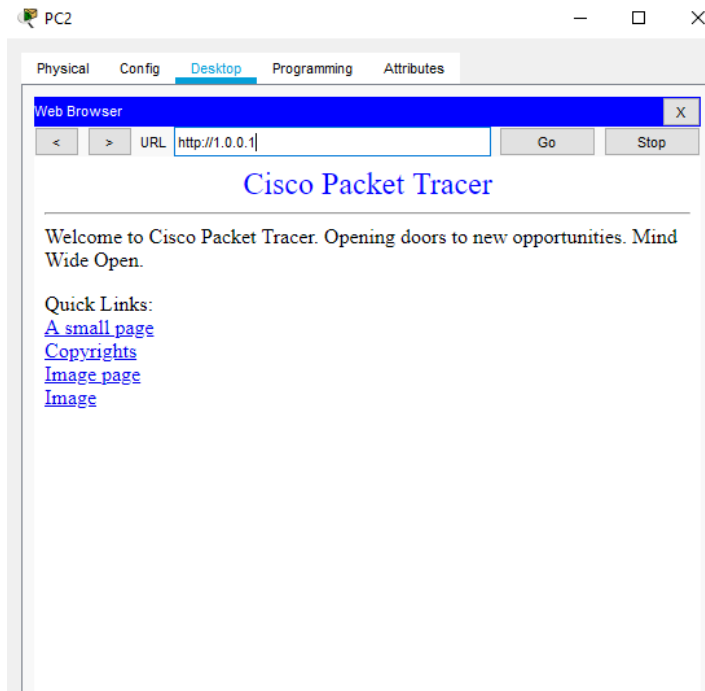

THE END