



# only to proposition

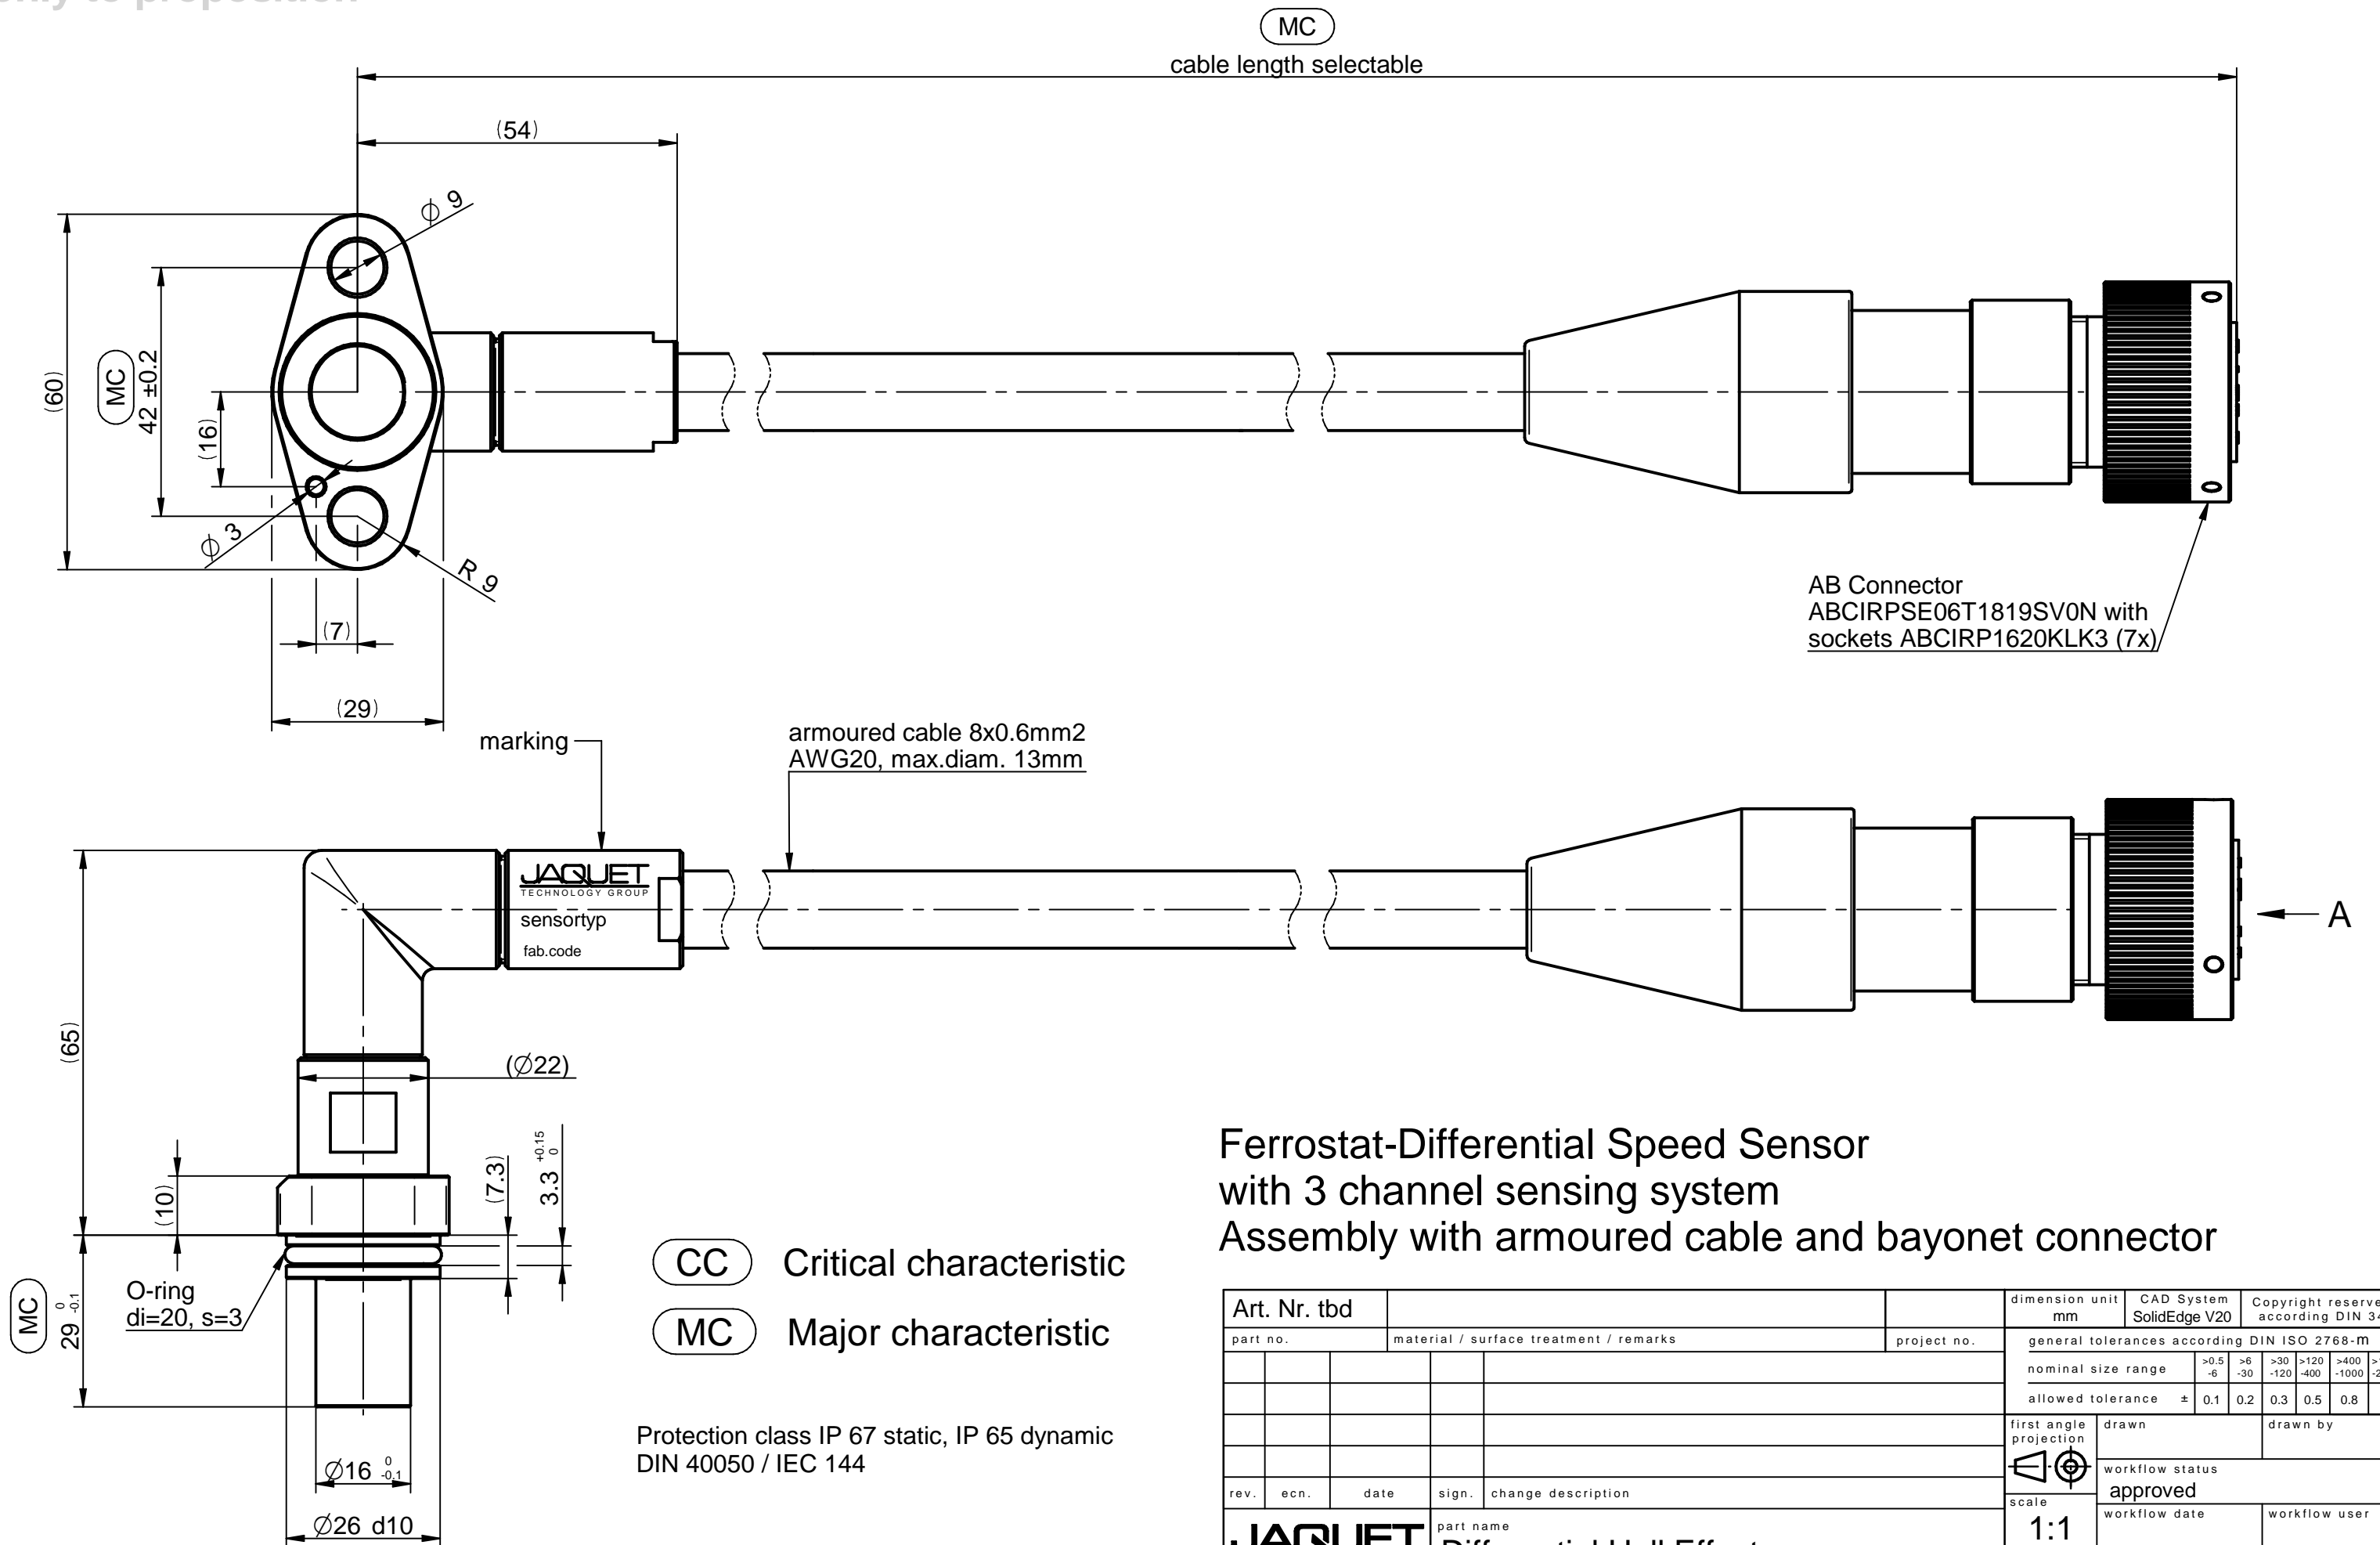

Ferroat-Differential Speed Sensor  
with 3 channel sensing system  
Assembly with armoured cable and bayonet connector

Art. Nr. tbd										dimension unit mm		CAD System SolidEdge V20		Copyright reserved according DIN 34										
part no.			material / surface treatment / remarks							project no.		general tolerances according DIN ISO 2768-m												
											nominal size range		>0.5 -6	>6 -30	>30 -120	>120 -400	>400 -1000	>1000 -2000						
											allowed tolerance		±	0.1	0.2	0.3	0.5	0.8	1.2					
											<div>first angle projection</div> <div></div>	drawn			drawn by									
										workflow status approved														
										workflow date			workflow user											
rev.		ecn.		date		sign.		change description												scale  1:1				
<div>JAQUET</div> <div>TECHNOLOGY GROUP</div> <div>Thannerstrasse 15 CH - 4009 Basel www.jaquet.com</div>					<div>part name</div> <div>Differential Hall Effect Speed Sensor DSD 1820.21 P tbd HWR</div>															drawing type Massbild				
												format  A3		drawing no.  tbd					rev.  000					