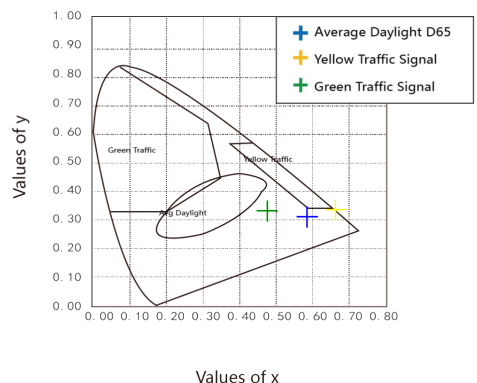


# Lens Certification Report

Customer :  
 Lens Name :  
 Lens Type :

Remark :

| Standard:ISO 12312-1:2022    |                  |          |        | Standard: AS/NZS 1067.1:2016+A1-2021 |                   |          |        |
|------------------------------|------------------|----------|--------|--------------------------------------|-------------------|----------|--------|
| Item                         | Requirement      | Value    | Result | Item                                 | Requirement       | Value    | Result |
| Filter Category              |                  | <b>3</b> |        | Filter Category                      |                   | <b>3</b> |        |
| Luminous Transmittance Tv    | 8% - 18%         | 9.53 %   | PASS   | Luminous Transmittance               | 8% - 18%          | 9.53 %   | PASS   |
| Incandescent Lights          |                  |          |        | Incandescent Lights                  |                   |          |        |
| Q.Red                        | >=0.80           | 3.85     | PASS   | Q.Red                                | >=0.80            | 3.85     | PASS   |
| Q.Yellow                     | >=0.60           | 1.91     | PASS   | Q.Yellow                             | >=0.60            | 1.91     | PASS   |
| Q.Green                      | >=0.60           | 0.31     | FAILED | Q.Green                              | >=0.60            | 0.31     | FAILED |
| Q.Blue                       | >=0.60           | 0.41     | FAILED | Q.Blue                               | >=0.70            | 0.41     | FAILED |
| Tmin (475-650 nm)            | >=1.91 % (0.2Tv) | 0.21 %   | PASS   | Tmin (475-650 nm)                    | >=1.91 % (0.2Tv)  | 0.21 %   | PASS   |
| Tsuva (315-380 nm)           | <=4.76 % (0.5Tv) | 0.00 %   | PASS   | Tsuva (315-400 nm)                   | <=4.76 % (0.5Tv)  | 0.00 %   | PASS   |
| Tsub (280-315 nm)            | <=1.00 %         | 0.00 %   | PASS   | Tsub (280-315 nm)                    | <=0.48 % (0.05Tv) | 0.00 %   | PASS   |
| Tsuv (280-380 nm)            |                  | 0.00 %   |        | Tsuv (280-400 nm)                    |                   | 0.00 %   |        |
| Tsb (380-500 nm)             |                  | 3.09 %   |        | Tsb (400-500 nm)                     |                   | 3.09 %   |        |
| Road Use And Driving         |                  |          | FAILED |                                      |                   |          |        |
| Driving In Twilight or Night | Tv>=75 %         | 9.53 %   | NOT    |                                      |                   |          |        |

| Standard: ANSI Z80.3:2018     |                    |                        |        | Color Limit Regions of Acceptance                                                    |  |  |  |
|-------------------------------|--------------------|------------------------|--------|--------------------------------------------------------------------------------------|--|--|--|
| Item                          | Requirement        | Value                  | Result |                                                                                      |  |  |  |
| Lens Primary Function         |                    | <b>General Purpose</b> |        |  |  |  |  |
| Luminous Transmittance Tv     | 8% - 40%           | 9.70 %                 | PASS   |                                                                                      |  |  |  |
| Colour Distortion             |                    |                        |        |                                                                                      |  |  |  |
| Yellow (X,Y)                  |                    | (0.6620,0.3377)        | FAILED |                                                                                      |  |  |  |
| Green (X,Y)                   |                    | (0.4764,0.3338)        | FAILED |                                                                                      |  |  |  |
| D65 (X,Y)                     |                    | (0.5851,0.3136)        | FAILED |                                                                                      |  |  |  |
| Traffic Signals Transmittance |                    |                        |        |                                                                                      |  |  |  |
| Tsig, Red Signal              | >=8.00 %           | 41.11 %                | PASS   |                                                                                      |  |  |  |
| Tsig, Yellow Signal           | >=6.00 %           | 19.64 %                | PASS   |                                                                                      |  |  |  |
| Tsig, Green Signal            | >=6.00 %           | 2.71 %                 | PASS   |                                                                                      |  |  |  |
| Tmin (475-650 nm)             | >=1.94 % (0.2Tv)   | 0.21 %                 | PASS   |                                                                                      |  |  |  |
| Tmax UVB (280-315 nm)         | <=1.21 % (0.125Tv) | 0.00 %                 | PASS   |                                                                                      |  |  |  |
| Tmax UVA (315-380 nm)         | <=9.70 % (Tv)      | 0.00 %                 | PASS   |                                                                                      |  |  |  |
| Tsb (380-500 nm)              |                    | 3.09 %                 |        |                                                                                      |  |  |  |

## Measurement Results:

| ISO 12312-1:2022 |      | ANSI Z80.3-2018 |      | AS/NZS 1067.1:2016+A1-2021 |      | Illuminant D65 |           |
|------------------|------|-----------------|------|----------------------------|------|----------------|-----------|
| Result           | FAIL | Result          | FAIL | Result                     | FAIL | x 0.59         | L * 36.23 |
|                  |      |                 |      |                            |      | y 0.31         | a * 55.59 |
|                  |      |                 |      |                            |      | z 0.10         | b * 27.77 |

