


Sample Description: UV-8008 AR B/G

European Standard [EN/ISO 12312-1-2015]				AS/NZS Standard [AS/NZS 1067-2016]			
Item	Value	Requement	Results	Item	Value	Requement	Results
Transmittance(Tv)	49.93%			Transmittance(Tv)	49.93%		
Filter Category	1			Filter Category	1		
Tsubv (280nm~315nm)	0.00%	<2.50%(0.05Tv)	PASS	Tsubv (280nm~315nm)	0.00%	<2.50%(0.05Tv)	PASS
Tsuva (315nm~380nm)	0.00%	<49.93%Tv	PASS	Tsuva (315nm~380nm)	0.00%	<49.93%Tv	PASS
Tmin (475nm~650nm)	0.09%	>=9.99%(0.2Tv)	REF.	Tmin (475nm~650nm)	0.09%	>=9.99%(0.2Tv)	REF.
Claimed Value				Claimed Value			
Tsubv (280nm~315nm)	0.00%	<=(2.00+0.5)%	PASS	Tsubv (280nm~315nm)	0.00%	<=(2.00+0.5)%	PASS
Tsuva (315nm~380nm)	0.00%	<=(2.00+0.5)%	PASS	Tsuva (315nm~380nm)	0.00%	<=(2.00+0.5)%	PASS
Tsuv (280nm~380nm)	0.00%	<=(2.00+0.5)%	PASS	Tsuv (280nm~380nm)	0.01%	<=(2.00+0.5)%	PASS
Tsb (380nm~500nm)	0.21%	<=(90.00+0.5)%	PASS	Tsb (380nm~500nm)	0.21%	<=(90.00+0.5)%	PASS
Recognition of signal lights				Recognition of signal lights			
Red[Q] (INCT)	1.94	≥0.8	PASS	Red[Q] (INCT)	1.94	≥0.8	PASS
Yellow[Q] (INCT)	1.52	≥0.6	PASS	Yellow[Q] (INCT)	1.52	≥0.6	PASS
Green[Q] (INCT)	0.68	≥0.6	PASS	Green[Q] (INCT)	0.68	≥0.6	PASS
Blue[Q] (INCT)	0.22	≥0.6	REF.	Blue[Q] (INCT)	0.22	≥0.7	REF.

American National Standard [ANSI Z80.3-2015]

High and prolonged exposure NO

Item	Value	Requement	Results
Transmittance(Tc)	51.02%		
Filter Category	(Cosmetic lens or shield, light)		
Tsig Vaules			
Red	97.92%	≥8%	PASS
Yellow	82.71%	≥6%	PASS
Green	28.31%	≥6%	PASS
Mean Transmittance			
Tsb	0.21%		
UVB (280nm~315nm)	0.00%	<=6.38%(0.125Tv)	PASS
UVA (315nm~380nm)	0.00%	<=51.02%(Tv)	PASS
Tmin (475nm~650nm)	0.09%	>=10.20%(0.2Tv)	REF.
Color CIE			
Day light (D65)	X:0.561 Y:0.436		REF.
YELLOW	X:0.601 Y:0.398		PASS
GREEN	X:0.449 Y:0.544		REF.

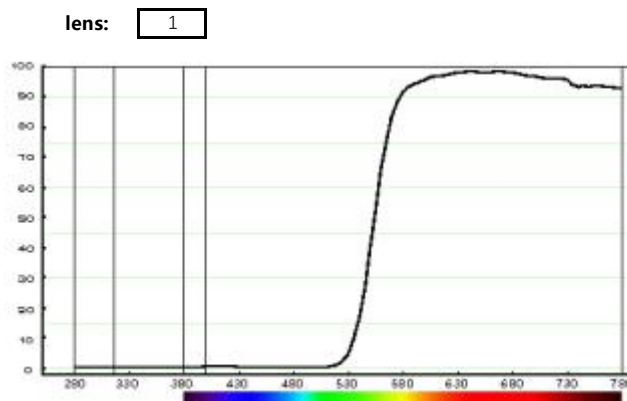

CIE 1976 L*,a*,b* col L*= 76.02 a*= 42.35 b*= 125.73

Δp%= 100.00% P%= 100.00% Photochromic= 0.00 UV400= 0.00

Spectrum Data:

780	92.95	775	93.03	770	93.39	765	93.32	760	93.63	755	93.54	750	93.35	745	93.72
740	93.12	735	93.98	730	95.68	725	96.08	720	95.96	715	96.12	710	96.28	705	96.42
700	96.73	695	97.10	690	97.39	685	97.87	680	98.05	675	98.25	670	98.31	665	98.34
660	98.23	655	98.23	650	98.26	645	98.38	640	98.35	635	98.08	630	97.92	625	97.62
620	97.34	615	97.01	610	96.82	605	96.39	600	95.84	595	95.05	590	94.13	585	93.14
580	91.27	575	88.38	570	83.41	565	75.87	560	65.63	555	53.04	550	39.14	545	26.49
540	16.28	535	8.87	530	4.38	525	1.96	520	0.81	515	0.32	510	0.16	505	0.11
500	0.09	495	0.10	490	0.11	485	0.13	480	0.13	475	0.14	470	0.12	465	0.12
460	0.15	455	0.16	450	0.20	445	0.21	440	0.23	435	0.25	430	0.27	425	0.31
420	0.35	415	0.37	410	0.49	405	0.55	400	0.61	395	0.03	390	0.04	385	0.04
380	0.05	375	0.00	370	0.00	365	0.00	360	0.00	355	0.00	350	0.00	345	0.00
340	0.00	335	0.00	330	0.00	325	0.00	320	0.00	315	0.00	310	0.00	305	0.00
300	0.00	295	0.00	290	0.00	285	0.00	280	0.00						

CIE 1931 XYZ

