FBELE	**SPECIFICATIONS**	**DESIGNED**	
		CHECKED	
	TYPE NO. **FBF50-1T**	**APPROVED**	

1. PRODUCT OUTLINE


1-1 SCOPE	*This specification is a super-thin speaker for all kinds of music devices*
1-2 DIMENSIONS	*As shown in fig (1)*
1-3 NET WEIGHT	*APPROX. 13grams*
1-4 OPERATING TEMPERATURE	*-30℃ to +70℃*
1-5 STORAGE TEMPERATURE	*-40℃ to +85℃*

2. ELECTROACOUSTIC CHARACTERISTICS

2-1 TEST SET UP	*Measuring conditions and procedures shown in fig(2)*
2-2 IMPEDANCE	*8± 15% ohm (at 2.5 KHz，1V input)*
2-3 SOUND PRESSURE LEVEL	*92.0 ± 3 dB SPL /0.1W/0.1m at (1000、1200、1500、2000)Hz AVG*
2-4FREQUENCY RESPONSE CURVE	*As shown in fig(3)*
2-5 RESPONSE FREQUENCY	*550±20% Hz*
2-6 INPUT POWER (NOM./MAX.)	*1W /2W must be normal at a white noise (1.5W) for one minute*
2-7 AUDIBLE NOISE	*Must be free audible noise (buzzes and rattles)(200 ~5KHz frequency range ,input level up to 1.53Vrms)*
2-8 DISTORTION	*Less than 15% 1KHz input 0.5W*
2-9 POLARITY	*Diaphragm shall be move forward when applies a positive DC.Current to the "+",the red wire is the "+"*


FBELE	**SPECIFICATIONS**	**DESIGNED**	
		CHECKED	
	TYPE NO. FBF50-1T	**APPROVED**	

3. RELIABLE TEST

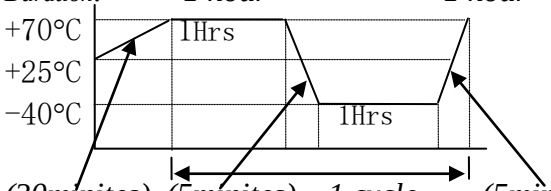3-1GENERAL	*After any following tests the response at 1 KHz shall not deviate more than ±3 dB from the initial value*
3-2 LOAD TEST	*Input power: 1W,white noise 48 hours*
3-3 HUMIDITY TEST	*Temperature: +40℃±3℃ Relative Humidity: 90%~95%RH* *Duration: 96 hours (recovery 6 hours)*
3-4 DROP TEST	*Height: 1.5m* *Cycle: 6 cycles*
3-5 VIBRATION TEST	*Frequency: 10~55~10Hz Oct/min Amplitude: 1.5mm* *Duration: 2 hours in each 3axes*
3-6TEMPERATURE SHOCK TEST	*Temperature: -40°±3℃ +70°±3℃ Cycle: 10 cycles* *Duration: 1 hour 1 hour (recovery 2 hours)*  *(30minites) (5minites) 1 cycle (5minites)*
3-7HIGH TEMPERATURE TEST	*Temperature: +70℃±3℃* *Duration: 96 hours*
3-8LOW TEMPERATURE TEST	*Temperature: -40℃±3℃* *Duration: 96 hours*
3-9TERMINAL STRENGTH TEST	*Load : 1.0Kg* *Duration: 5sec. (Shall be normal)*

FBELE	**SPECIFICATIONS**	**DESIGNED**	
		CHECKED	
	TYPE NO. FBF50-1T	**APPROVED**	


4. DIMENSIONS (fig. 1)

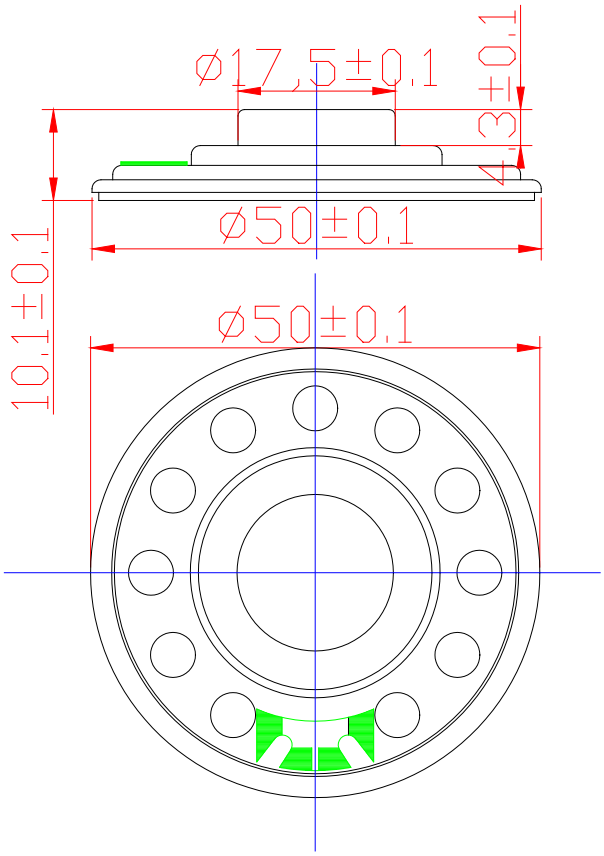

No.	PART NAME	MATERIAL	Q'TY	REMARK
11	LEAD WIRE			Black /red
10	TERMINAL BASE	1375-02R	1	
9	DAMPER	CLOTH	1	
8	VOICE COIL	COPPER WIRE	1	
7	GASKET 1	NET	1	
6	POLE PIECE	SPCC	1	
5	MAGNET	Nd-Fe-B	1	
4	U U YOKE	SPCE	1	
3	FRONT CAP	无	无	
2	DIAPHRAGM	PEN	1	
1	FRAME	PBT+20%GF	1	


FBELE	SPECIFICATIONS	DESIGNED	
		CHECKED	
	TYPE NO. FBF50-BT	APPROVED	

5. *MICRO SPEAKER MEASURING CONDITION (fig.2)*

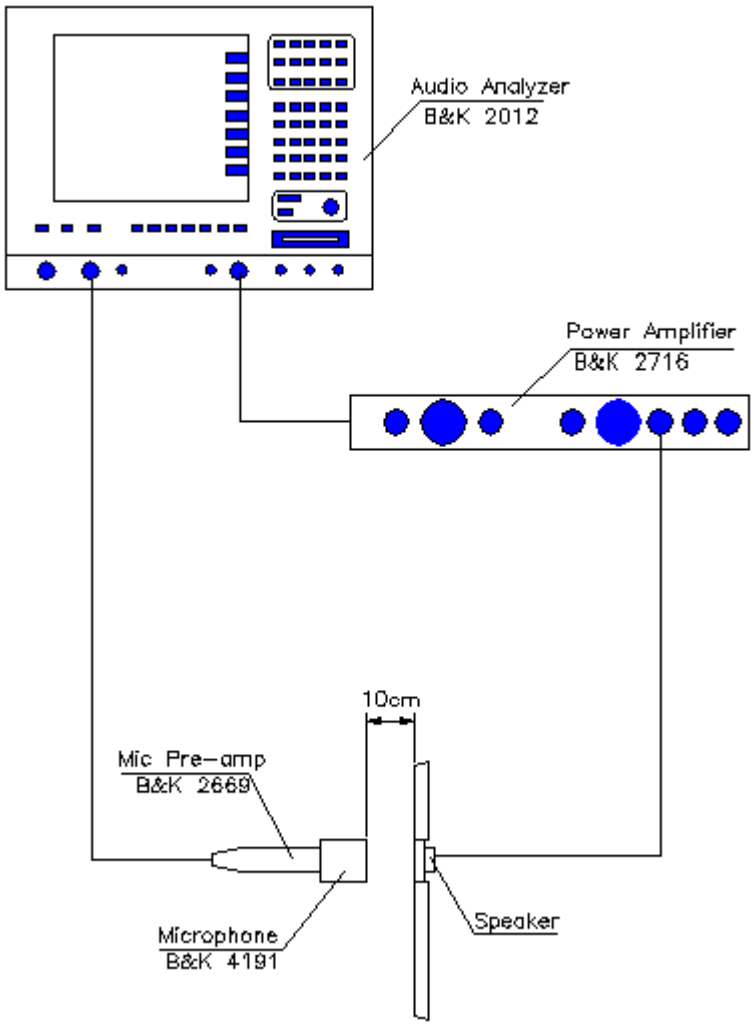

FBELE	**SPECIFICATIONS**	**DESIGNED**	
		CHECKED	
	TYPE NO. FBF50-1T	**APPROVED**	

6. MICRO SPEAKER FREQUENCY RESPONSE CURVE (fig.4)

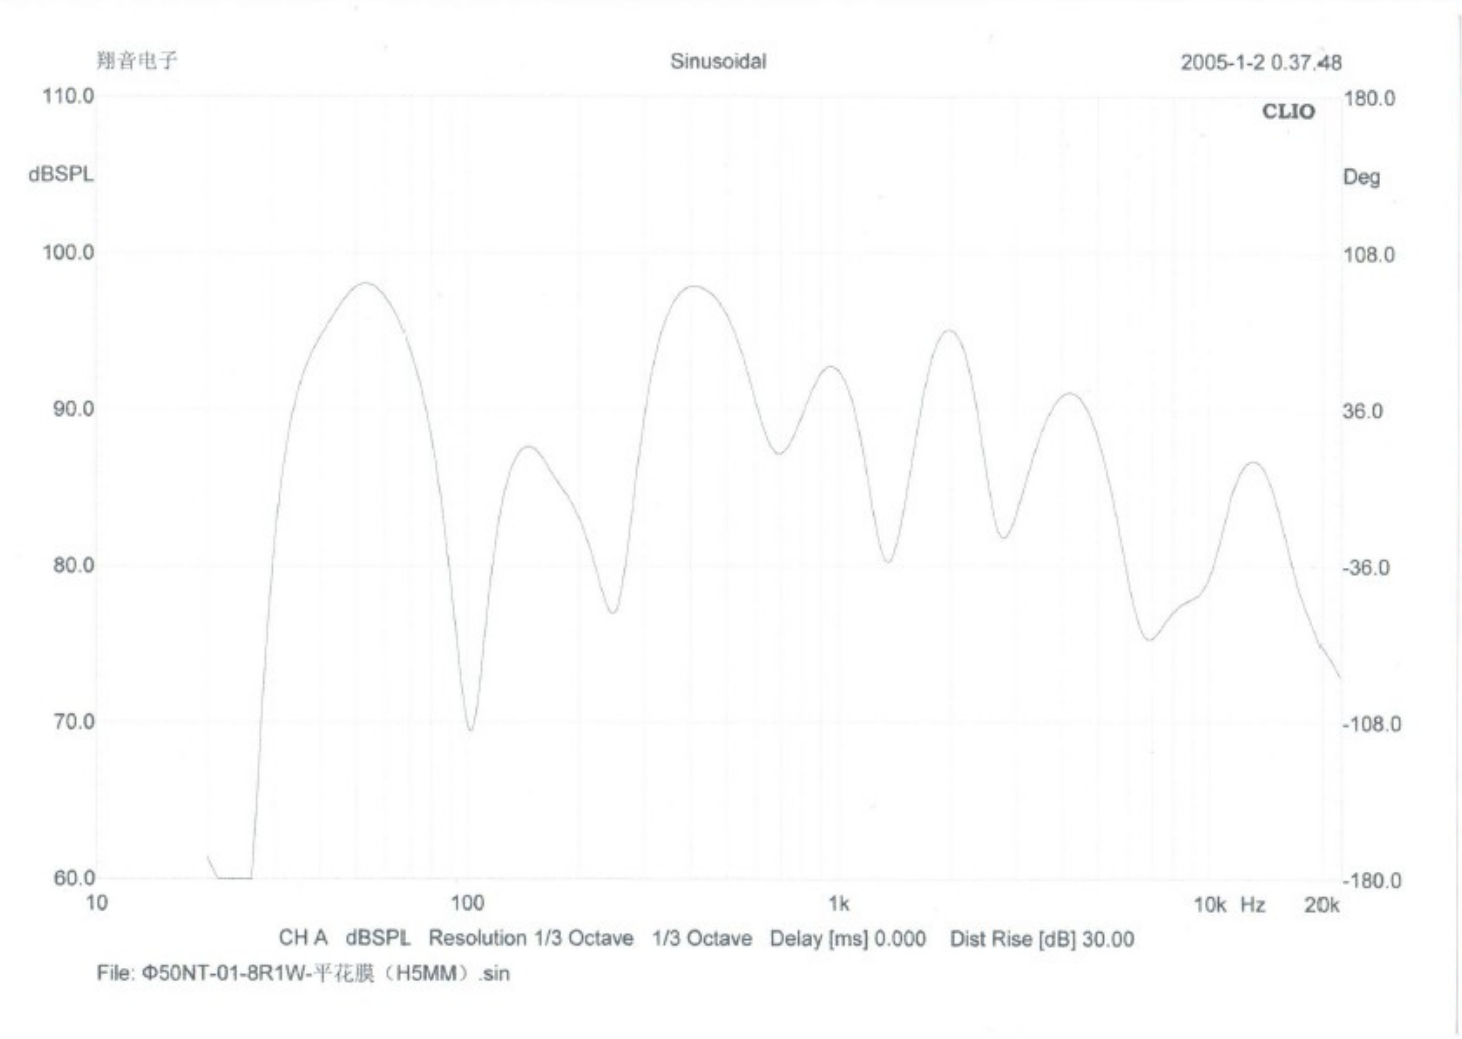

FBELE	**SPECIFICATIONS**		**DESIGNED**	
			CHECKED	
	TYPE NO.	FBF50-1T	**APPROVED**	

7. PACKAGE (fig.4)

200pcs of speaker in each tray
10 trays in one carton
Total:2000 pcs / 1 carton
Gross Weight: 15 KGS
Net Weight: 14KGS

