Measurement: Gain / Phase
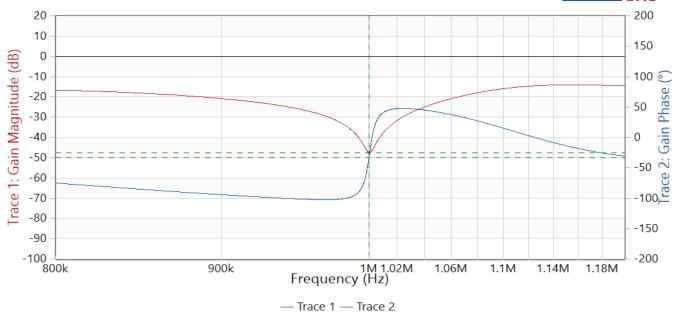
	Cursor 1		
Frequency	1 MHz		
Trace 1	**Magnitude (dB)**		
Measurement	-47.48 dB		
Trace 2	**Phase (°)**		
Measurement	-33.223 °		

Sweep

Start frequency:	800 kHz
Stop frequency:	1.2 MHz
Center frequency:	1 MHz
Span:	400 kHz
Sweep mode:	Logarithmic
Numer of points:	16501

Hardware setup

Device type:	Bode100R2
Serial number:	QH681K
Receiver bandwidth:	1 kHz
Output level:	0 dBm
DUT settling time:	0 s

Calibration	Full-Range	User-Range
Gain	-	-

Termination	Channel 1	Channel 2
Gain	1 MΩ	1 MΩ

Attenuator setting	Channel 1	Channel 2
Transmission	20 dB	20 dB