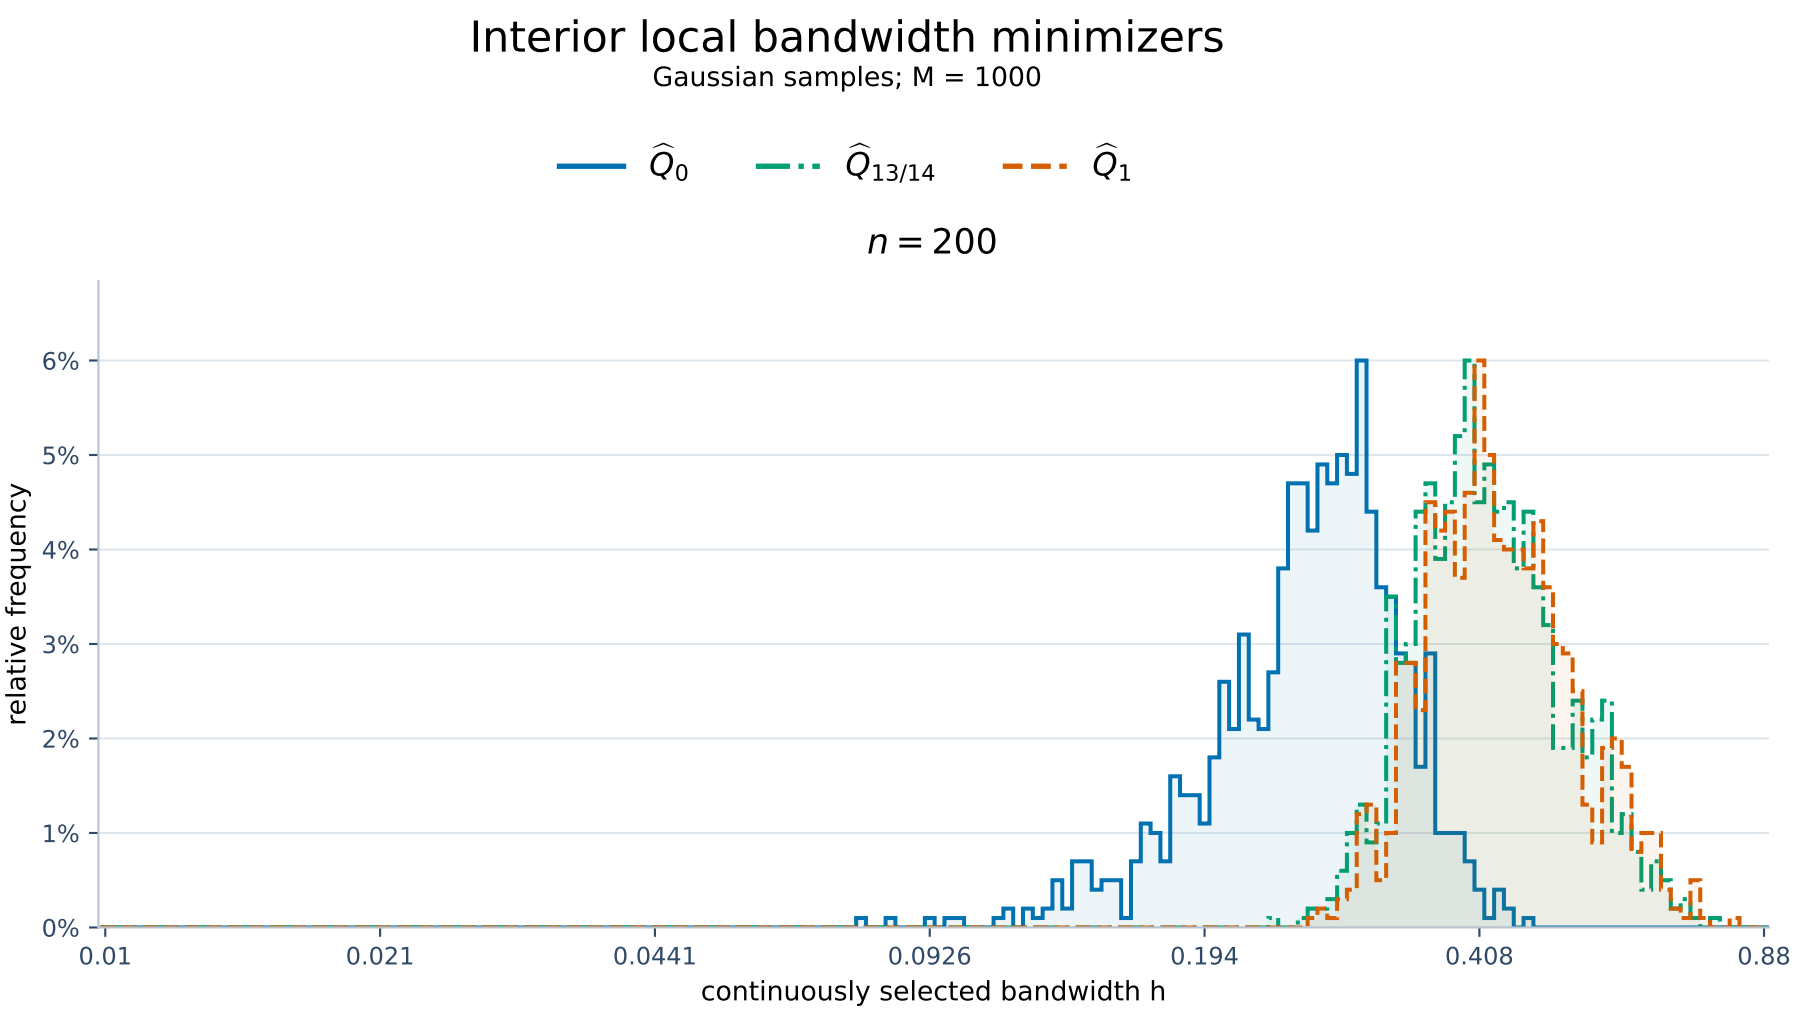
Interior local bandwidth minimizers
Gaussian samples; M = 1000
$\widehat{Q}_0$
$\widehat{Q}_{13/14}$
$\widehat{Q}_1$
$n = 200$
relative frequency
6%
5%
4%
3%
2%
1%
0%
0.01
0.021
0.0441
0.0926
0.194
0.408
0.88
continuously selected bandwidth h
Bin frequencies divide by all 1,000 samples.
Lowest-energy interior minimum selected when several exist.