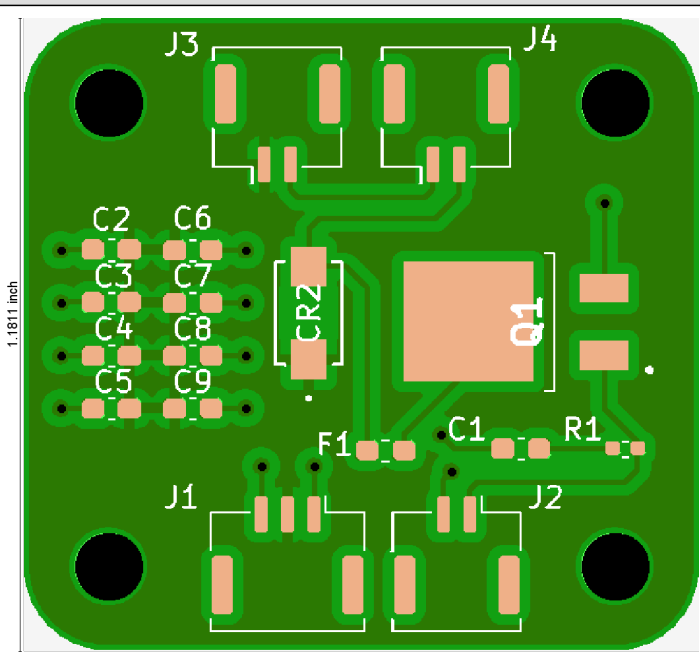
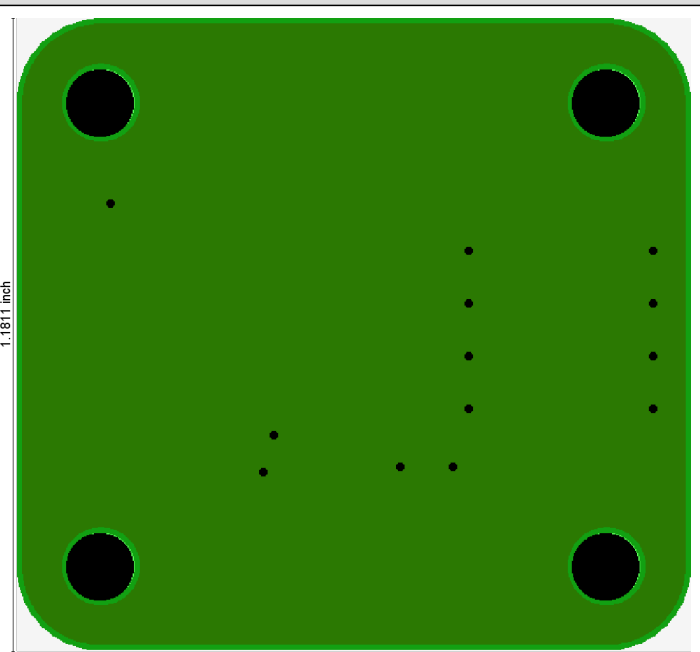


Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Single PCB View - Original

Top View	Bottom View
	

Summary - General - Original

PCB Size	1.2598 inch x 1.1811 inch	Customer Panel Size	
PCB Thickness	62.992 mil	Max. Aspect Ratio on PTH	4.0
Copper Layers	2	Pressing Stages	1
Surface Finish	None	Drill Hole Density	12 Holes/inch ²
Solder Mask	Both	Testable Points	44
Solder Mask Color	Green	Min. SMD/BGA Size	23.62 mil
Legend	Top Only	Via in Pad (PTH)	No
Legend Color	White	Via in Pad (Blind)	No
Edge Connector Area	0 inch ²	Holes in Paste (PTH)	No
Peeloff Mask	No	Holes in Paste (Blind)	No
Carbon Mask	No	Stacked Vias	
Anomalies	No	Castellated	No

Summary - Copper Layer Minima - Original

Type	Copper Width	Critical Copper Width	Trace Width	Critical Trace Width	Copper to Copper Clr.	Trace to Trace Clr.	Same Net Clr.	Ring	Copper to Outline Clr.
	mil	mil	mil	mil	mil	mil	mil	mil	mil
Outer	¹ 9.84	² 9.84	³ 9.84	⁴ 9.84	⁵ 18.90	⁶ 29.53	⁷ 9.81	⁸ 7.87	⁹ 10.02

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Summary - Copper Layer Minima - Original

Type	Copper to Plated Clr.				Copper to NPTH Clr.			
	Overall	to Pad	to Trace	to Region	Overall	to Pad	to Trace	to Region
	mil	mil	mil	mil	mil	mil	mil	mil
Outer	10 27.89	>32.00	>32.00	11 27.89	12 9.86	>64.00	>64.00	13 9.86
Inner								

Summary - Sequences - Original


Type	Sequences	Tools	Min. End Dia.	Max. End Dia.	Holes	Routs	Ring on Outer	Ring on Inner	Hole to Copper Clr.
			mil	mil			mil	mil	mil
PTH	1	1	15.75	15.75	13	0	7.87		27.89
NPTH	1	1	125.98	125.98	4	0	>32.00		9.86
Total	2	2	15.75	125.98	17	0	7.87		9.86

Summary - Rout - Original

Type	Tools	Min. End Dia.	Max. End Dia.	Rout Length
		mil	mil	mil
Plated				
NPTH				
Total				

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Stackup - Original

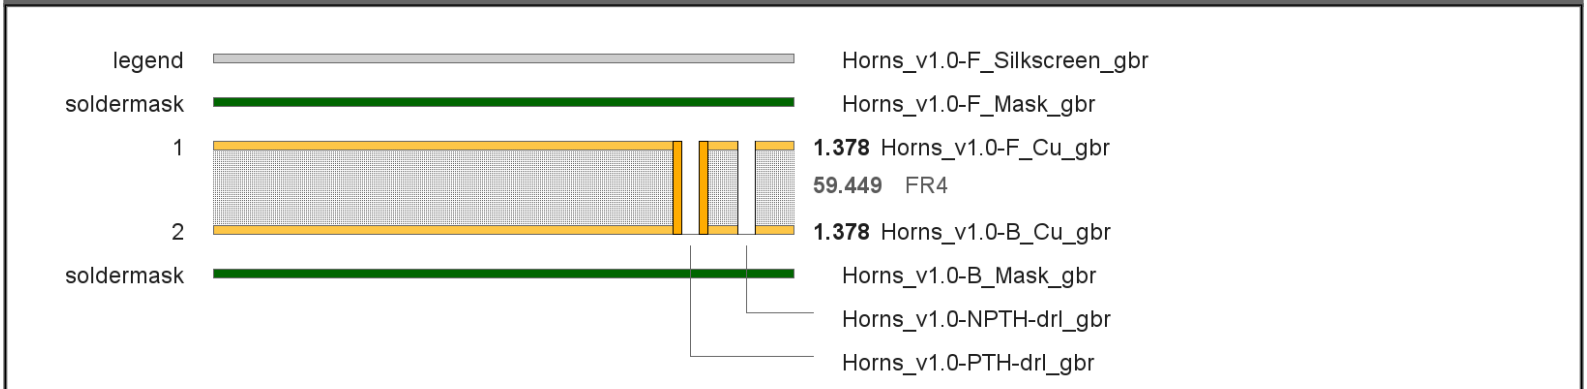

Pressing Stages	1
-----------------	---

Files - Original

Initial	Renamed	Function	Position	Color	Thickness	
					Base	Finished
					mil	mil
Horns_v1.0-F_Paste.gbr		paste	top			
Horns_v1.0-F_Silkscreen.gbr		silk	top	white	unknown	unknown
Horns_v1.0-F_Mask.gbr		mask	top	green	0.39	unknown
Horns_v1.0-F_Cu.gbr		outer	1		1.38	unknown
Horns_v1.0-B_Cu.gbr		outer	2		1.38	unknown
Horns_v1.0-B_Mask.gbr		mask	bottom	green	0.39	unknown
Horns_v1.0-NPTH-drl.gbr		nonplated	1-2			
Horns_v1.0-PTH-drl.gbr		plated	1-2			
Horns_v1.0-B_Paste.gbr		empty	none			
Horns_v1.0-B_Silkscreen.gbr		empty	none			
Horns_v1.0-Edge_Cuts.gbr		cad_outline	none			







PCB (Single) - Original

PCB Size	Outline Type	Outline Length	Outline Area	Copper Layers	PCB Thickness
inch x inch		inch	inch ²		mil
1.2598 x 1.1811	real	4.6115	1.4667	2	62.99

Customer Panel (Delivery Array, Assembly Panel) - Original

Original Image	Panel Size	Left	Right	Top	Bottom	X Spacing	Y Spacing	PCB's	Depanel Rout Length
	inch x inch	inch	inch	inch	inch	inch	inch		mil

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Production Panel (Fabrication Panel) - Original						
Panel Name	Panel Size	Useful Area	Drawing	Pieces/Panel	Panel Fill	Panel Usage
	inch x inch	inch x inch			%	%
24x20	24.0158 x 20.0000	23.2284 x 19.2126		224	98	68
32x24	31.9685 x 24.0158	31.1811 x 23.2284		357	97	68
28x24	27.9921 x 24.0158	27.2047 x 23.2284		306	95	67
24x18	24.0158 x 17.9921	23.2284 x 17.2047		192	94	65
18x12	17.9921 x 12.0079	17.2047 x 11.2205		88	88	60
13x12	12.9921 x 12.0079	12.2047 x 11.2205		56	62	53

Thickness - Original
No license to generate this information.

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Copper Layer Minima & Area - Original

File	Pos.	Copper Width	Critical Copper Width	Trace Width	Critical Trace Width	Copper to Copper Clr.	Same Net Clr.	Copper Area	
		mil	mil	mil	mil	mil	mil	inch ²	%
Horns_v1.0-F_Cu_gbr	1	9.84	9.84	9.84	9.84	18.90	9.81	1.0408	71
Horns_v1.0-B_Cu_gbr	2	>16.00	>16.00	>16.00	>16.00	>32.00	>32.00	1.3540	92

Copper Layer Minima - Copper to Drill Minima - Original

File	Pos.	Ring					Copper to Drill Clr.		Copper to Outline Clr.			
		Overall	Via	Laser Via	Comp.	Mech.	Plated	NPTH	Overall	to Pad	to Trace	to Region
		mil	mil	mil	mil	mil	mil	mil	mil	mil	mil	mil
Horns_v1.0-F_Cu_gbr	1	7.87	7.87				27.89	9.86	10.02	>64.00	>64.00	10.02
Horns_v1.0-B_Cu_gbr	2	>32.00	>32.00				>32.00	9.86	10.02	>64.00	>64.00	10.02

Copper Layers - Copper to Copper Clearances - Original

File	Pos.	Copper to Copper Clr.						
		Overall	Pad to Pad	Pad to Trace	Pad to Region	Trace to Trace	Trace to Region	Region to Region
		mil	mil	mil	mil	mil	mil	mil
Horns_v1.0-F_Cu_gbr	1	18.90	18.90	20.88	20.02	29.53	20.02	>32.00
Horns_v1.0-B_Cu_gbr	2	>32.00	>32.00	>32.00	>32.00	>32.00	>32.00	>32.00

Copper Areas - Original

Side	Total	Free of					Edge Connectors		
		Solder Mask (as supplied)		Solder Mask (open vias)	Gold Mask	Silver Mask	Fingers	Finger Size	Total Area
	inch ²	inch ²	%	inch ²	inch ²	inch ²		mil x mil	inch ²
Top (incl. 1/2 plated holes and routs)	1.0587	0.1518	10	0.1737					
Bottom (incl. 1/2 plated holes and routs)	1.3719	0.0000	0	0.0219					
Total (incl. plated holes and routs)	2.4306	0.1518		0.1956			0		
Plated holes and routs	0.0406	0.0000		0.0406					
Top (without plated holes and routs)	1.0384	0.1518		0.1534					
Bottom (without plated holes and routs)	1.3516	0.0000		0.0016					
Total (without plated holes and routs)	2.3900	0.1518		0.1550					

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Drill Tools - Original															
File	Tool Nr.	Span	Type	Function	Method	Filled Via	Counter	Dia.	Tol. -	Tol. +	Holes in PCB	Routs in PCB	Double Hits	Predrill Hits	Wall Area
								mil	mil	mil					inch ²
Horns_v1.0-NPTH-drl_gbr	10	1-2	NPTH	mech.	mech.	unknown	unknown	125.98	0.00	0.00	4	0	0	0	0.0997
Horns_v1.0-PTH-drl_gbr	10	1-2	PTH	via	mech.	unknown	unknown	15.75	0.00	0.00	13	0	0	0	0.0405

Drill Tools - Drill vs Copper - Original															
File	Tool Nr.	Span	Type	Function	Method	Dia.	Ring on Outer	Ring on Inner	Min. Pad Size	Via in Pad	Holes in Paste	Plated to Copper Clr. 			
												Overall	to Pad	to Trace	to Region
						mil	mil	mil	mil			mil	mil	mil	mil
Horns_v1.0-NPTH-drl_gbr	10	1-2	NPTH	mech.	mech.	125.98	>32.00								
Horns_v1.0-PTH-drl_gbr	10	1-2	PTH	via	mech.	15.75	7.87		31.49	0	0	27.89	>32.00	>32.00	27.89

Sequences - Original											
Span	Type	Tools	Min. End Dia.	Max. End Dia.	Holes	Ring on Outer	Ring on Inner	Hole to Copper Clr.	Hole to Outline Clr.	Slot to Outline Clr.	
			mil	mil		mil	mil	mil	mil	mil	
1-2	PTH	1	15.75	15.75	13	7.87		27.89	61.02	>256.00	
1-2	NPTH	1	125.98	125.98	4	>32.00		9.86	94.49	>256.00	
All	All	2	15.75	125.98	17	7.87		9.86	61.02	>256.00	

Rout Tools - Original						
File			Tool Nr.	Type	Tool Dia.	End Dia.
					mil	mil

Routed Holes - Original						
File			Hole Nr.	Instances	X Size	Y Size
					mil	mil

Sequences Analysis - Original	
No license to generate this information.	

SMD (Incl. BGA) - Original										
Side	SMD (Incl. BGA)				SMD (Excl. BGA)	BGA				
	Pads	Min. Pad	Pitch of Min. Pad	Solder Mask Defined Pads	Pads	Pads	Min. Pad	Min. Pitch	All Tracks Centered	Drilled Pads
		mil	mil				mil	mil		
Top	44	23.62	49.21	0	44	0				
Bottom	0			0	0	0				
Both	44			0	44	0				

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Solder Mask - Original

Side	Mask to Mask Clr.	Web	Ring on Cu Defined Pads	Ring on SM Defined Pads	Mask to Copper Clr.	Mask Opening	Fully Covered Via Holes	Partly Covered Via Holes	One Side Covered Vias	Both Sides Covered Vias	No Side Covered Vias
	mil	mil	mil	mil	mil	mil					
Top	>10.00	>10.00	>10.00	>10.00	9.86	23.62	Yes	No			
Bottom	>10.00	>10.00	>10.00	>10.00	9.86	125.98	Yes	No			
Both	>10.00	>10.00	>10.00		9.86	23.62	Yes	No	No	Yes	No

Carbon Masks - Original

File	Position	Carbon Width	Carbon to Carbon Clr.	Clr. to Plated Hole	Clr. to Outline	Layer Area	
		mil	mil	mil	mil	inch ²	%

Peeloff Masks - Original

File	Position	Min. Peelable Width	Peelable to Peelable Clr.	Clr. to Plated Hole	Clr. to Outline	Layer Area	
		mil	mil	mil	mil	inch ²	%

Legend Layers - Original

File	Position	Legend Width	Legend to Legend Clr.	Legend to Cu Defined Pad Clr.	Legend to SM Defined Pad Clr.		Layer Area	
				Comp/SMD/BGA	Comp/SMD/BGA	Via		
		mil	mil	mil	mil	mil	inch ²	%
Horns_v1.0-F_Silkscreen_gbr	top	3.94	2.40	0.00	>10.00	>10.00	0.0374	3

Gold Layers - Original

File	Position	Gold to Gold Clr.	Clr. to Outline	Layer Area	
		mil	mil	inch ²	%

Heatsink Layers - Original

File	Position	Heatsink to Heatsink Clr.	Clr. to Outline	Layer Area	
		mil	mil	inch ²	%

Scoring - Minimum Clearance - Original

File	Pos.	Copper to Score Top	Copper to Score Right	Copper to Score Bottom	Copper to Score Left
		mil	mil	mil	mil
Horns_v1.0-F_Cu_gbr	1	10.02	10.02	10.02	10.02
Horns_v1.0-B_Cu_gbr	2	10.02	10.02	10.02	10.02

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Scoring - Routing (based on outline analysis) - Original

Side	Lines	Score Lines Clr.	Saved Routing	Remaining Routing
		mil	mil	mil
Horizontal Score Lines				
Top	1	10.02	>64.00	
Mid	0			
Bottom	1	10.02	>64.00	
Vertical Score Lines				
Left	1	10.02	>64.00	
Mid	0			
Right	1	10.02	>64.00	
All Score Lines				
	4	10.02	3622.04	989.46

Bare Board Test - Original

Side	Testable Points (TPs)	Max. TP Density	SMD Pads	Min. SMD Pad	Pitch of Min. SMD Pad	Edge Connector Fingers	Number of Nets
		TP/inch ²		mil	mil		
Top	44	52	44	23.62	49.21	0	
Bottom	0	0	0			0	
Both	44	52	44			0	15

Input Remarks - Original

Gerber import: Invalid coincident draw, continuing without cleanup 'Horns_v1.0-F_Cu.gbr'
Gerber import: Invalid contour, continuing with an interpretation. Cannot be cleaned up automatically. Must be cleaned up manually. 'Horns_v1.0-F_Cu.gbr' (at line 3154)
Layer does not contain any image data (demoted to 'empty') 'Horns_v1.0-B_Paste_gbr'
Layer does not contain any image data (demoted to 'empty') 'Horns_v1.0-B_Silkscreen_gbr'
Gerber Job File import: DISCREPANCY: Extra bottom layers mismatch between Gerber Job File and current job stackup.
Gerber Job File import: OMITTED: \$.MaterialStackup[7] not added to layer attributes because corresponding layer could not be found.
Gerber Job File import: OMITTED: \$.MaterialStackup[8] not added to layer attributes because corresponding layer could not be found.

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Delivery Times & Quantities - Original

Delivery Times & Quantities			
Delivery Time 1		Quantity 1	
Quantity 2		Quantity 3	
Quantity 4		Quantity 5	
Quantity 6		Quantity 7	
Delivery Time 2		Quantity 1	
Quantity 2		Quantity 3	
Quantity 4		Quantity 5	
Quantity 6		Quantity 7	
Delivery Time 3		Quantity 1	
Quantity 2		Quantity 3	
Quantity 4		Quantity 5	
Quantity 6		Quantity 7	
Requested Ship Date		Ordered Qty	
Release Date		Dock Date	
Unit Value		Total Value	
Tax Amount		Total Value Inc Tax	
Gross Margin		Actual Turn Time	
Production Priority		T-Shirt	
T-Shirt Choice			

Process Parameters - Original

Used units			
Copper Thickness Unit		All Other Units	

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Process Parameters - Original			
Technology			
Board Class		Controlled Impedance	
Controlled Dielectric		Blind / Buried Drills	
Drill Size Tolerance		Conformal Coating	
ROHS compliant		Filled Vias present	
Filled Vias type		Lead Free	
Layer Count		Blank Layer	
Minimum Hole Size		Edge Plating	
ITAR		CU Base Thickness Outer	
CU Base Thickness Inner		Copper in Holes	
Panel Size X		Panel Size Y	
Panel Quantity		Board in Panel Quantity	
Material Type		Special Materials	
Material Thickness Tolerance		PCB Thickness Measured Over	

Process Parameters - Original			
Copper Areas			
Solder Mask		Solder Mask Type	
Legend		Double Mask Coating	
Mask Plug		Lamination	
PCB Finish		UL	
UL and Date Code		Date Code	
Date Code Type			

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Process Parameters - Original

Mechanical			
Outline Tolerance		V-Scoring	
Drill Countersink		Number of Countersinks	
Drill Half Holes		No Route Panel Form	
Rout Inside Outline		Depth Rout	
Individual Route		Milling	
TAB Route		Rout V-cut	
Slots - Cutouts		Gold Type (Body)	
Nickel		Nickel Type (Body)	
Gold Tips		Gold Thickness (Tips)	
Gold Type (Tips)		Nickel Type (Tips)	
Selective Plating		Selective Gold Area	
Gold Type (Selective)		Nickel Type (Selective)	
Edge Connector		Desmear	
Edge Plating		Array Data Provided	
Array Data ID		Best Fit Array	
Array Required		Rejects on Array allowed	
Array Size X		Array Size Y	
Number Up Per Array		Number Up Per Array in X	
Number Up Per Array in Y		Spacing In X	
Spacing In Y		Border Width Top	
Border Width Bottom		Border Width Left	
Border Width Right			

Process Parameters - Original

Quality			
Electrical test Required		Test voltage	
TDR Required		Cross Section Level	
FAI Report		Solder Sample	
Array Approval by Customer		Array Contact	
Array Approval Email		Stencil Included	
Checkplots required		Fab Drawing	
Ionic testing Report		Material Certifications Required	
X Outs allowed		Other Report Required	

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Customer and Job Identification - Original

Customer			
Customer	InstantDFM	Customer Service Alert	
Contact Person		Contact Phone	
Email		Buyer Person	
Buyer Phone		Buyer Email	
Tech Contact		Tech Phone	
Tech Email		24HR Phone	
Bill To Line 1		Bill To Line 2	
Bill To City		Bill To Zip Code	
Bill To State		Bill To Country	
Bill to Contact Name		Bill to Contact Email	
Bill to Contact Phone		Ship To Line 1	
Ship To Line 2		Ship To City	
Ship To Zip Code		Ship To State	
Ship To Country		Ship to Contact Name	
Ship to Contact Email		Ship to Contact Phone	
Shipping Method		Shipping Remarks	
Ship Extras		Account Remarks	
FreightAmount		Taxable	

Customer and Job Identification - Original

Job			
Article Id		Board Id	
Part Number		Revision	
Customer Purchase Order		Old Id	
CRM Notes		Quote#	
Quoted By		Order#	
Order Date		Order Remarks	
Tool#		Previous Tool#	
Sales ID		Sales Rep	
Order Specials		Job Type	
Product Mix		InstantDFM Engineering Review	
NPI Engineering Review		InstantDFM Order Number	
Big Commerce Order Number		Drawing Number	
DFM Line Number		DFM Total Number of Lines	
Discount Code		Made In USA	
InstantDFM Payment Method			

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

For automation only - users should ignore - Original

Automation

Override job thickness


Override job solder mask color

Override job legend color

Comments - Original


Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

Summary Minimum Design Characteristics - Locations - Original

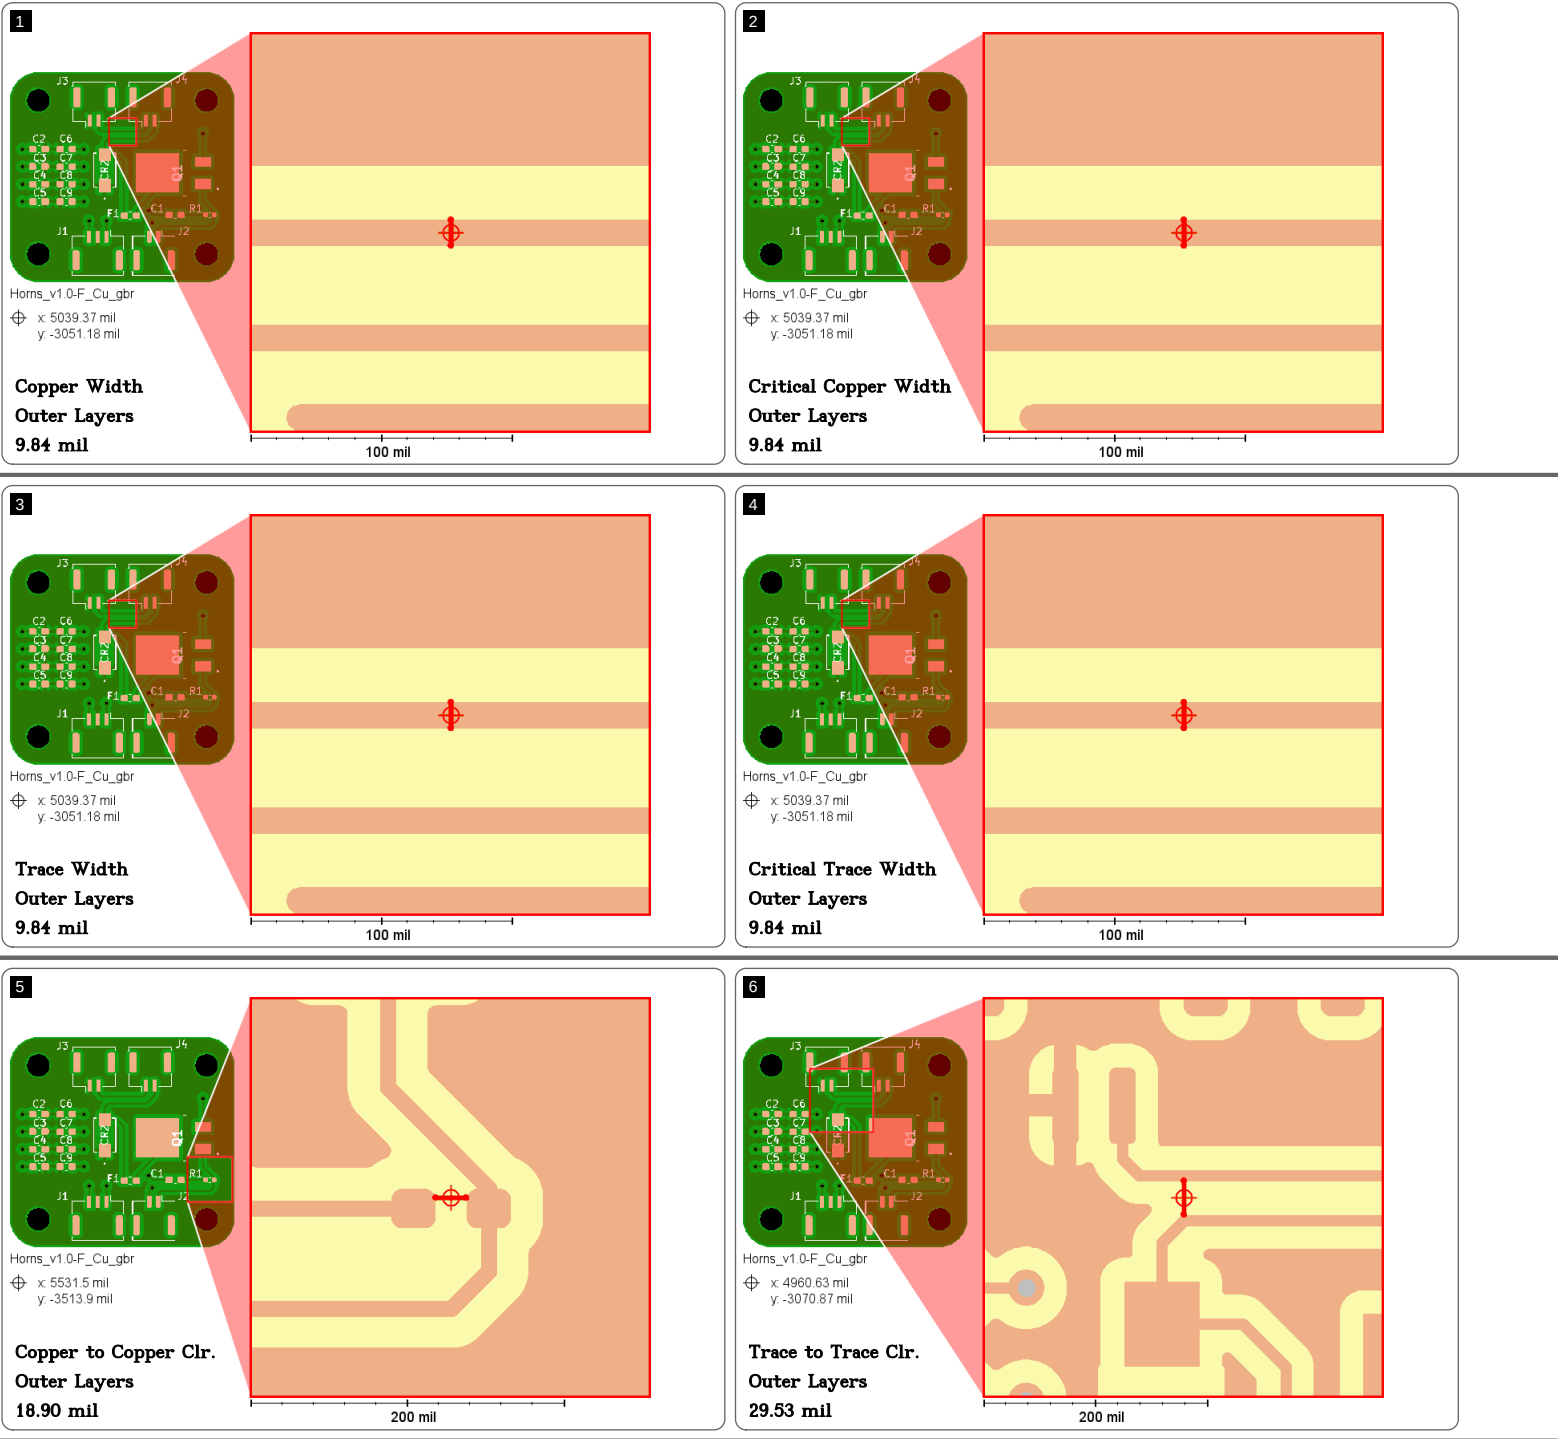

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

7




Horns_v1.0-F_Cu_gbr
⊕ x: 4648.01 mil
y: -3134.07 mil

Same Net Clr.
Outer Layers
9.81 mil

100 mil

8




Horns_v1.0-F_Cu_gbr
⊕ x: 4478.35 mil
y: -3444.88 mil

Ring
Outer Layers
7.87 mil

100 mil

9




Horns_v1.0-F_Cu_gbr
⊕ x: 4567.87 mil
y: -2721.54 mil

Copper to Outline Clr.
Outer Layers
10.02 mil

50 mil

10




Horns_v1.0-F_Cu_gbr
⊕ x: 4486.7 mil
y: -3465.04 mil

Copper to Plated Clr.
Outer Layers
27.89 mil

200 mil

11




Horns_v1.0-F_Cu_gbr
⊕ x: 4486.7 mil
y: -3465.04 mil

Copper to Plated Clr.
Outer Layers (to Region)
27.89 mil

200 mil

12



Horns_v1.0-F_Cu_gbr
⊕ x: 4532.97 mil
y: -2815.19 mil

Copper to NPTH Clr.
Outer Layers
9.86 mil

100 mil

Name	xma4o96e.zip	Id.	29709 - QED OK
Report Generated on	Sep 16, 2026, 8:32:41 PM	Customer	InstantDFM

