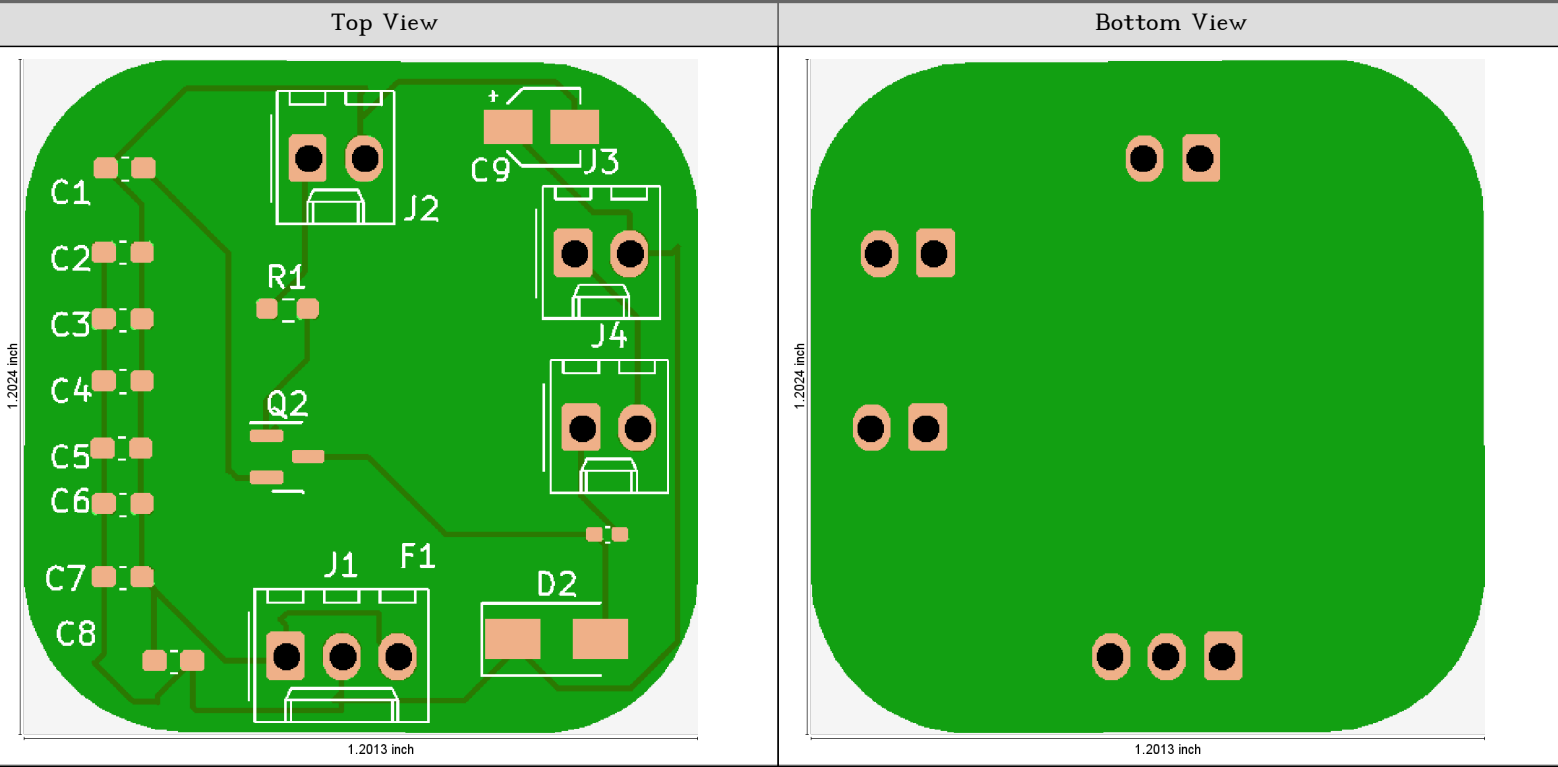


Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Single PCB View - Original



Summary - General - Original

PCB Size	1.2013 inch x 1.2024 inch	Customer Panel Size	
PCB Thickness	62.992 mil	Max. Aspect Ratio on PTH	1.3
Copper Layers	2	Pressing Stages	1
Surface Finish	None	Drill Hole Density	7 Holes/inch ²
Solder Mask	Both	Testable Points	45
Solder Mask Color	Green	Min. SMD/BGA Size	23.62 mil
Legend	Top Only	Via in Pad (PTH)	No
Legend Color	White	Via in Pad (Blind)	No
Edge Connector Area	0 inch ²	Holes in Paste (PTH)	No
Peeloff Mask	No	Holes in Paste (Blind)	No
Carbon Mask	No	Stacked Vias	
Anomalies	Yes	Castellated	No

Summary - Copper Layer Minima - Original

Type	Copper Width	Critical Copper Width	Trace Width	Critical Trace Width	Copper to Copper Clr.	Trace to Trace Clr.	Same Net Clr.	Ring	Copper to Outline Clr.
	mil	mil	mil	mil	mil	mil	mil	mil	mil
Outer	¹ 9.84	² 9.84	³ 9.84	⁴ 9.84	⁵ 10.01	>32.00	⁶ 8.86	⁷ 10.83	⁸ 2.77

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Summary - Copper Layer Minima - Original

Type	Copper to Plated Clr.				Copper to NPTH Clr.			
	Overall	to Pad	to Trace	to Region	Overall	to Pad	to Trace	to Region
	mil	mil	mil	mil	mil	mil	mil	mil
Outer	>32.00	>32.00	>32.00	>32.00				
Inner								

Summary - Sequences - Original

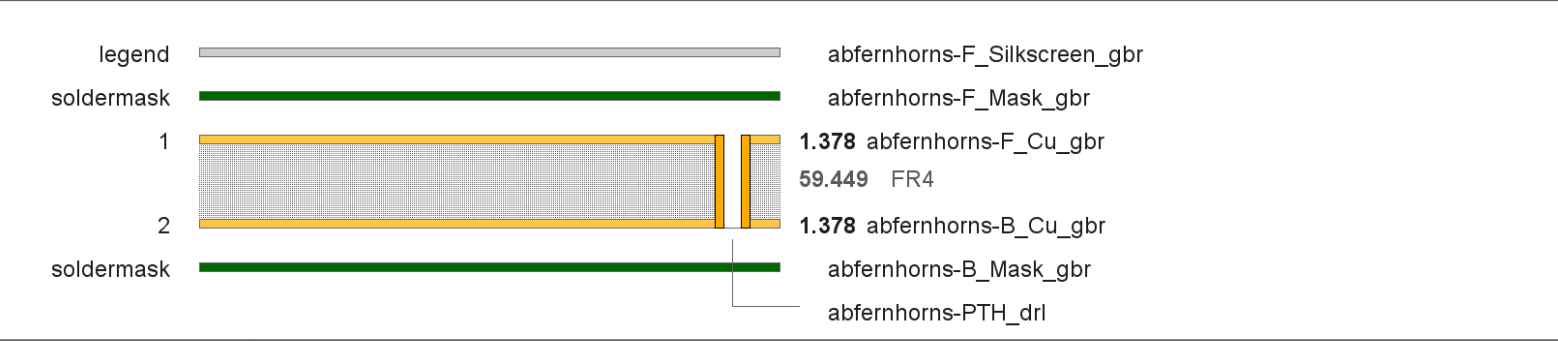
Type	Sequences	Tools	Min. End Dia.	Max. End Dia.	Holes	Routs	Ring on Outer	Ring on Inner	Hole to Copper Clr.
			mil	mil			mil	mil	mil
PTH	1	1	46.85	46.85	9	0	10.83		>32.00
Total	1	1	46.85	46.85	9	0	10.83		>32.00

Summary - Rout - Original

Type	Tools	Min. End Dia.	Max. End Dia.	Rout Length
		mil	mil	mil
Plated				
NPTH				
Total				

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Stackup - Original



Pressing Stages	1
-----------------	---

Files - Original

Initial	Renamed	Function	Position	Color	Thickness	
					Base	Finished
					mil	mil
abfernhorns-F_Paste.gbr		paste	top			
abfernhorns-F_Silkscreen.gbr		silk	top	white	unknown	unknown
abfernhorns-F_Mask.gbr		mask	top	green	0.39	unknown
abfernhorns-F_Cu.gbr		outer	1		1.38	unknown
abfernhorns-B_Cu.gbr		outer	2		1.38	unknown
abfernhorns-B_Mask.gbr		mask	bottom	green	0.39	unknown
abfernhorns-PTH.drl		plated	1-2			
abfernhorns-B_Paste.gbr		empty	none			
abfernhorns-B_Silkscreen.gbr		empty	none			
abfernhorns-Edge_Cuts.gbr		cad_outline	none			
abfernhorns-NPTH.drl		empty	none			







PCB (Single) - Original

PCB Size	Outline Type	Outline Length	Outline Area	Copper Layers	PCB Thickness
inch x inch		inch	inch ²		mil
1.2013 x 1.2024	real	4.3061	1.3673	2	62.99

Customer Panel (Delivery Array, Assembly Panel) - Original

Original Image	Panel Size	Left	Right	Top	Bottom	X Spacing	Y Spacing	PCB's	Depanel Rout Length
	inch x inch	inch	inch	inch	inch	inch	inch		mil

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Production Panel (Fabrication Panel) - Original						
Panel Name	Panel Size	Useful Area	Drawing	Pieces/Panel	Panel Fill	Panel Usage
	inch x inch	inch x inch			%	%
18x12	17.9921 x 12.0079	17.2047 x 11.2205		96	94	61
32x24	31.9685 x 24.0158	31.1811 x 23.2284		352	93	63
24x18	24.0158 x 17.9921	23.2284 x 17.2047		192	92	61
28x24	27.9921 x 24.0158	27.2047 x 23.2284		304	92	62
24x20	24.0158 x 20.0000	23.2284 x 19.2126		208	89	59
13x12	12.9921 x 12.0079	12.2047 x 11.2205		54	73	47

Thickness - Original
No license to generate this information.

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Copper Layer Minima & Area - Original

File	Pos.	Copper Width	Critical Copper Width	Trace Width	Critical Trace Width	Copper to Copper Clr.	Same Net Clr.	Copper Area	
		mil	mil	mil	mil	mil	mil	inch ²	%
abfernhorns-F_Cu_gbr	1	9.84	9.84	9.84	9.84	10.01	8.86	0.1759	13
abfernhorns-B_Cu_gbr	2	>16.00	>16.00	>16.00	>16.00	31.50	>32.00	0.0470	3

Copper Layer Minima - Copper to Drill Minima - Original

File	Pos.	Ring					Copper to Drill Clr.		Copper to Outline Clr.			
		Overall	Via	Laser Via	Comp.	Mech.	Plated	NPTH	Overall	to Pad	to Trace	to Region
		mil	mil	mil	mil	mil	mil	mil	mil	mil	mil	mil
abfernhorns-F_Cu_gbr	1	10.83			10.83		>32.00		2.77	55.52	2.77	>64.00
abfernhorns-B_Cu_gbr	2	10.83			10.83		>32.00		>64.00	>64.00	>64.00	>64.00

Copper Layers - Copper to Copper Clearances - Original

File	Pos.	Copper to Copper Clr.						
		Overall	Pad to Pad	Pad to Trace	Pad to Region	Trace to Trace	Trace to Region	Region to Region
		mil	mil	mil	mil	mil	mil	mil
abfernhorns-F_Cu_gbr	1	10.01	14.96	10.01	>32.00	>32.00	>32.00	>32.00
abfernhorns-B_Cu_gbr	2	31.50	31.50	>32.00	>32.00	>32.00	>32.00	>32.00

Copper Areas - Original

Side	Total	Free of					Edge Connectors		
		Solder Mask (as supplied)		Solder Mask (open vias)	Gold Mask	Silver Mask	Fingers	Finger Size	Total Area
	inch ²	inch ²	%	inch ²	inch ²	inch ²		mil x mil	inch ²
Top (incl. 1/2 plated holes and routs)	0.2019	0.1294	9	0.1294					
Bottom (incl. 1/2 plated holes and routs)	0.0730	0.0730	5	0.0730					
Total (incl. plated holes and routs)	0.2749	0.2024		0.2024			0		
Plated holes and routs	0.0834	0.0834		0.0834					
Top (without plated holes and routs)	0.1602	0.0877		0.0877					
Bottom (without plated holes and routs)	0.0313	0.0313		0.0313					
Total (without plated holes and routs)	0.1915	0.1190		0.1190					

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Drill Tools - Original

File	Tool Nr.	Span	Type	Function	Method	Filled Via	Counter	Dia.	Tol. -	Tol. +	Holes in PCB	Routs in PCB	Double Hits	Predrill Hits	Wall Area
								mil	mil	mil					inch ²
abfernhorns-PTH_dr1	1	1-2	PTH	comp.	mech.	unknown	unknown	46.85	0.00	0.00	9	0	0	0	0.0834

Drill Tools - Drill vs Copper - Original

File	Tool Nr.	Span	Type	Function	Method	Dia.	Ring on Outer	Ring on Inner	Min. Pad Size	Via in Pad	Holes in Paste	Plated to Copper Clr. 			
												Overall	to Pad	to Trace	to Region
						mil	mil	mil	mil			mil	mil	mil	mil
abfernhorns-PTH_dr1	1	1-2	PTH	comp.	mech.	46.85	10.83		68.51		0	>32.00	>32.00	>32.00	>32.00

Sequences - Original

Span	Type	Tools	Min. End Dia.	Max. End Dia.	Holes	Ring on Outer	Ring on Inner	Hole to Copper Clr.	Hole to Outline Clr.	Slot to Outline Clr.
			mil	mil		mil	mil	mil	mil	mil
1-2	PTH	1	46.85	46.85	9	10.83		>32.00	84.49	>256.00
All	All	1	46.85	46.85	9	10.83		>32.00	84.49	>256.00

Rout Tools - Original

File	Tool Nr.	Type	Tool Dia.	End Dia.	Rout Length	Nibble Count
			mil	mil	mil	

Routed Holes - Original

File	Hole Nr.	Instances	X Size	Y Size	Rout Length	Nibble Count
			mil	mil	mil	

Sequences Analysis - Original

No license to generate this information.
--

SMD (Incl. BGA) - Original

	SMD (Incl. BGA)				SMD (Excl. BGA)	BGA				
Side	Pads	Min. Pad	Pitch of Min. Pad	Solder Mask Defined Pads	Pads	Pads	Min. Pad	Min. Pitch	All Tracks Centered	Drilled Pads
		mil	mil				mil	mil		
Top	27	23.62	74.80	0	27	0				
Bottom	0			0	0	0				
Both	27			0	27	0				

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Solder Mask - Original

Side	Mask to Mask Clr.	Web	Ring on Cu Defined Pads	Ring on SM Defined Pads	Mask to Copper Clr.	Mask Opening	Fully Covered Via Holes	Partly Covered Via Holes	One Side Covered Vias	Both Sides Covered Vias	No Side Covered Vias
	mil	mil	mil	mil	mil	mil					
Top	>10.00	>10.00	>10.00	>10.00	>10.00	23.62	No	No			
Bottom	>10.00	>10.00	>10.00	>10.00	>10.00	68.50	No	No			
Both	>10.00	>10.00	>10.00		>10.00	23.62	No	No	No	No	No

Carbon Masks - Original

File	Position	Carbon Width	Carbon to Carbon Clr.	Clr. to Plated Hole	Clr. to Outline	Layer Area	
		mil	mil	mil	mil	inch ²	%

Peeloff Masks - Original

File	Position	Min. Peelable Width	Peelable to Peelable Clr.	Clr. to Plated Hole	Clr. to Outline	Layer Area	
		mil	mil	mil	mil	inch ²	%

Legend Layers - Original

File	Position	Legend Width	Legend to Legend Clr.	Legend to Cu Defined Pad Clr.	Legend to SM Defined Pad Clr.		Layer Area	
				Comp/SMD/BGA	Comp/SMD/BGA	Via		
		mil	mil	mil	mil	mil	inch ²	%
abfernhorns-F_Silkscreen_gbr	top	4.72	2.45	3.54	>10.00	>10.00	0.0566	4

Gold Layers - Original

File	Position	Gold to Gold Clr.	Clr. to Outline	Layer Area	
		mil	mil	inch ²	%

Heatsink Layers - Original

File	Position	Heatsink to Heatsink Clr.	Clr. to Outline	Layer Area	
		mil	mil	inch ²	%

Scoring - Minimum Clearance - Original

File	Pos.	Copper to Score Top	Copper to Score Right	Copper to Score Bottom	Copper to Score Left
		mil	mil	mil	mil
abfernhorns-F_Cu_gbr	1	35.94	31.50	34.58	>64.00
abfernhorns-B_Cu_gbr	2	>64.00	>64.00	>64.00	>64.00

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Scoring - Routing (based on outline analysis) - Original

Side	Lines	Score Lines Clr.	Saved Routing	Remaining Routing
		mil	mil	mil
Horizontal Score Lines				
Top	1	35.94	0.00	
Mid	0			
Bottom	1	34.58	0.00	
Vertical Score Lines				
Left	1	>64.00	0.00	
Mid	0			
Right	1	31.50	0.00	
All Score Lines				
	4	31.50	0.00	4306.10

Bare Board Test - Original

Side	Testable Points (TPs)	Max. TP Density	SMD Pads	Min. SMD Pad	Pitch of Min. SMD Pad	Edge Connector Fingers	Number of Nets
		TP/inch ²		mil	mil		
Top	36	51	27	23.62	74.80	0	
Bottom	9	18	0			0	
Both	45	51	27			0	8

Input Remarks - Original

External import: Empty image generated. 'abfernhorns-NPTH.drl' (at line 1)
Layer does not contain any image data (demoted to 'empty') 'abfernhorns-B_Paste_gbr'
Layer does not contain any image data (demoted to 'empty') 'abfernhorns-B_Silkscreen_gbr'
Layer does not contain any image data (demoted to 'empty') 'abfernhorns-NPTH_drl'
Gerber Job File import: DISCREPANCY: Extra bottom layers mismatch between Gerber Job File and current job stackup.
Gerber Job File import: OMITTED: \$.MaterialStackup[7] not added to layer attributes because corresponding layer could not be found.
Gerber Job File import: OMITTED: \$.MaterialStackup[8] not added to layer attributes because corresponding layer could not be found.

Anomalies - Original

Please check drill layer because conversion resulted in 0 invalid aperture(s) 'abfernhorns-NPTH.drl'
--

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Delivery Times & Quantities - Original

Delivery Times & Quantities			
Delivery Time 1		Quantity 1	
Quantity 2		Quantity 3	
Quantity 4		Quantity 5	
Quantity 6		Quantity 7	
Delivery Time 2		Quantity 1	
Quantity 2		Quantity 3	
Quantity 4		Quantity 5	
Quantity 6		Quantity 7	
Delivery Time 3		Quantity 1	
Quantity 2		Quantity 3	
Quantity 4		Quantity 5	
Quantity 6		Quantity 7	
Requested Ship Date		Ordered Qty	
Release Date		Dock Date	
Unit Value		Total Value	
Tax Amount		Total Value Inc Tax	
Gross Margin		Actual Turn Time	
Production Priority		T-Shirt	
T-Shirt Choice			

Process Parameters - Original

Used units			
Copper Thickness Unit		All Other Units	

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Process Parameters - Original			
Technology			
Board Class		Controlled Impedance	
Controlled Dielectric		Blind / Buried Drills	
Drill Size Tolerance		Conformal Coating	
ROHS compliant		Filled Vias present	
Filled Vias type		Lead Free	
Layer Count		Blank Layer	
Minimum Hole Size		Edge Plating	
ITAR		CU Base Thickness Outer	
CU Base Thickness Inner		Copper in Holes	
Panel Size X		Panel Size Y	
Panel Quantity		Board in Panel Quantity	
Material Type		Special Materials	
Material Thickness Tolerance		PCB Thickness Measured Over	

Process Parameters - Original			
Copper Areas			
Solder Mask		Solder Mask Type	
Legend		Double Mask Coating	
Mask Plug		Lamination	
PCB Finish		UL	
UL and Date Code		Date Code	
Date Code Type			

Process Parameters - Original

Process Parameters - Original

Ucamco Integr8tor v2025.06-250820 Page11

The information on this document is not only based on files in a clearly defined format, but also on freely structured files and inference rules. Ucamco strives to make it as accurate as possible, but it cannot guarantee the result in all situations. This information is used at the sole risk of its user.

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Customer and Job Identification - Original

Customer			
Customer	InstantDFM	Customer Service Alert	
Contact Person		Contact Phone	
Email		Buyer Person	
Buyer Phone		Buyer Email	
Tech Contact		Tech Phone	
Tech Email		24HR Phone	
Bill To Line 1		Bill To Line 2	
Bill To City		Bill To Zip Code	
Bill To State		Bill To Country	
Bill to Contact Name		Bill to Contact Email	
Bill to Contact Phone		Ship To Line 1	
Ship To Line 2		Ship To City	
Ship To Zip Code		Ship To State	
Ship To Country		Ship to Contact Name	
Ship to Contact Email		Ship to Contact Phone	
Shipping Method		Shipping Remarks	
Ship Extras		Account Remarks	
FreightAmount		Taxable	

Customer and Job Identification - Original

Job			
Article Id		Board Id	
Part Number		Revision	
Customer Purchase Order		Old Id	
CRM Notes		Quote#	
Quoted By		Order#	
Order Date		Order Remarks	
Tool#		Previous Tool#	
Sales ID		Sales Rep	
Order Specials		Job Type	
Product Mix		InstantDFM Engineering Review	
NPI Engineering Review		InstantDFM Order Number	
Big Commerce Order Number		Drawing Number	
DFM Line Number		DFM Total Number of Lines	
Discount Code		Made In USA	
InstantDFM Payment Method			

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

For automation only - users should ignore - Original

Automation	
Override job thickness	Override job solder mask color
Override job legend color	

Comments - Original

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

Summary Minimum Design Characteristics - Locations - Original

1

abfernhoms-F_Cu_gbr
⊕ x: 4664.37 mil
y: -3288.88 mil

**Copper Width
Outer Layers
9.84 mil**

2

abfernhoms-F_Cu_gbr
⊕ x: 4664.37 mil
y: -3288.88 mil

**Critical Copper Width
Outer Layers
9.84 mil**

3

abfernhoms-F_Cu_gbr
⊕ x: 4664.37 mil
y: -3288.88 mil

**Trace Width
Outer Layers
9.84 mil**

4

abfernhoms-F_Cu_gbr
⊕ x: 4664.37 mil
y: -3288.88 mil

**Critical Trace Width
Outer Layers
9.84 mil**

5

abfernhoms-F_Cu_gbr
⊕ x: 4532.7 mil
y: -3429.61 mil

**Copper to Copper Clr.
Outer Layers
10.01 mil**

6

abfernhoms-F_Cu_gbr
⊕ x: 4052.16 mil
y: -3749.51 mil

**Same Net Clr.
Outer Layers
8.86 mil**

Name	auer3f5q.zip	Id.	29887 - QED OK
Report Generated on	Sep 24, 2026, 10:23:13 PM	Customer	InstantDFM

