


The sensitivity adjustment capacitors (Cs) is optional and must be X7R or NPO. The range of Cs value is 050pF.



| Title | | |
|-------|--|----------|
| Size | Number | Revision |
| A3 | | |
| Date: | 8-20-2022 | Sheet of |
| File: | C:\Users\HAQuDA_upper_PCB_sch\HAQuDA_upper_PCB_sch.dsn | 1 of 1 |

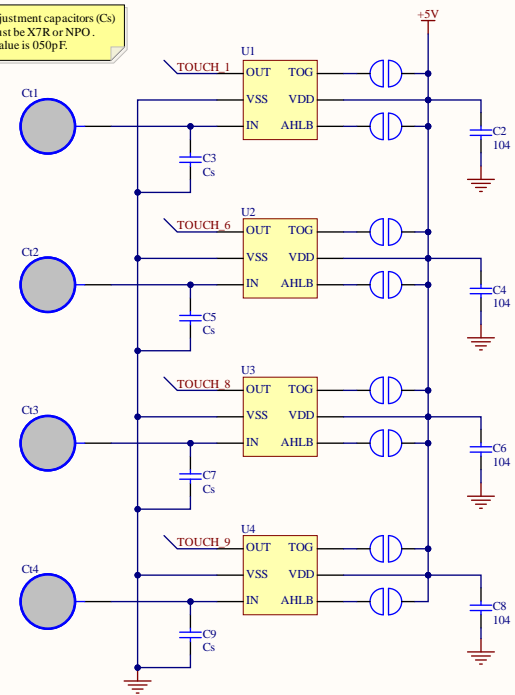