


The sensitivity adjustment capacitors (Cs) is optional and must be X7R or NPO. The range of Cs value is 050pF.



| | | |
|---|----------|----------|
| Title | | |
| Size A3 | Number | Revision |
| Date: 8-28-2022 | Sheet of | |
| File: C:\Users\HAQuDA_upper_PCB_sch\HAQuDA_upper_PCB_sch.dwg | | |

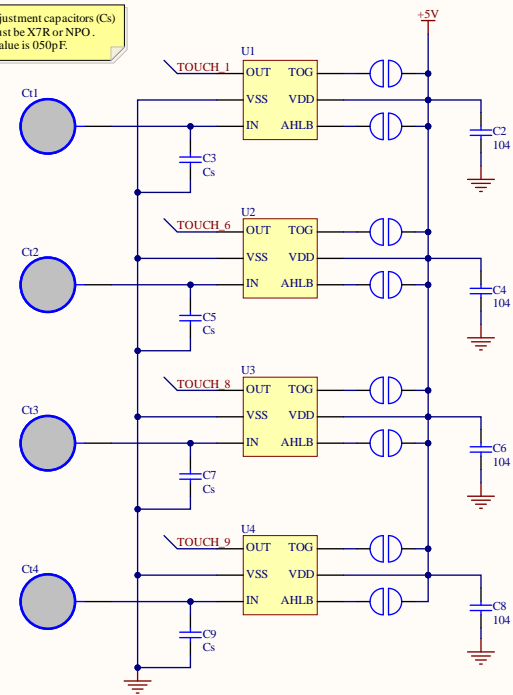