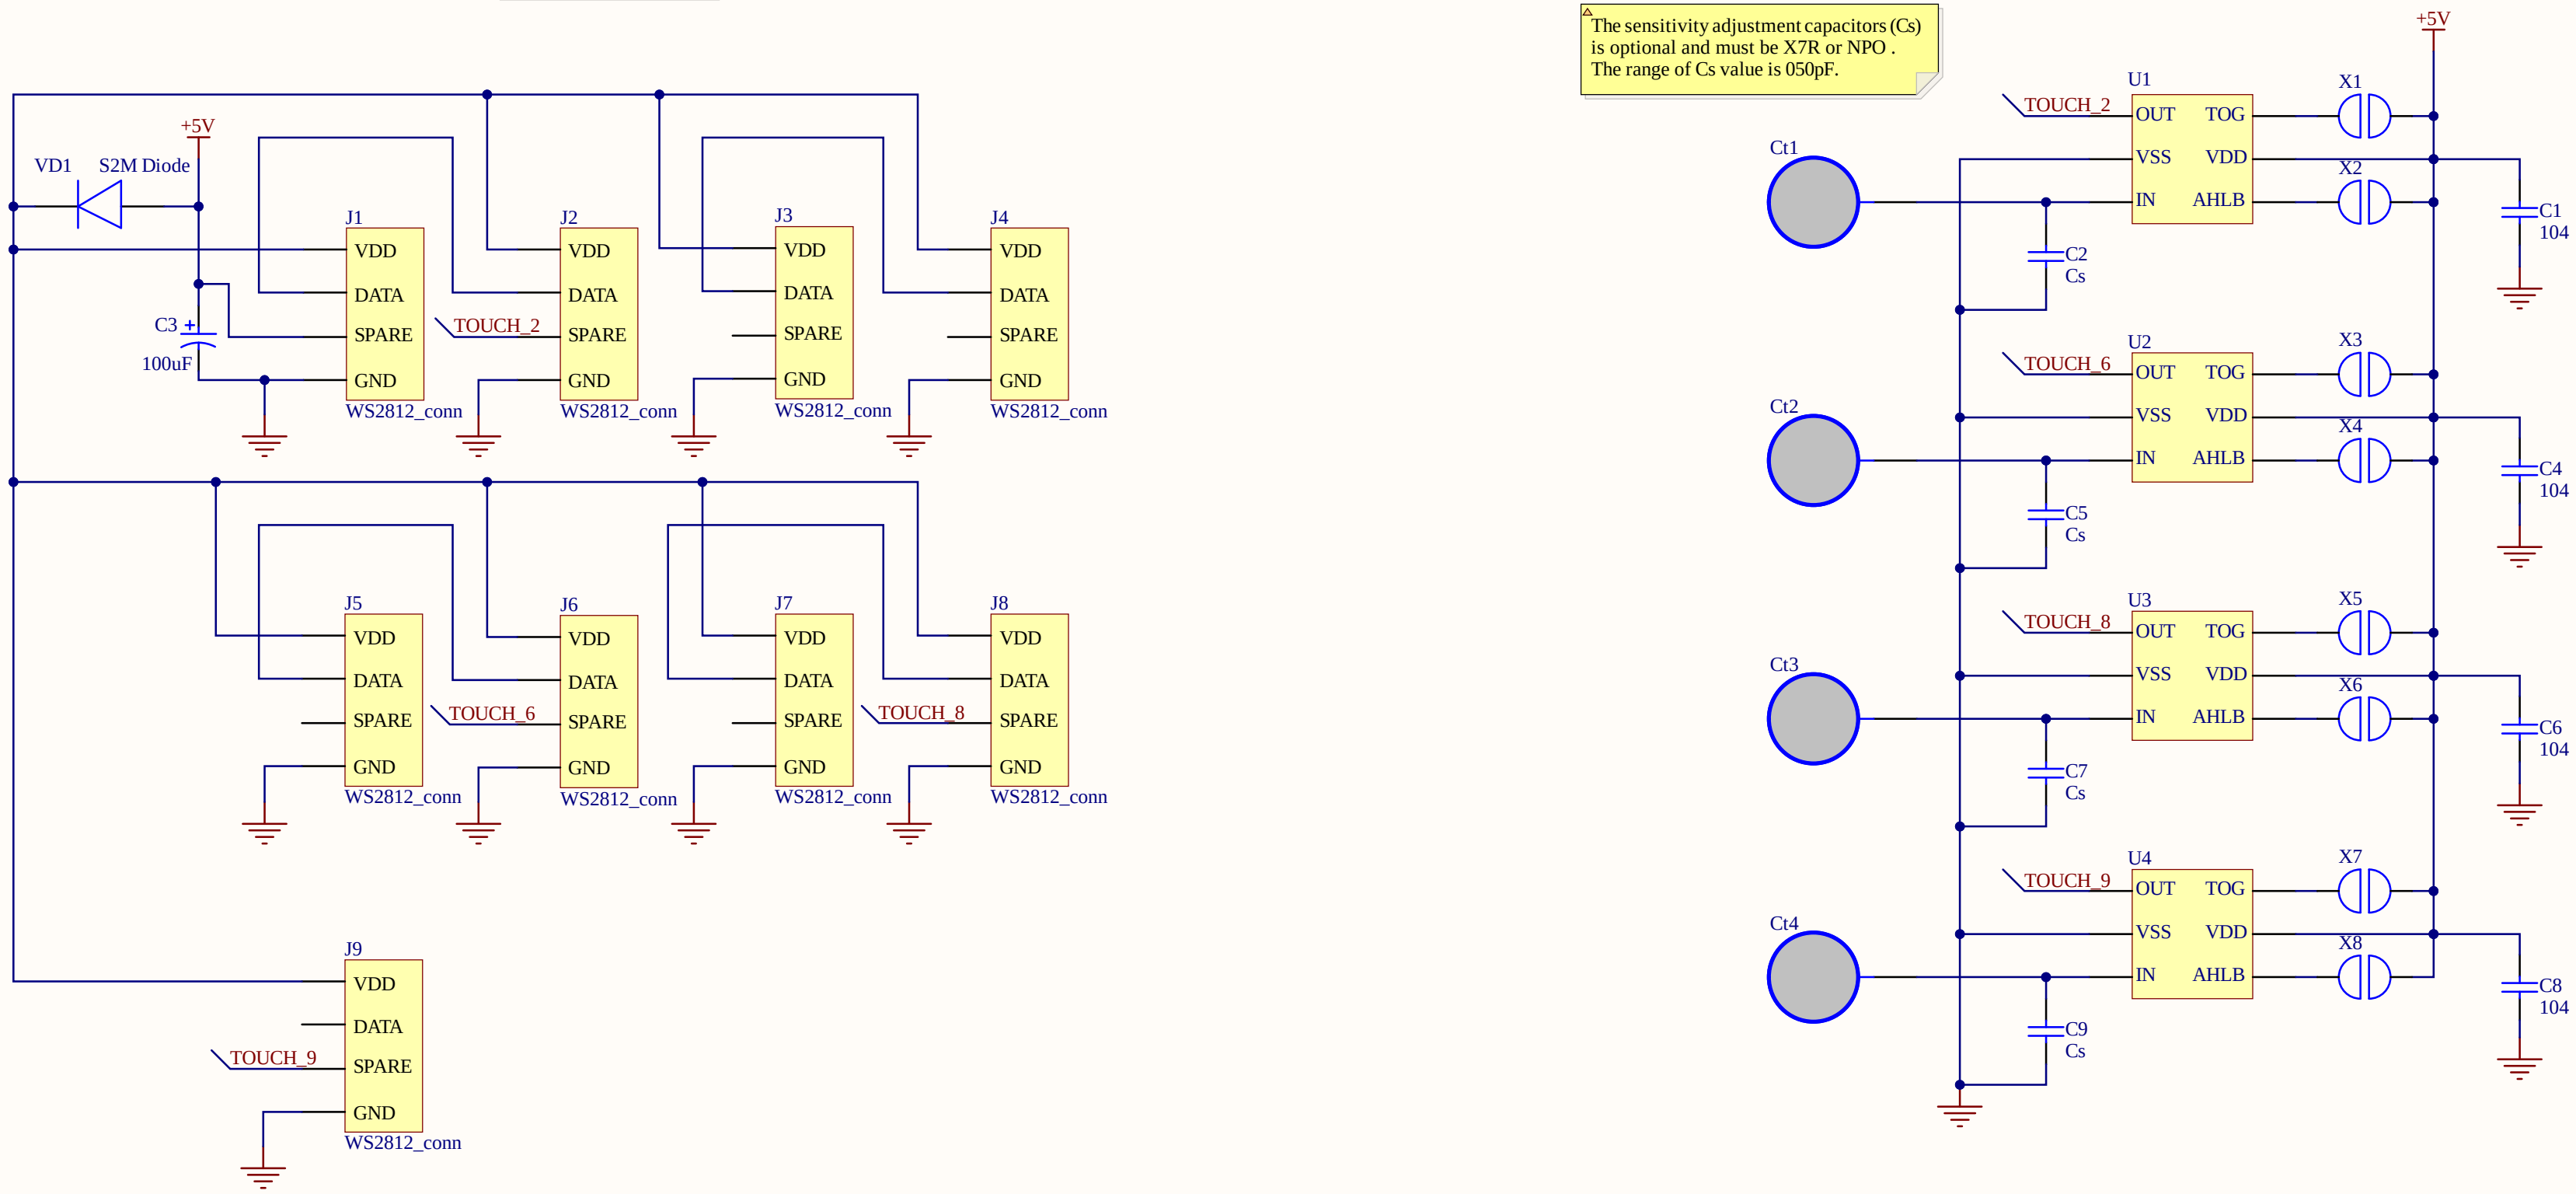
VD1
S2M Diode
+5V
C3
100uF
J1
J2
J3
J4
J5
J6
J7
J8
J9
VDD
DATA
SPARE
GND
WS2812_conn
TOUCH_2
TOUCH_6
TOUCH_8
TOUCH_9
Ct1
Ct2
Ct3
Ct4
U1
U2
U3
U4
OUT
VSS
IN
TOG
VDD
AHLB
X1
X2
X3
X4
X5
X6
X7
X8
C1
C4
C6
C8
104
C2
C5
C7
C9
Cs

VDD for WS2812 is equal to 4.4V, diode on 5V line

The sensitivity adjustment capacitors (Cs) is optional and must be X7R or NPO . The range of Cs value is 050pF.

Title

Size A3

Number

Revision

Date: 11-07-2026

Sheet of

File: C:\Users\..\HAQuDA_upper_PCB_schematic_ver_2.SchDoc

Drawn By:

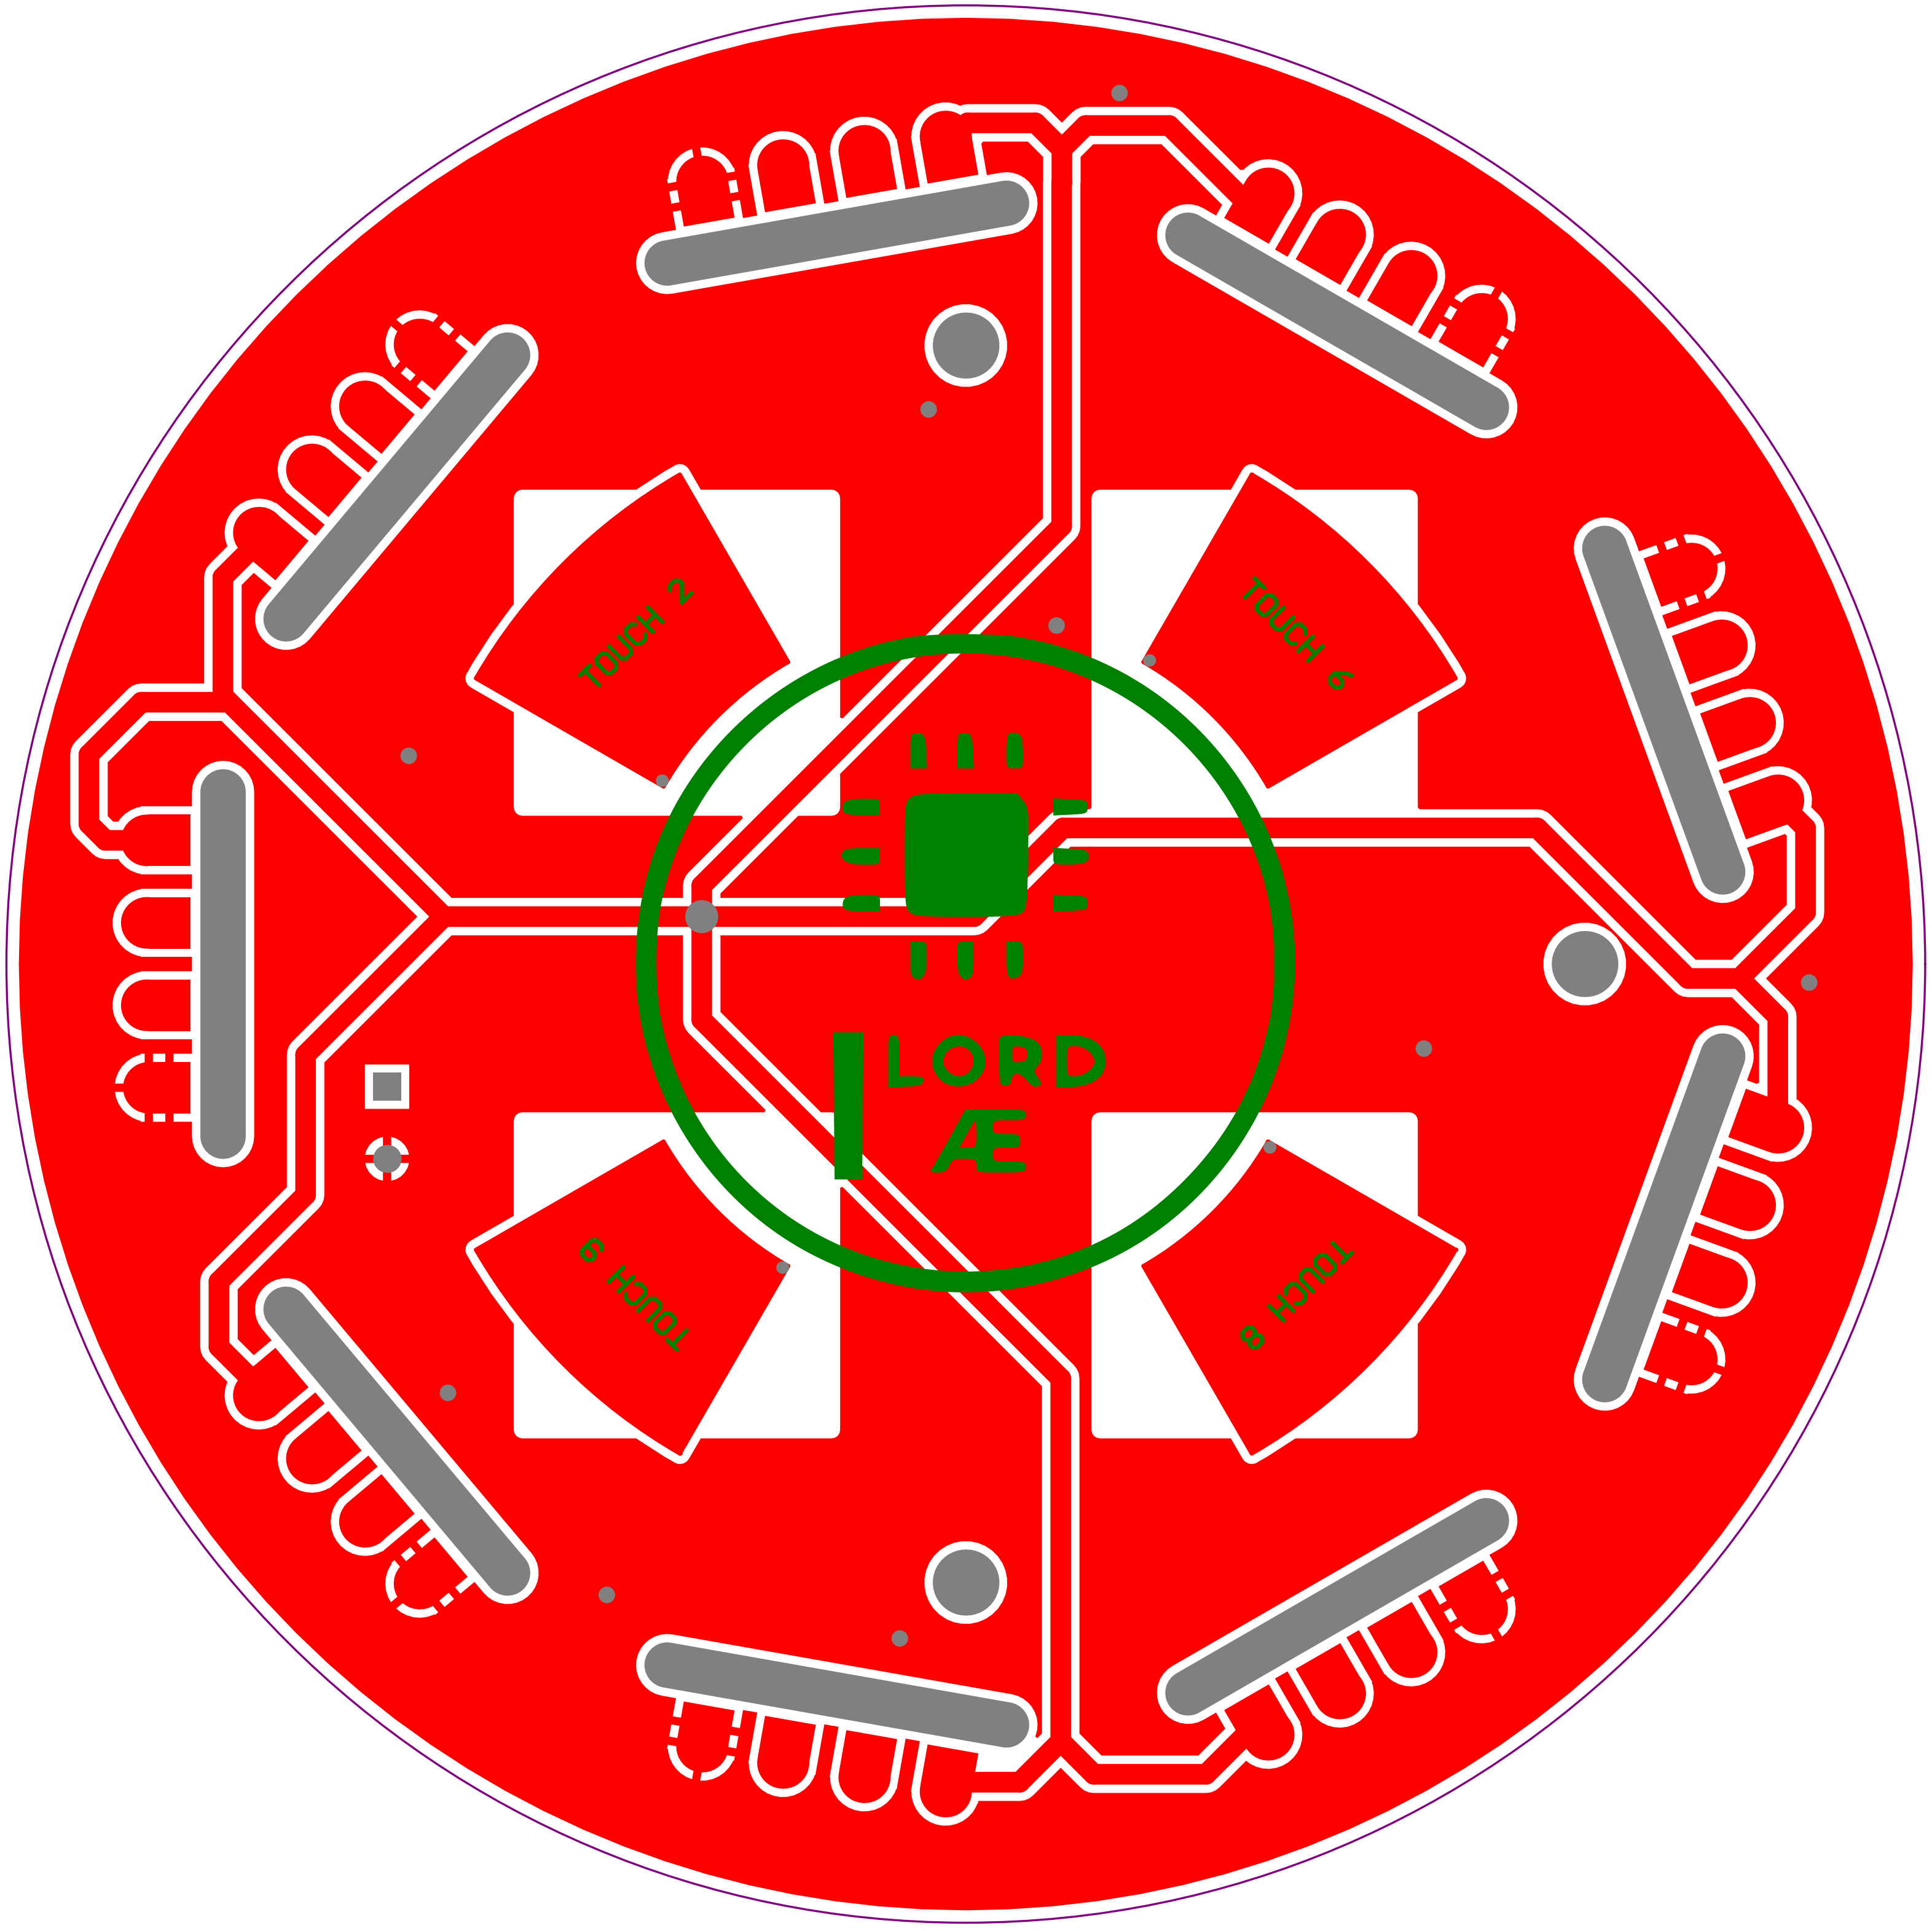
TOUCH 2
TOUCH 6
LORD
Æ
TOUCH 9
TOUCH 8

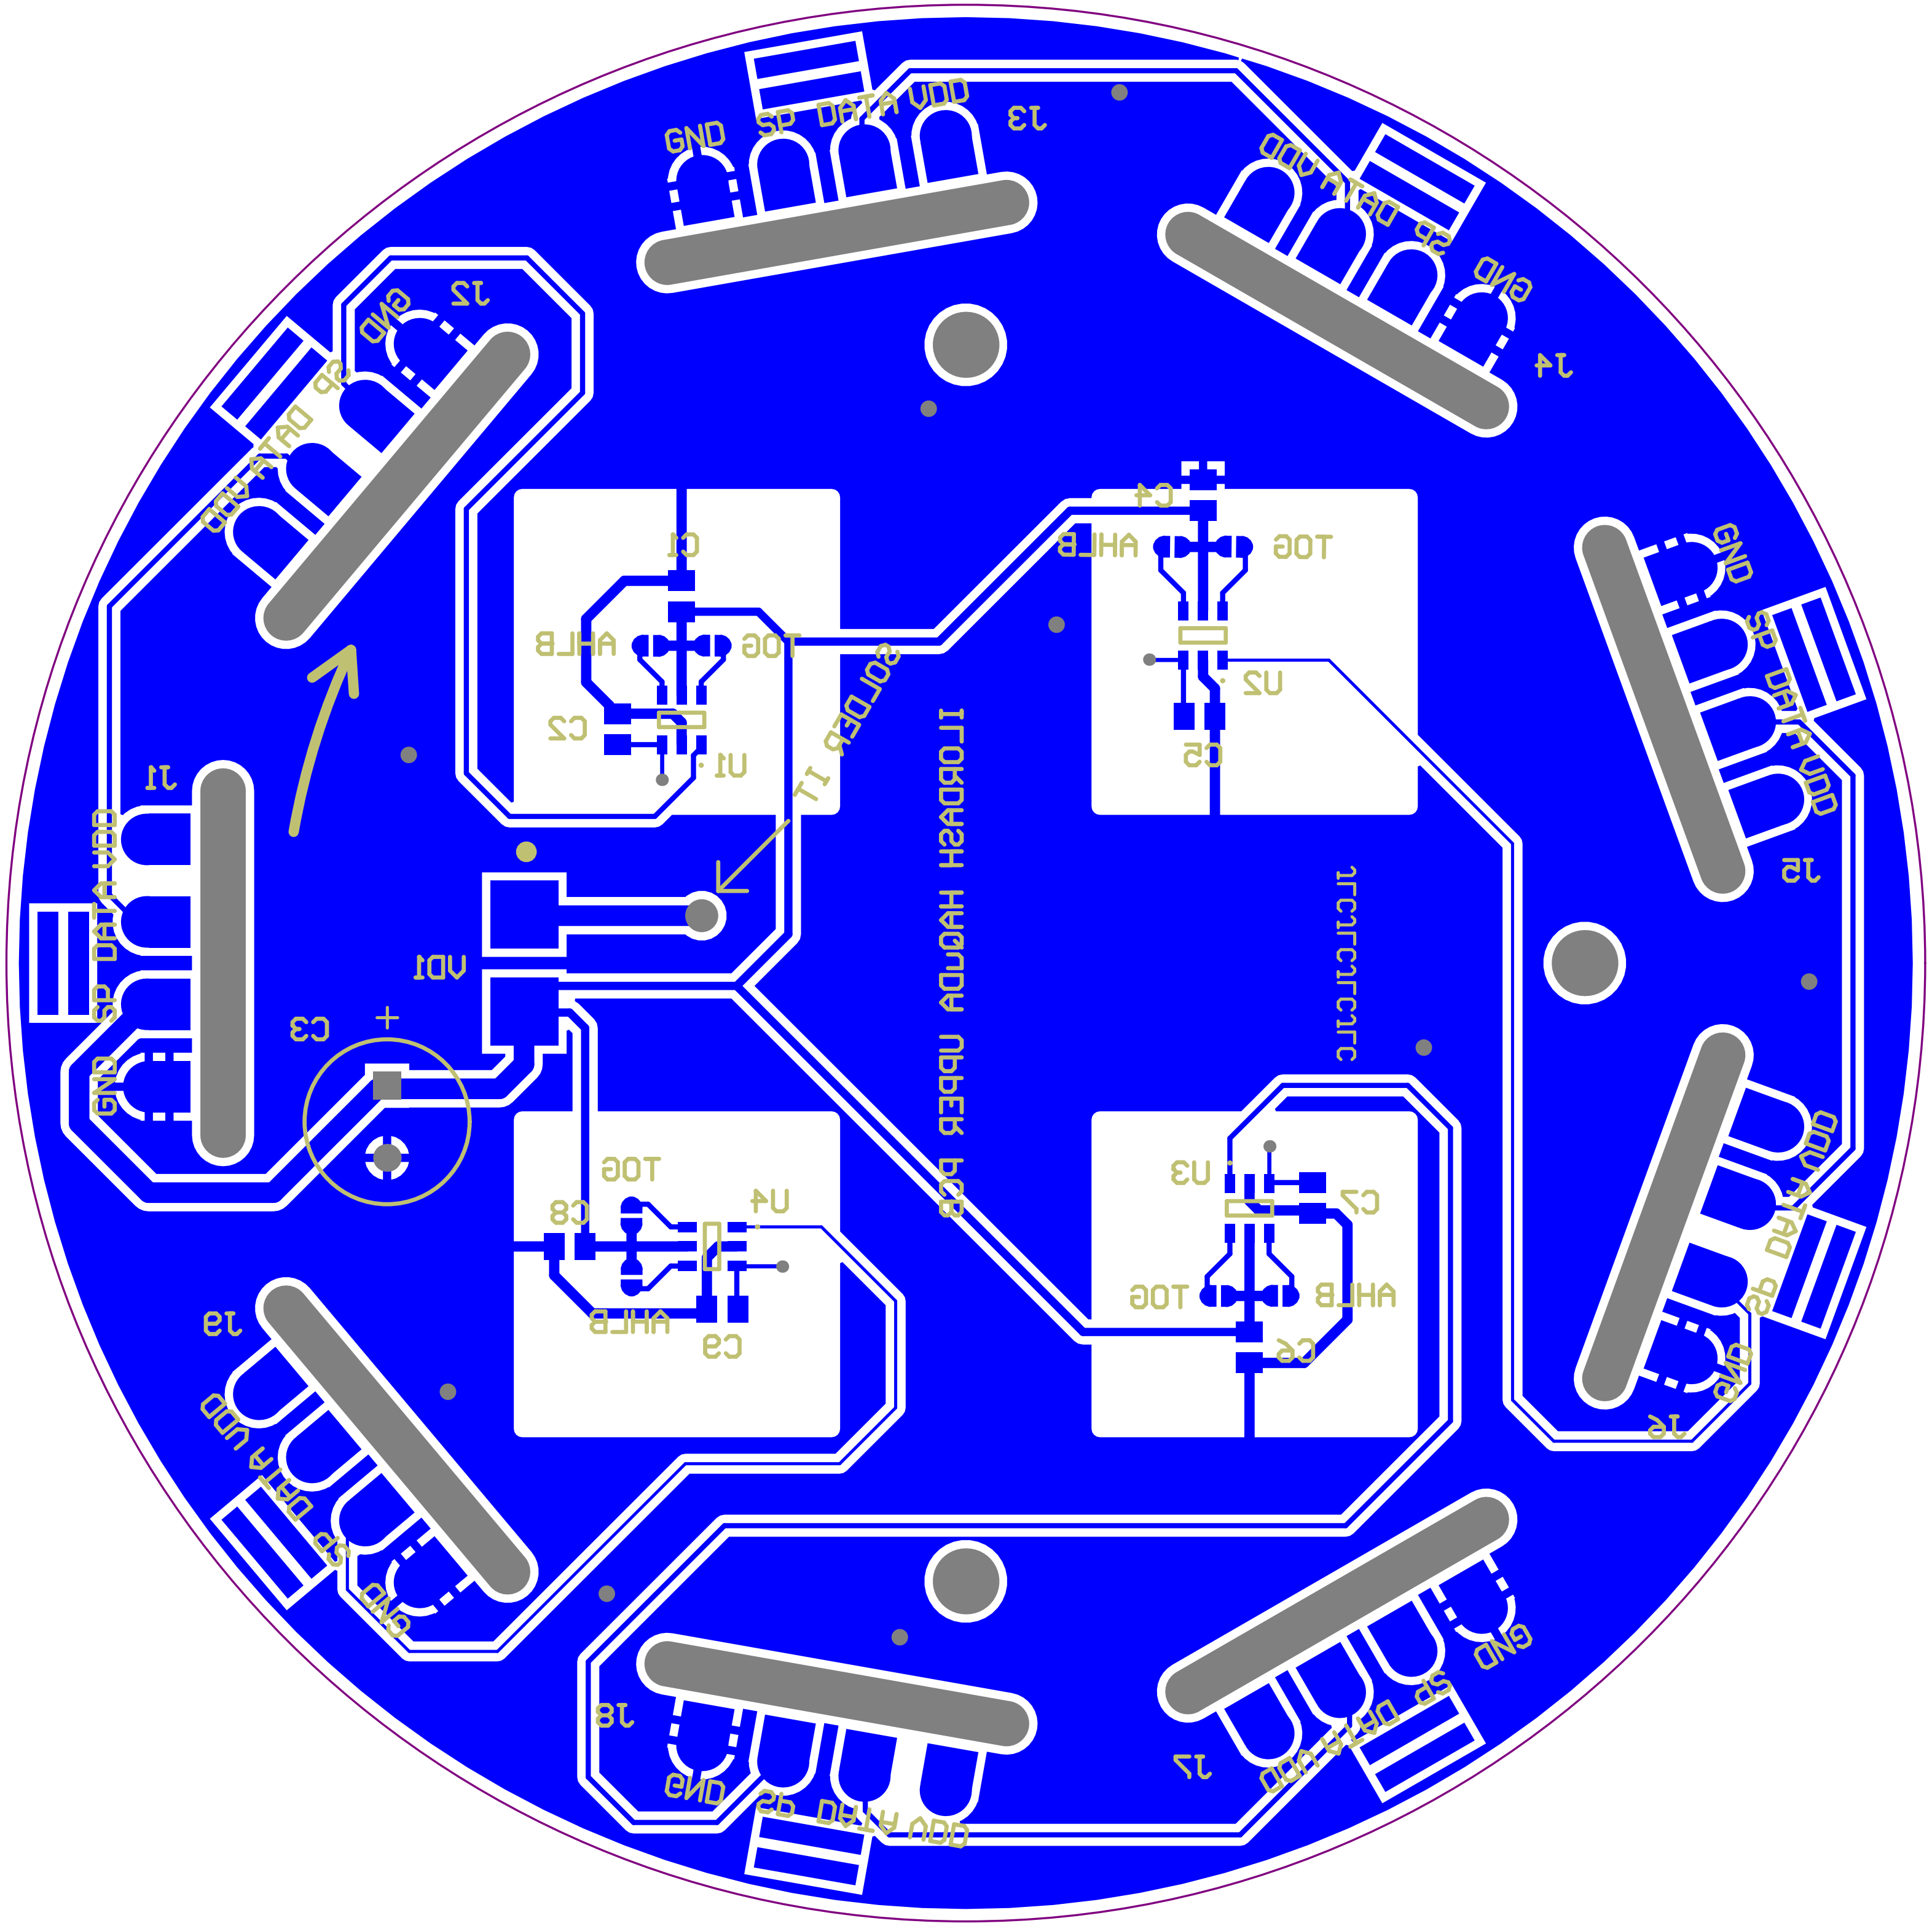
GND
SP
DATA
VDD
J1
J2
J3
J4
J5
J6
J7
J8
J9
C1
C2
C3
C4
C5
C6
C7
C8
C9
U1
U2
U3
U4
VD1
SOLDER J1
+