

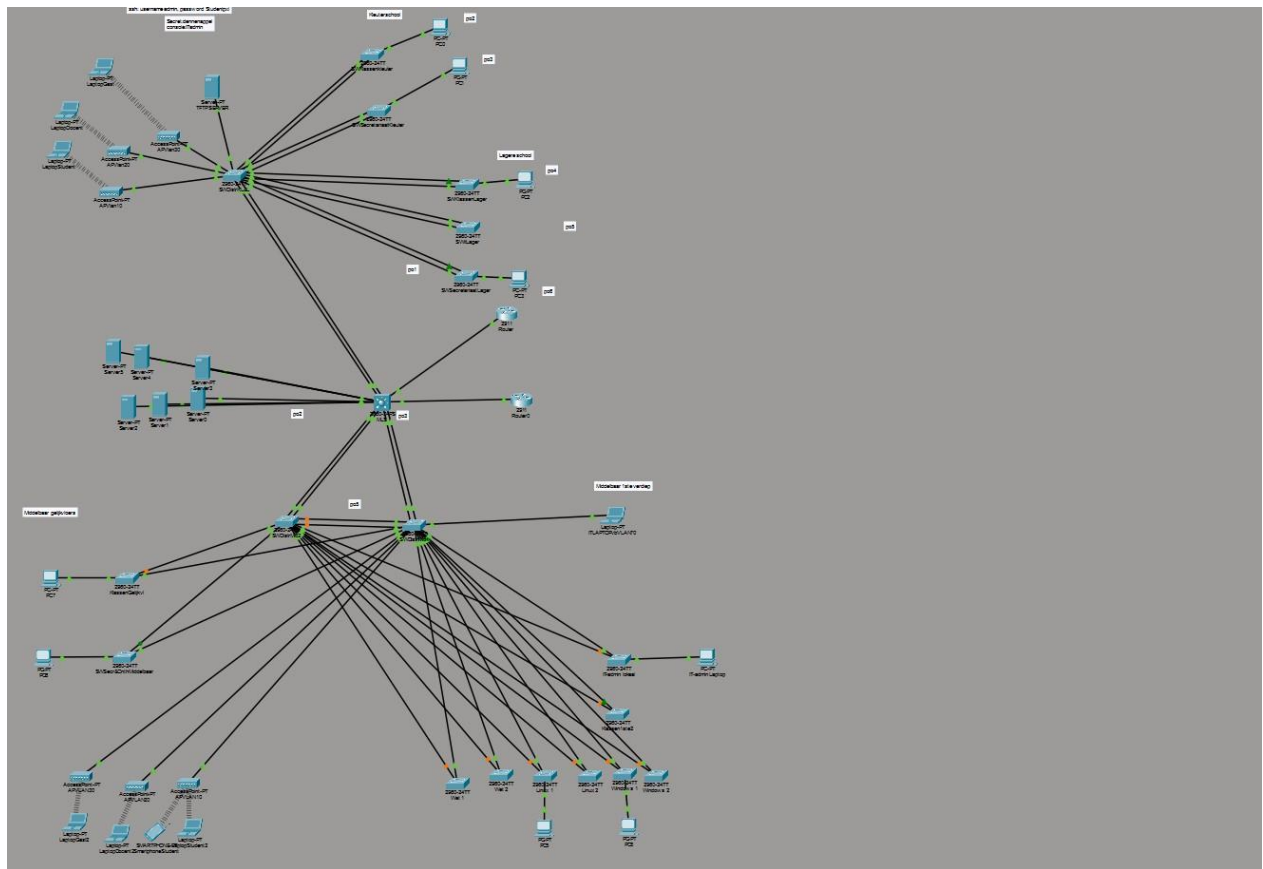


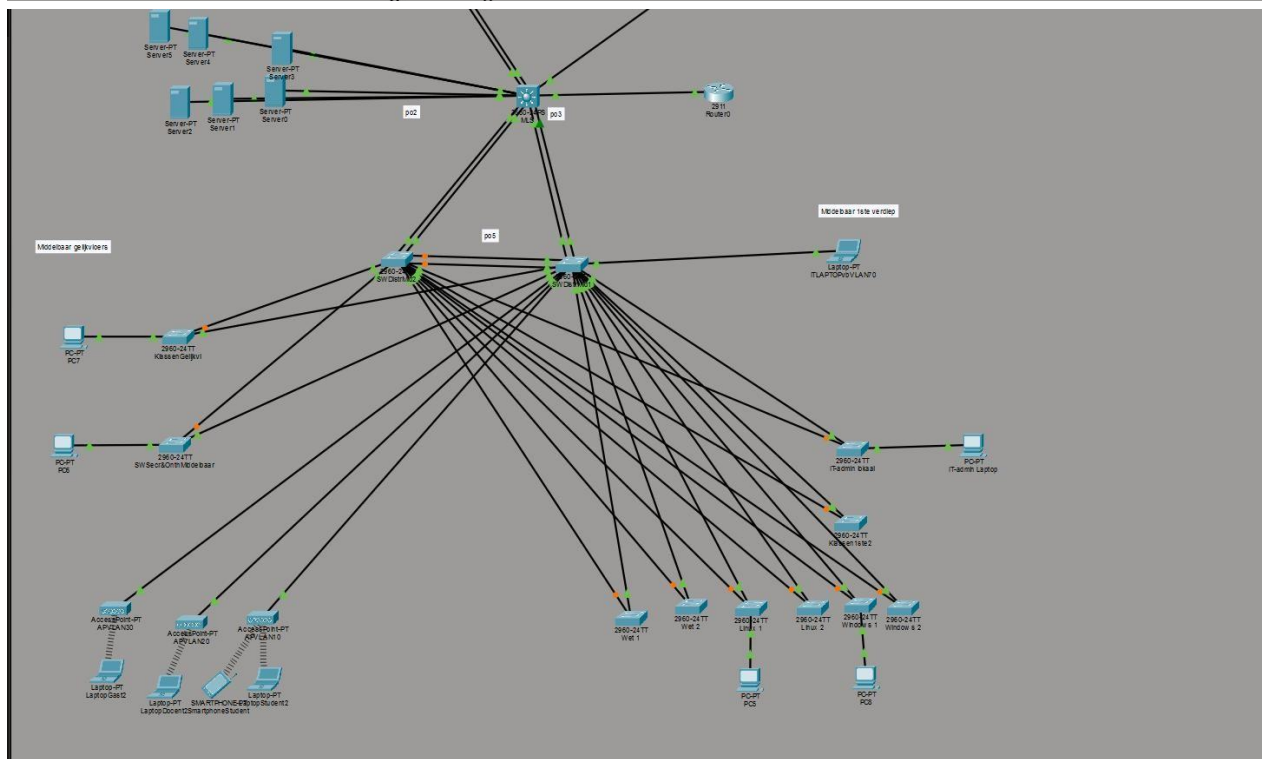

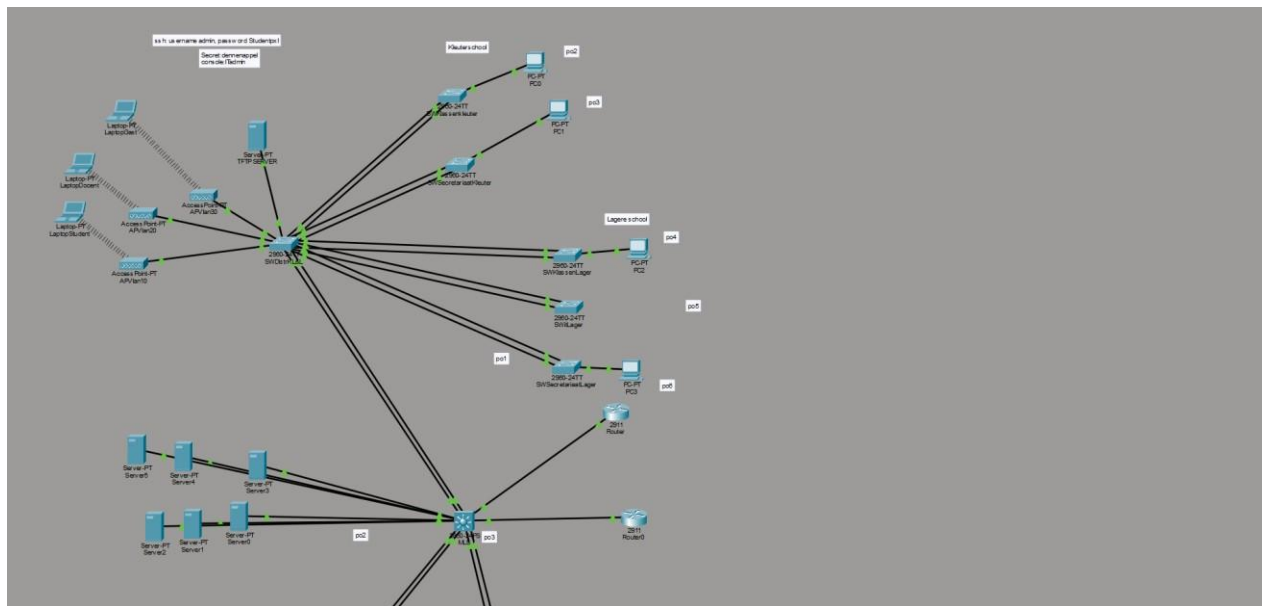

Hieronder staan alle configuraties van de hoofdswitches. Deze switches verzorgen de doorverbindingen (uplinks) naar de switches die in de klaslokalen hangen.

SWDistrKL&L# show run

Building configuration...

Current configuration : 5253
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname SWDistrKL&L

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip

domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z

uxQ0

!

!

ip dhcp snooping vlan

10,20,25,30,40,50,60,70,80,9

9 no ip dhcp

snooping

information option

!

spanning-tree mode pvst

spanning-tree portfast

bpdu guard default spanning-
tree extend systemid

!

interface Port-channel1

switchport trunk native vlan

999

```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9 switchport mode
```

```
trunk switchport  
nonegotiate
```

```
!
```

```
interface Port-channel2  
description Uplink KleuterKlas  
switchport trunk native vlan  
999  
10,20,25,30,40,50,60,70,80,9
```



```
switchport trunk allowed vlan  
9,999 switchport mode  
trunk
```

!

```
interface Port-channel3  
description Uplink  
SecretariaatKleueter switchport  
trunk native vlan  
999  
10,20,25,30,40,50,60,70,80,9
```

```
switchport trunk allowed vlan  
9,999 switchport mode  
trunk
```

!

```
interface Port-channel4  
description Uplink LagerKlas  
switchport trunk native vlan  
999  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode  
trunk
```

switchport trunk allowed vlan

!

interface Port-channel5

description Uplink

ITKlassenLager

switchport trunk native vlan

999

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode

trunk

!

```
switchport trunk allowed vlan
interface Port-channel6
description Uplink
SecretariaatLager switchport
trunk native vlan
999
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode
trunk
!
```

switchport trunk allowed vlan

interface FastEthernet0/1

switchport access vlan 99

switchport mode access

!

interface FastEthernet0/2

!

```
interface FastEthernet0/3
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 2 mode active
!
```

```
interface FastEthernet0/4
switchport trunk native vlan
```

999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 2 mode active
!

interface FastEthernet0/5

switchport trunk native vlan

999

10,20,25,30,40,50,60,70,80,9

```
switchport trunk allowed vlan  
9,999 switchport mode trunk  
channel-group 3 mode active
```

```
!
```

```
interface FastEthernet0/6  
switchport trunk native vlan
```



```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode trunk  
channel-group 3 mode active  
!
```

999

```
switchport trunk allowed vlan
interface FastEthernet0/7
switchport trunk native vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 4 mode active
!
```

```
999
```

```
switchport trunk allowed vlan
interface FastEthernet0/8
switchport trunk native vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 4 mode active
!
```

```
999
```

```
switchport trunk allowed vlan
interface FastEthernet0/9
switchport trunk native vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 5 mode active
!
```

```
999
```

```
switchport trunk allowed vlan
interface FastEthernet0/10
switchport trunk native vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 5 mode active
!
```

```
999
```

```
switchport trunk allowed vlan
interface FastEthernet0/11
switchport trunk native vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 6 mode active
!
```

```
999
```

```
switchport trunk allowed vlan  
interface FastEthernet0/12  
switchport trunk native vlan
```

999

```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode trunk  
channel-group 6 mode active  
!
```

```
interface FastEthernet0/13  
switchport access vlan 10  
switchport mode access  
switchport nonegotiate  
switchport port-security
```


macaddress sticky spanning-
tree portfast

!

interface FastEthernet0/14
switchport access vlan 20
switchport mode access
switchport nonegotiate
switchport port-security
macaddress sticky spanning-
tree portfast

!

```
interface FastEthernet0/15
switchport access vlan 30
switchport mode access
switchport nonegotiate
switchport port-security
macaddress sticky spanning-
tree portfast
```

!

```
interface FastEthernet0/16
```

!

```
interface FastEthernet0/17
```

!

interface FastEthernet0/18

!

interface FastEthernet0/19

!

interface FastEthernet0/20

!

interface FastEthernet0/21

!

interface FastEthernet0/22 !

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode

trunk shutdown

!

```
interface GigabitEthernet0/1
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9 ip arp inspection trust
ip dhcp snooping trust
switchport mode trunk
switchport nonegotiate
```

channel-group 1 mode

active spanning-tree

guard root

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk switchport

nonegotiate channel-

group 1 mode active

spanning-tree guard

root

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99

ip address 10.2.99.11

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

SWDistrKL&L#

MLS#show run

Building configuration...

Current configuration : 10743
bytes

!

version 16.3.2 no service
timestamps log datetime msec
no service timestamps debug

datetime msec no service

passwordencryption

!

hostname MLS

!

!

no profinet

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

ip dhcp relay information
trust-all

!

!

ip dhcp excluded-address
10.2.8.1 10.2.8.29

ip dhcp excluded-address
10.2.20.1 10.2.20.29 ip
dhcp excluded-address
10.2.25.1 10.2.25.29 ip
dhcp excluded-address

10.2.30.1 10.2.30.29 ip

dhcp excluded-address

10.2.40.1 10.2.40.29 ip

dhcp excluded-address

10.2.50.1 10.2.50.29 ip

dhcp excluded-address

10.2.60.1 10.2.60.29

ip dhcp excluded-address

10.2.99.1 10.2.99.234 ip

dhcp excluded-address

10.2.70.1 10.2.70.250

ip dhcp excluded-address

10.2.80.1 10.2.80.10

!

ip dhcp pool VLAN10 network

10.2.8.0 255.255.248.0

default-router 10.2.8.254 dns-
server 8.8.8.8 ip dhcp pool

VLAN20 network 10.2.20.0

255.255.255.0 default-router

10.2.20.254 dns-server 8.8.8.8

ip dhcp pool VLAN25 network

10.2.25.0 255.255.255.0

default-router 10.2.25.254

dns-server 8.8.8.8

ip dhcp pool VLAN30

network 10.2.30.0

255.255.255.0 default-

router 10.2.30.254 dns-

server 8.8.8.8 ip dhcp pool

VLAN40 network 10.2.40.0

255.255.255.0 default-

router 10.2.40.254 dns-

server 8.8.8.8 ip dhcp pool

VLAN50 network 10.2.50.0

255.255.255.0 default-
router 10.2.50.254 dns-
server 8.8.8.8 ip dhcp pool
VLAN60 network 10.2.60.0
255.255.255.0 default-
router 10.2.60.254 dns-
server 8.8.8.8 ip dhcp pool
VLAN70 network 10.2.70.0
255.255.255.0 default-
router 10.2.70.254 dns-
server 8.8.8.8 ip dhcp pool
VLAN80 network 10.2.80.0

255.255.255.0 default-
router 10.2.80.254 dns-
server 8.8.8.8 ip dhcp pool
VLAN99 network 10.2.99.0
255.255.255.0 default-
router 10.2.99.254 dns-
server 8.8.8.8

!

!

!

no ip cef ip

routing

!

no ipv6 cef

!

!

!

username admin privilege 15

secret 5

\$1\$mERr\$teH.a5ZJRInj8IW12z

uxQ0

!

!

!

!

!

!

!

!

!

ip dhcp snooping vlan

10,20,25,30,40,50,60,70,80,9

!

9 no ip dhcp

snooping

information option ip

ssh version 2 ip

domain-name

Dennenappel.local

!

!

spanning-tree mode pvst

spanning-tree portfast

!

bpduguard default spanning-
tree vlan 1-4094 priority 24576

!

!

!

!

!

!

interface Port-channel1

description Uplink

SWDistrKL&L

switchport trunk native vlan

switchport trunk allowed vlan
999

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode

trunk

!

interface Port-channel2

description Uplink

Distr2Middelbaar

switchport trunk native vlan

999

10,20,25,30,40,50,60,70,80,9

```
switchport trunk allowed vlan  
9,999 switchport mode  
trunk
```

```
!
```

```
interface Port-channel3  
description Uplink  
Distr1Middelbaar
```

```
switchport trunk native vlan  
999
```

```
10,20,25,30,40,50,60,70,80,9
```

```
9,999 switchport mode trunk
```

```
ipv6 traffic-filter VLAN40-IN in
```

switchport trunk allowed vlan
!

interface

GigabitEthernet1/0/1

no switchport ip

address 10.2.0.1

255.255.255.0

duplex auto speed

auto

!

interface

GigabitEthernet1/0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode

trunk channel-group 1

mode active

!

interface

GigabitEthernet1/0/3

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

switchport mode trunk

channel-group 1 mode active !

interface

GigabitEthernet1/0/4

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode trunk
channel-group 2 mode active
!

interface

GigabitEthernet1/0/5

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode trunk

channel-group 2 mode active

!

interface

GigabitEthernet1/0/6

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode trunk

channel-group 3 mode active

!

interface

GigabitEthernet1/0/7

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode trunk

channel-group 3 mode active

!

```
GigabitEthernet1/0/8 ip  
dhcp snooping trust  
switchport access vlan 80  
switchport mode access ip  
arp inspection trust  
!
```

```
interface
```

```
GigabitEthernet1/0/9 ip  
dhcp snooping trust  
switchport access vlan 80
```

interface

switchport mode access ip

arp inspection trust

!

interface

GigabitEthernet1/0/10 ip

dhcp snooping trust

switchport access vlan 80

switchport mode access ip

arp inspection trust

!

```
GigabitEthernet1/0/11 ip  
dhcp snooping trust  
switchport access vlan 80  
switchport mode access ip  
arp inspection trust  
!
```

```
interface
```

```
GigabitEthernet1/0/12 ip  
dhcp snooping trust  
switchport access vlan 80
```

interface

switchport mode access ip

arp inspection trust

!

interface

GigabitEthernet1/0/13 ip

dhcp snooping trust

switchport access vlan 80

switchport mode access ip

arp inspection trust

!

GigabitEthernet1/0/14

shutdown

!

interface

GigabitEthernet1/0/15

shutdown

!

interface

GigabitEthernet1/0/16

shutdown

interface

!

interface

GigabitEthernet1/0/17

shutdown

!

interface

GigabitEthernet1/0/18

shutdown

!

interface

GigabitEthernet1/0/19

shutdown

!

interface

GigabitEthernet1/0/20

shutdown

!

interface

GigabitEthernet1/0/21

shutdown

!

interface

GigabitEthernet1/0/22

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9 switchport mode

trunk

!

interface

GigabitEthernet1/0/23

description Link_to_Routers

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9 switchport mode trunk

spanning-tree portfast trunk

!

interface

GigabitEthernet1/0/24

description Link_to_Routers

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9 switchport mode trunk

spanning-tree portfast trunk

!

interface

GigabitEthernet1/1/1

shutdown

!

```
interface GigabitEthernet1/1/2  
shutdown
```

!

```
interface GigabitEthernet1/1/3  
shutdown
```

!

```
interface GigabitEthernet1/1/4  
shutdown
```

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan10 mac-address

0001.97d0.5001

ip address 10.2.8.2

255.255.248.0 standby

version 2 standby 10 ip

10.2.8.254

!

```
interface Vlan20 mac-address  
0001.97d0.5002 ip address  
10.2.20.2 255.255.255.0  
standby version 2 standby 20 ip  
10.2.20.254
```

!

```
interface Vlan25 address  
0001.97d0.5003  
  
ip address 10.2.25.2  
255.255.255.0 standby
```

mac-

version 2 standby 25 ip

10.2.25.254

!

interface Vlan30 mac-address

0001.97d0.5004 ip address

10.2.30.2 255.255.255.0

standby version 2 standby 30 ip

10.2.30.254 interface Vlan40

mac-address 0001.97d0.5005

ip address 10.2.40.2

!

255.255.255.0 standby version
2 standby 40 ip 10.2.40.254

!

interface Vlan50 address
0001.97d0.5006

ip address 10.2.50.2
255.255.255.0 standby
version 2 standby 50 ip
10.2.50.254

!

mac-

```
interface Vlan60 mac-address  
0001.97d0.5007 ip address  
10.2.60.2 255.255.255.0  
standby version 2 standby 60 ip  
10.2.60.254 interface Vlan70  
mac-address 0001.97d0.5008  
ip address 10.2.70.2  
255.255.255.0 standby version  
2 standby 70 ip 10.2.70.254  
!
```

!

interface Vlan80 address

0001.97d0.5009

ip address 10.2.80.2

255.255.255.0 standby

version 2 standby 80 ip

10.2.80.254

!

interface Vlan99 mac-address

0001.97d0.500a ip address

10.2.99.2 255.255.255.0

mac-

standby version 2 standby 99 ip
10.2.99.254

!

ip classless

ip route 0.0.0.0 0.0.0.0
10.2.0.2

!

ip flow-export version 9

!

!

ip access-list extended
VLAN10-IN

deny ip 10.2.8.0 0.0.7.255
10.2.20.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.25.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.30.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.70.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.99.0 0.0.0.255 permit

ip any any

deny ip 10.2.8.0 0.0.7.255

10.2.40.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.50.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.60.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.80.0 0.0.0.255

ip access-list extended

VLAN20-IN deny ip

10.2.20.0 0.0.0.255

10.2.30.0 0.0.0.255

deny ip 10.2.20.0 0.0.0.255

10.2.70.0 0.0.0.255 deny ip

10.2.20.0 0.0.0.255


```
10.2.99.0 0.0.0.255 permit  
ip any any
```

```
permit ip 10.2.20.0 0.0.0.255  
10.2.80.0 0.0.0.255 deny ip  
10.2.20.0 0.0.0.255 10.2.10.0  
0.0.0.255
```

```
ip access-list extended  
VLAN25-IN
```

```
deny ip 10.2.25.0 0.0.0.255  
10.2.30.0 0.0.0.255 deny ip  
10.2.25.0 0.0.0.255
```

10.2.70.0 0.0.0.255 deny ip

10.2.25.0 0.0.0.255

10.2.99.0 0.0.0.255 permit

ip any any

permit ip 10.2.25.0 0.0.0.255

10.2.80.0 0.0.0.255 deny ip

10.2.25.0 0.0.0.255

10.2.10.0 0.0.0.255

ip access-list extended VLAN30-
IN

deny ip 10.2.30.0 0.0.0.255

10.0.0.0 0.255.255.255

```
permit ip any any ip access-  
list extended VLAN40-IN
```

```
permit udp any any eq bootps
```

```
permit udp any any eq bootpc
```

```
deny ip 10.2.40.0 0.0.0.255
```

```
10.2.20.0 0.0.0.255
```

```
deny ip 10.2.40.0 0.0.0.255
```

```
10.2.25.0 0.0.0.255 deny ip
```

```
10.2.40.0 0.0.0.255
```

```
10.2.30.0 0.0.0.255 deny ip
```

```
10.2.40.0 0.0.0.255
```

10.2.70.0 0.0.0.255 deny ip

10.2.40.0 0.0.0.255

10.2.99.0 0.0.0.255 permit

ip any any ip access-list

extended

VLAN50-IN

deny ip 10.2.50.0 0.0.0.255

10.2.20.0 0.0.0.255 deny ip

10.2.50.0 0.0.0.255

10.2.25.0 0.0.0.255 deny ip

10.2.50.0 0.0.0.255

10.2.30.0 0.0.0.255 deny ip

10.2.50.0 0.0.0.255

10.2.70.0 0.0.0.255 deny ip

10.2.50.0 0.0.0.255

10.2.99.0 0.0.0.255 permit

ip any any

ip access-list extended VLAN60-
IN

deny ip 10.2.60.0 0.0.0.255

10.2.20.0 0.0.0.255 deny ip

10.2.60.0 0.0.0.255

10.2.25.0 0.0.0.255 deny ip

10.2.60.0 0.0.0.255

10.2.30.0 0.0.0.255 deny ip

10.2.60.0 0.0.0.255

10.2.70.0 0.0.0.255 deny ip

10.2.60.0 0.0.0.255

10.2.99.0 0.0.0.255

permit ip any any ip access-
list extended VLAN80-IN

deny ip 10.2.80.0 0.0.0.255

10.2.8.0 0.0.7.255 deny ip

10.2.80.0 0.0.0.255

10.2.30.0 0.0.0.255 permit

ip any any

```
permit ip 10.2.80.0 0.0.0.255  
10.2.20.0 0.0.0.255
```

```
permit ip 10.2.80.0 0.0.0.255  
10.2.25.0 0.0.0.255 permit ip  
10.2.80.0 0.0.0.255 10.2.70.0  
0.0.0.255 deny ip 10.2.80.0  
0.0.0.255 10.0.0.0
```

```
0.255.255.255 ip access-list  
extended VLAN99-IN permit  
udp any any eq bootps permit  
udp any any eq bootpc deny ip  
10.2.99.0 0.0.0.255 10.2.8.0
```

0.0.7.255 deny ip 10.2.99.0
0.0.0.255 10.2.20.0 0.0.0.255
deny ip 10.2.99.0 0.0.0.255
10.2.25.0 0.0.0.255 deny ip
10.2.99.0 0.0.0.255 10.2.30.0
0.0.0.255 deny ip 10.2.99.0
0.0.0.255 10.2.40.0 0.0.0.255
deny ip 10.2.99.0 0.0.0.255
10.2.50.0 0.0.0.255
deny ip 10.2.99.0 0.0.0.255
10.2.60.0 0.0.0.255 deny ip
10.2.99.0 0.0.0.255 10.2.80.0


```
0.0.0.255 permit ip 10.2.99.0
0.0.0.255 10.2.70.0 0.0.0.255
deny ip 10.2.99.0 0.0.0.255
10.0.0.0 0.255.255.255 permit
ip any any ip access-list
extended
```

VLAN70-IN

```
permit ip any any ip access-list
extended LOKALEN-IN permit
udp any any eq bootps permit
udp any any eq bootpc permit
ip any 10.2.8.0
```

0.0.7.255

permit ip any 10.2.80.0

0.0.0.255

deny ip 10.0.0.0

0.255.255.255 10.0.0.0

0.255.255.255

permit ip any any

!

!

!

!

!

line con 0 password

!Tadmin logging

synchronous login

!

line aux 0

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input

ssh !

!

!

!

end

MLS#

SWDistrMid2# show run
Building configuration...

Current configuration : 5103
bytes

!

version 15.0 no service
timestamps log datetime msec

no service timestamps debug

datetime msec

no service passwordencryption

!

hostname SWDistrMid2

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip
domain-name
Dennenappel.local

!

username admin secret 5
\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

!

no ip dhcp snooping
information option

!

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid

!

interface Port-channel2
switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9

9 switchport mode

trunk switchport

nonegotiate

!

interface Port-channel5

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode

trunk

!

interface FastEthernet0/1

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

ip arp inspection trust ip

dhcp snooping trust

switchport mode trunk

!

interface FastEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/3

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/4

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk !

interface FastEthernet0/5

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

ip arp inspection trust ip

dhcp snooping trust

switchport mode trunk

!

interface FastEthernet0/6

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/7

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/8

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

interface FastEthernet0/9

switchport trunk native vlan

!

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

interface FastEthernet0/10

```
switchport trunk native vlan  
trust switchport mode  
trunk  
!
```

```
interface FastEthernet0/11
```

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/11 ip

arp inspection trust

ip dhcp snooping trust

!

interface FastEthernet0/12

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/13

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/14

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/15

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/16

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/17

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/18 ip

arp inspection trust ip dhcp

snooping trust shutdown

!

interface FastEthernet0/19

ip arp inspection trust ip

dhcp snooping trust

shutdown

!

interface FastEthernet0/20 ip

arp inspection trust

ip dhcp snooping trust

shutdown

!

interface FastEthernet0/21

switchport trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk channel-group 5

mode active

!

```
interface FastEthernet0/22
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection
trust ip dhcp snooping
trust switchport mode
trunk channel-group 5
mode active
```

!

```
interface FastEthernet0/23
```

```
ip arp inspection trust ip
```

```
dhcp snooping trust
```

```
shutdown
```

!

```
interface FastEthernet0/24
```

```
ip arp inspection trust ip
```

```
dhcp snooping trust
```

```
shutdown
```

!

```
interface GigabitEthernet0/1
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9 ip arp inspection trust
ip dhcp snooping trust
switchport mode trunk
switchport nonegotiate
```

channel-group 2 mode

active spanning-tree

guard root

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk switchport

nonegotiate channel-

group 2 mode active

spanning-tree guard

root

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99

ip address 10.2.99.12

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

SWDistrMid2#

SWDistrMid1#show run

Building configuration...

Current configuration : 6182

bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname SWDistrMid1

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

```
ip ssh version 2 ip  
domain-name  
Dennenappel.local
```

```
!
```

```
username admin secret 5  
$1$mERr$teH.a5ZJRInj8IW12z  
uxQ0
```

```
!
```

```
!
```

```
no ip dhcp snooping  
information option
```

!

spanning-tree mode pvst

spanning-tree portfast

bpduguard default spanning-
tree extend systemid

spanning-tree vlan 1-4094

priority 28672

!

interface Port-channel3

switchport trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9 9

switchport mode trunk

switchport nonegotiate

!

interface Port-channel5

description Uplink

Distr2Distr1Middelbaar

switchport trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9
9,999

switchport mode trunk

!

interface FastEthernet0/1

switchport trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk !

interface FastEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

ip arp inspection trust ip

dhcp snooping trust

switchport mode trunk

!

interface FastEthernet0/3

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/4

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/5

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/6

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/7

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/8

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/9

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface FastEthernet0/10

switchport trunk native vlan

interface FastEthernet0/11

switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode
trunk

!

interface FastEthernet0/11

switchport access vlan 70 ip

spanning-tree portfast

arp inspection trust ip dhcp

snooping trust switchport

mode access switchport

nonegotiate

switchport port-security

maximum 2 switchport port-

security macaddress sticky

switchport port-security

macaddress sticky

0001.4248.C22E

switchport port-security

macaddress sticky

!

```
interface FastEthernet0/12
switchport access vlan 80
switchport mode access
switchport nonegotiate
switchport port-security
switchport port-security
maximum 2
```


spanning-tree portfast

!

interface FastEthernet0/13

switchport access vlan 80

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2

switchport port-security

macaddress sticky

spanning-tree portfast

!

interface FastEthernet0/14

switchport access vlan 80

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2

switchport port-security

macaddress sticky

spanning-tree portfast

!

interface FastEthernet0/15

switchport access vlan 80

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2

switchport port-security

macaddress sticky

spanning-tree portfast

!

interface FastEthernet0/16

switchport access vlan 80

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2

switchport port-security

macaddress sticky

spanning-tree portfast

!

interface FastEthernet0/17

switchport access vlan 10

switchport mode access

switchport nonegotiate

switchport port-security

macaddress sticky spanning-

tree portfast

!

interface FastEthernet0/18

switchport access vlan 20

switchport mode access

switchport nonegotiate
switchport port-security
macaddress sticky spanning-
tree portfast

!

interface FastEthernet0/19
switchport access vlan 30
switchport mode access
switchport nonegotiate
switchport port-security

macaddress sticky spanning-
tree portfast

!

interface FastEthernet0/20
shutdown

!

interface FastEthernet0/21
switchport trunk native vlan
999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9
9,999 switchport mode trunk
channel-group 5 mode active
!

interface FastEthernet0/22
switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9

9,999 switchport mode trunk
channel-group 5 mode active
!

interface FastEthernet0/23
shutdown
!

interface FastEthernet0/24
shutdown
!

```
interface GigabitEthernet0/1
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9
ip arp inspection trust ip
dhcp snooping trust
switchport mode trunk
switchport nonegotiate
```

channel-group 3 mode

active spanning-tree

guard root

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk switchport

nonegotiate channel-

group 3 mode active

spanning-tree guard

root

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99

ip address 10.2.99.13

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

SWDistrMid1#

MLS-Redundant#show run

Building configuration...

Current configuration : 6441
bytes

!

version 15.1 no service

timestamps log datetime msec

no service timestamps debug
datetime msec service
password-encryption

!

hostname MLS-Redundant

!

!

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5
ql2f1/

!

ip dhcp relay information trust-
all

!

!

ip dhcp excluded-address
10.2.20.1 10.2.20.29 ip
dhcp excluded-address
10.2.25.1 10.2.25.29 ip
dhcp excluded-address
10.2.30.1 10.2.30.29 ip

dhcp excluded-address
10.2.40.1 10.2.40.29 ip

dhcp excluded-address
10.2.50.1 10.2.50.29 ip

dhcp excluded-address
10.2.60.1 10.2.60.29

ip dhcp excluded-address
10.2.70.1 10.2.70.250

ip dhcp excluded-address
10.2.80.1 10.2.80.29 ip

dhcp excluded-address
10.2.8.1 10.2.8.29

!

ip dhcp pool VLAN10 network

10.2.8.0 255.255.248.0

default-router 10.2.8.254 dns-

server 8.8.8.8 ip dhcp pool

VLAN20 network 10.2.20.0

255.255.255.0 default-router

10.2.20.254 ip dhcp pool

VLAN25 network 10.2.25.0

255.255.255.0 default-router

10.2.25.254 ip dhcp pool

VLAN30 network 10.2.30.0

255.255.255.0 default-router

10.2.30.254 ip dhcp pool

VLAN40 network 10.2.40.0

255.255.255.0 default-router

10.2.40.254 ip dhcp pool

VLAN50 network 10.2.50.0

255.255.255.0 default-router

10.2.50.254 ip dhcp pool

VLAN60 network 10.2.60.0

255.255.255.0 default-router

10.2.60.254 ip dhcp pool

VLAN70 network 10.2.70.0

255.255.255.0 default-router

10.2.70.254 ip dhcp pool

VLAN80 network 10.2.80.0

255.255.255.0 default-router

10.2.80.254

!

!

!

ip cef no

ipv6 cef

!

!

!

username ITadmin privilege 15

secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

license udi pid CISCO2911/K9 sn

FTX1524YP29-

!

!

!

!

!

!

!

!

!

!

!

ip domain-name

Dennenappel.local

!

!

spanning-tree mode pvst !

!

!

!

!

!

```
interface GigabitEthernet0/0  
no ip address duplex auto  
speed auto  
!
```

interface

GigabitEthernet0/0.10

encapsulation dot1Q 10

ip address 10.2.8.4

255.255.248.0 standby

version 2 standby 10 ip

10.2.8.254 standby 10

priority 105 standby 10

preempt standby

preempt

!

interface

GigabitEthernet0/0.20

encapsulation dot1Q 20

ip address 10.2.20.4

255.255.255.0 standby

version 2 standby 20 ip

10.2.20.254 standby 20

priority 105 standby 20

preempt standby

preempt

!

interface

GigabitEthernet0/0.25

encapsulation dot1Q 25

ip address 10.2.25.4

255.255.255.0 standby

version 2 standby 25 ip

10.2.25.254 standby 25

priority 105 standby 25

preempt standby

preempt

!

interface

GigabitEthernet0/0.30

encapsulation dot1Q 30

ip address 10.2.30.4

255.255.255.0 standby

version 2 standby 30 ip

10.2.30.254 standby 30

priority 105 standby 30

preempt standby

preempt

!

interface

GigabitEthernet0/0.40

encapsulation dot1Q 40

ip address 10.2.40.4

255.255.255.0 standby

version 2 standby 40 ip

10.2.40.254 standby 40

priority 105 standby 40

preempt standby

!

interface

preempt

GigabitEthernet0/0.50

encapsulation dot1Q 50

ip address 10.2.50.4

255.255.255.0 standby

version 2 standby 50 ip

10.2.50.254 standby 50

priority 105 standby 50

preempt standby

!

interface

preempt

GigabitEthernet0/0.60

encapsulation dot1Q 60

ip address 10.2.60.4

255.255.255.0 standby

version 2 standby 60 ip

10.2.60.254 standby 60

priority 105 standby 60

preempt standby

!

interface

preempt

GigabitEthernet0/0.70

encapsulation dot1Q 70

ip address 10.2.70.4

255.255.255.0 standby

version 2 standby 70 ip

10.2.70.254 standby 70

priority 105 standby 70

preempt standby

!

interface

preempt

GigabitEthernet0/0.80

encapsulation dot1Q 80

ip address 10.2.80.4

255.255.255.0 standby

version 2 standby 80 ip

10.2.80.254 standby 80

priority 105 standby 80

preempt standby

!

interface

preempt

GigabitEthernet0/0.99

encapsulation dot1Q 99

ip address 10.2.99.4

255.255.255.0 standby

version 2 standby 99 ip

10.2.99.254 standby 99

priority 105 standby 99

!

interface

preempt standby

preempt

!

```
interface GigabitEthernet0/1  
no ip address duplex auto  
speed auto
```

!

```
interface GigabitEthernet0/2  
no ip address duplex auto  
speed auto shutdown
```

!

interface Vlan1 no

ip address

shutdown

!

ip classless

!

ip flow-export version 9

!

!

ip access-list extended

VLAN10-IN

permit udp any host

224.0.0.102 eq 1985 deny

ip 10.2.8.0 0.0.7.255

10.2.20.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.25.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.30.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.40.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255


```
10.2.50.0 0.0.0.255
deny ip 10.2.8.0 0.0.7.255
10.2.60.0 0.0.0.255 deny ip
10.2.8.0 0.0.7.255
10.2.70.0 0.0.0.255 deny ip
10.2.8.0 0.0.7.255
10.2.80.0 0.0.0.255 deny ip
10.2.8.0 0.0.7.255
10.2.99.0 0.0.0.255 permit
ip any any ip access-list
extended
VLAN20-IN
```

```
permit udp any host
224.0.0.102 eq 1985 permit ip
10.2.20.0 0.0.0.255 10.2.80.0
0.0.0.255 deny ip 10.2.20.0
0.0.0.255 10.2.10.0 0.0.0.255
deny ip 10.2.20.0 0.0.0.255
10.2.30.0 0.0.0.255 deny ip
10.2.20.0 0.0.0.255 10.2.70.0
0.0.0.255 deny ip 10.2.20.0
0.0.0.255
10.2.99.0 0.0.0.255
```

```
permit ip any any ip access-list
extended VLAN25-IN permit
udp any host 224.0.0.102 eq
1985 permit ip 10.2.25.0
0.0.0.255 10.2.80.0 0.0.0.255
deny ip 10.2.25.0 0.0.0.255
10.2.10.0 0.0.0.255 deny ip
10.2.25.0 0.0.0.255
10.2.30.0 0.0.0.255
deny ip 10.2.25.0 0.0.0.255
10.2.70.0 0.0.0.255 deny ip
10.2.25.0 0.0.0.255
```

```
10.2.99.0 0.0.0.255 permit  
ip any any ip access-list  
extended VLAN30-IN permit  
udp any host 224.0.0.102 eq  
1985 deny ip 10.2.30.0  
0.0.0.255 10.0.0.0  
0.255.255.255 permit ip any  
any ip access-list extended  
LOKALEN-IN permit udp any  
host 224.0.0.102 eq 1985  
permit udp any any eq  
bootps permit udp any any
```

eq bootpc permit ip any
10.2.8.0

0.0.7.255

permit ip any 10.2.80.0
0.0.0.255

deny ip 10.0.0.0
0.255.255.255 10.0.0.0
0.255.255.255

permit ip any any ip
access-list extended
VLAN70-IN permit udp

any host 224.0.0.102 eq
1985 permit ip any any
ip access-list extended

VLAN80-IN

permit udp any host
224.0.0.102 eq 1985 permit ip
10.2.80.0 0.0.0.255 10.2.20.0
0.0.0.255 permit ip 10.2.80.0
0.0.0.255 10.2.25.0 0.0.0.255
permit ip 10.2.80.0 0.0.0.255
10.2.70.0 0.0.0.255 deny ip
10.2.80.0 0.0.0.255 10.0.0.0

0.255.255.255 permit ip any
any

ip access-list extended

VLAN99-IN permit udp any

host 224.0.0.102 eq 1985

permit udp any any eq bootps

permit udp any any eq bootpc

permit ip 10.2.99.0 0.0.0.255

10.2.70.0 0.0.0.255 deny ip

10.2.99.0 0.0.0.255 10.0.0.0

0.255.255.255 permit ip any
any

!

!

!

!

!

line con 0 password

7

0808784F0D140C19

login

!

line aux 0

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

end MLS-Redundant#

ALLE SWITCHEN VOOR DE
KLASLOKALEN EN IT ADMIN

Linux1#show run

Building configuration...

Current configuration : 2458
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname Linux1

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip
domain-name
Dennenappel.local

!

username admin secret 5
\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

```
ip arp inspection vlan  
10,20,25,30,40,50,60,70,80,9  
9
```

```
!
```

```
ip dhcp snooping vlan  
10,20,25,30,40,50,60,70,80,9 9
```

```
no ip dhcp snooping  
information option ip  
dhcp snooping
```

```
!
```

```
spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960
!
```

```
interface FastEthernet0/1
switchport access vlan 60
switchport mode access
switchport nonegotiate
```

```
switchport port-security
maximum 2 switchport port-
security macaddress sticky
switchport port-security
macaddress sticky
0060.47CB.C939 spanning-tree
portfast
!
interface FastEthernet0/2
shutdown
!
```

interface FastEthernet0/3

shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

interface GigabitEthernet0/1

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface GigabitEthernet0/2

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99 ip

address 10.2.99.23

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Linux1#

Klassen1ste1#show run

Building configuration...

Current configuration : 2368
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname Klassen1ste1

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip
domain-name
Dennenappel.local

!

username admin secret 5
\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

!

no ip dhcp snooping
information option

!

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid

spanning-tree vlan 1-4094
priority 40960

!

interface Port-channel5

!

interface FastEthernet0/1

switchport access vlan 40

switchport mode access

switchport nonegotiate

switchport port-security

maximum 2

switchport port-security

macaddress sticky switchport

port-security macaddress sticky
00D0.D306.EA98 spanning-tree
portfast

!

interface FastEthernet0/2
shutdown

!

interface FastEthernet0/3
shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

```
interface FastEthernet0/23
```

```
shutdown
```

!

```
interface FastEthernet0/24
```

```
shutdown
```

!

```
interface GigabitEthernet0/1
```

```
switchport trunk native vlan
```


999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9
9,999

ip arp inspection trust ip

dhcp snooping trust

switchport mode trunk

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface Vlan1

no ip address shutdown

!

```
interface Vlan99 ip  
address 10.2.99.18  
255.255.255.0
```

!

```
ip default-gateway 10.2.99.1
```

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input

ssh !

!

!

!

end

Klassen1ste1#

Windows2#show run Building
configuration...

Current configuration : 2289
bytes

!

version 15.0 no service
timestamps log datetime msec
no service timestamps debug
datetime msec

no service passwordencryption

!

hostname Windows2

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip

domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teH.a5ZJRInj8IW12z

uxQ0

!

ip arp inspection vlan

10,20,25,30,40,50,60,70,80,9 9

!

ip dhcp snooping vlan

10,20,25,30,40,50,60,70,80,9

9 ip dhcp

snooping

!

spanning-tree mode pvst

spanning-tree portfast

bpduguard default spanning-
tree extend systemid

spanning-tree vlan 1-4094

priority 40960

!

interface FastEthernet0/1

switchport access vlan 50

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2

switchport port-security

macaddress sticky spanning-
tree portfast

!

interface FastEthernet0/2

shutdown

!

interface FastEthernet0/3

shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

```
interface FastEthernet0/10
```

```
shutdown
```

!

```
interface FastEthernet0/11
```

```
shutdown
```

!

```
interface FastEthernet0/12
```

```
shutdown
```

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

```
interface GigabitEthernet0/1  
switchport trunk native vlan  
999
```

```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode  
trunk
```

!

```
interface GigabitEthernet0/2  
switchport trunk native vlan
```

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9
9,999

switchport mode trunk

!

interface Vlan1 no

ip address

shutdown

!

```
interface Vlan99 ip  
address 10.2.99.20  
255.255.255.0
```

```
!
```

```
ip default-gateway 10.2.99.1 !
```

```
!
```

```
!
```

```
!
```

```
line con 0 password
```

```
lTadmin login
```

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Windows 2#

Klassen1ste2#show run

Building configuration...

Current configuration : 2293

bytes

!

version 15.0 no service
timestamps log datetime
msec

no service timestamps debug
datetime msec no service
passwordencryption

!

hostname Klassen1ste2

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip

domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z

uxQ0

!

ip arp inspection vlan

10,20,25,30,40,50,60,70,80,9

9

!

ip dhcp snooping vlan

10,20,25,30,40,50,60,70,80,9

9 ip dhcp

snooping

!

```
spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960
!
```

```
interface FastEthernet0/1
switchport access vlan 40
switchport mode access
switchport nonegotiate
```

switchport port-security

switchport port-security

maximum 2 switchport port-

security macaddress sticky

spanning-tree portfast

!

interface FastEthernet0/2

shutdown

!

```
interface FastEthernet0/3  
shutdown
```

```
!
```

```
interface FastEthernet0/4  
shutdown
```

```
!
```

```
interface FastEthernet0/5  
shutdown
```

```
!
```

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

```
interface FastEthernet0/24
```

```
shutdown
```

```
!
```

```
interface GigabitEthernet0/1
```

```
switchport trunk native vlan
```

```
999
```

```
switchport trunk allowed vlan
```

```
10,20,25,30,40,50,60,70,80,9
```

```
9,999 switchport mode
```

```
trunk
```

```
!
```

```
interface GigabitEthernet0/2
switchport trunk native vlan
999
```

```
switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode
trunk
```

```
!
```

interface Vlan1 no

ip address

shutdown

!

interface Vlan99

ip address 10.2.99.19

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Windows1(config)#do show run
Building configuration...

Current configuration : 2525
bytes

!

version 15.0 no service
timestamps log datetime msec
no service timestamps debug
datetime msec service
password-encryption

!

hostname Windows1

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip
domain-name
Dennenappel.local

!

username ITadmin secret 5
\$1\$mERr\$xStD5fBVA7F6qhs5
ql2f1/ username admin secret 5
\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

```
ip arp inspection vlan
10,20,25,30,40,50,60,70,80,9
9
!
```

```
ip dhcp snooping vlan
10,20,25,30,40,50,60,70,80,9
9 no ip dhcp
snooping
information option ip
dhcp snooping
!
```

```
spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960
!
```

```
interface FastEthernet0/1
switchport access vlan 50
switchport mode access
switchport nonegotiate
```

```
switchport port-security  
maximum 2
```

```
switchport port-security  
macaddress sticky switchport  
port-security macaddress sticky  
0005.5E18.924E spanning-tree  
portfast
```

!

```
interface FastEthernet0/2  
shutdown
```

!

```
interface FastEthernet0/3  
shutdown
```

```
!
```

```
interface FastEthernet0/4  
shutdown
```

```
!
```

```
interface FastEthernet0/5  
shutdown
```

```
!
```

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

interface GigabitEthernet0/1

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface GigabitEthernet0/2

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99 ip

address 10.2.99.21

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

7

0808784F0D140C19

login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input

ssh !

!

!

!

end

Linux2#show run

Building configuration...

Current configuration : 2287
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname Linux2

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2

ip domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

ip arp inspection vlan
10,20,25,30,40,50,60,70,80,9
9

!

ip dhcp snooping vlan
10,20,25,30,40,50,60,70,80,9
9 ip dhcp
snooping

!

spanning-tree mode pvst

spanning-tree portfast

bpduguard default spanning-
tree extend systemid

spanning-tree vlan 1-4094

priority 40960

!

interface FastEthernet0/1

switchport access vlan 60

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2

switchport port-security

macaddress sticky spanning-
tree portfast

!

interface FastEthernet0/2

shutdown

!

interface FastEthernet0/3

shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

```
interface FastEthernet0/10
```

```
shutdown
```

!

```
interface FastEthernet0/11
```

```
shutdown
```

!

```
interface FastEthernet0/12
```

```
shutdown
```

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

```
interface GigabitEthernet0/1
switchport trunk native vlan
999
```

```
switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode
trunk
```

!

```
interface GigabitEthernet0/2
switchport trunk native vlan
```

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9
9,999

switchport mode trunk

!

interface Vlan1 no

ip address

shutdown

!


```
interface Vlan99 ip  
address 10.2.99.22  
255.255.255.0
```

```
!
```

```
ip default-gateway 10.2.99.1 !
```

```
!
```

```
!
```

```
!
```

```
line con 0 password
```

```
lTadmin login
```

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Linux2# Wet2#show run

Building configuration...

Current configuration : 2285
bytes

!

version 15.0 no service
timestamps log datetime
msec

no service timestamps debug
datetime msec no service
passwordencryption

!

hostname Wet2

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip

domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z

uxQ0

!

ip arp inspection vlan

10,20,25,30,40,50,60,70,80,9

9

!

ip dhcp snooping vlan

10,20,25,30,40,50,60,70,80,9

9 ip dhcp

snooping

!

```
spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960
!
```

```
interface FastEthernet0/1
switchport access vlan 50
switchport mode access
switchport nonegotiate
```

switchport port-security

switchport port-security

maximum 2 switchport port-

security macaddress sticky

spanning-tree portfast

!

interface FastEthernet0/2

shutdown

!


```
interface FastEthernet0/3  
shutdown
```

```
!
```

```
interface FastEthernet0/4  
shutdown
```

```
!
```

```
interface FastEthernet0/5  
shutdown
```

```
!
```

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

```
interface FastEthernet0/24
```

```
shutdown
```

```
!
```

```
interface GigabitEthernet0/1
```

```
switchport trunk native vlan
```

```
999
```

```
switchport trunk allowed vlan
```

```
10,20,25,30,40,50,60,70,80,9
```

```
9,999 switchport mode
```

```
trunk
```

```
!
```



```
interface GigabitEthernet0/2
switchport trunk native vlan
999
```

```
switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode
trunk
```

```
!
```

interface Vlan1 no

ip address

shutdown

!

interface Vlan99

ip address 10.2.99.24

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Wet2#

Wet1#show run

Building configuration...

Current configuration : 2285
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname Wet1

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

```
ip ssh version 2 ip  
domain-name  
Dennenappel.local
```

!

```
username admin secret 5  
$1$mERr$teH.a5ZJRInj8IW12z  
uxQ0
```

!

```
ip arp inspection vlan  
10,20,25,30,40,50,60,70,80,9  
9
```

!

ip dhcp snooping vlan
10,20,25,30,40,50,60,70,80,9
9 ip dhcp
snooping !

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960

!

interface FastEthernet0/1

switchport access vlan 50

switchport mode access

switchport nonegotiate

switchport port-security

switchport port-security

maximum 2 switchport port-

security macaddress sticky

spanning-tree portfast

!

```
interface FastEthernet0/2
```

```
shutdown
```

!

```
interface FastEthernet0/3
```

```
shutdown
```

!

```
interface FastEthernet0/4
```

```
shutdown
```

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

```
interface FastEthernet0/12
```

```
shutdown
```

!

```
interface FastEthernet0/13
```

```
shutdown
```

!

```
interface FastEthernet0/14
```

```
shutdown
```

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

interface GigabitEthernet0/1

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

switchport mode trunk

!

```
interface GigabitEthernet0/2  
switchport trunk native vlan  
999
```

```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode  
trunk
```

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99 ip

address 10.2.99.25

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Wet1#

SWSecr&OnthMiddelbaar#sh
ow run

Building configuration...

Current configuration : 2473
bytes

!

version 15.0 no service
timestamps log datetime msec

no service timestamps debug
datetime msec no service
passwordencryption

!

hostname

SWSecr&OnthMiddelbaar

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2

ip domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z

uxQ0

!


```
ip arp inspection vlan
10,20,25,30,40,50,60,70,80,9
9
!
```

```
ip dhcp snooping vlan
10,20,25,30,40,50,60,70,80,9
9 no ip dhcp
snooping
information option ip
dhcp snooping
!
```

```
spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960
!
```

```
interface FastEthernet0/1
switchport access vlan 25
switchport mode access
switchport nonegotiate
```

```
switchport port-security  
maximum 2
```

```
switchport port-security  
macaddress sticky switchport  
port-security macaddress sticky  
00D0.FF24.6B46 spanning-tree  
portfast
```

!

```
interface FastEthernet0/2  
shutdown
```

!

```
interface FastEthernet0/3  
shutdown
```

```
!
```

```
interface FastEthernet0/4  
shutdown
```

```
!
```

```
interface FastEthernet0/5  
shutdown
```

```
!
```

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

```
interface FastEthernet0/24
```

```
shutdown
```

```
!
```

```
interface GigabitEthernet0/1
```

```
switchport trunk native vlan
```

```
999
```

```
switchport trunk allowed vlan
```

```
10,20,25,30,40,50,60,70,80,9
```

```
9,999 ip arp inspection
```

```
trust ip dhcp snooping
```

trust switchport mode

trunk

!

interface GigabitEthernet0/2

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface Vlan1 no

ip address

shutdown

!

interface Vlan99 ip

address 10.2.99.26

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

SWSecr&OnthMiddelbaar#

KlassenGelijkvl#show run

Building configuration...

Current configuration : 2498
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec no service

passwordencryption

!

hostname KlassenGelijkvl

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip

domain-name

Dennenappel.local !

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z

uxQ0

!

```
ip arp inspection vlan  
10,20,25,30,40,50,60,70,80,9  
9
```

```
!
```

```
ip dhcp snooping vlan  
10,20,25,30,40,50,60,70,80,9 9
```

```
no ip dhcp snooping  
information option ip  
dhcp snooping
```

```
!
```

```
spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
spanning-tree vlan 1-4094
priority 40960
!
```

```
interface FastEthernet0/1
switchport access vlan 40 ip
dhcp snooping limit rate 5
```

switchport mode access

switchport nonegotiate

switchport port-security

maximum 2 switchport port-
security macaddress sticky

switchport port-security
macaddress sticky

0060.3E50.B479 spanning-tree

portfast

!

interface FastEthernet0/2

shutdown

!

interface FastEthernet0/3

shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!


```
interface FastEthernet0/11  
shutdown
```

```
!
```

```
interface FastEthernet0/12  
shutdown
```

```
!
```

```
interface FastEthernet0/13  
shutdown
```

```
!
```

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

interface GigabitEthernet0/1

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface GigabitEthernet0/2

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface Vlan1 no

ip address

shutdown

!

```
interface Vlan99 ip  
address 10.2.99.27  
255.255.255.0
```

```
!
```

```
ip default-gateway 10.2.99.1
```

```
!
```

```
!
```

```
!
```

```
!
```


line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

KlassenGelijkvl#

SWSecretariaatKleuter#show

run

Building configuration...

Current configuration : 2568
bytes

!

version 15.0 no service
timestamps log datetime msec
no service timestamps debug
datetime msec no service
passwordencryption

!

hostname

SWSecretariaatKleuter

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2

ip domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teH.a5ZJRInj8IW12z

uxQ0

!

!

ip dhcp snooping vlan

10,20,25,30,40,50,60,70,80,9 9

no ip dhcp snooping
information option

!

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid

!

interface Port-channel3
switchport trunk native vlan
999

```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode  
trunk
```

!

```
interface FastEthernet0/1  
shutdown
```

!

```
interface FastEthernet0/2  
shutdown
```

!

```
interface FastEthernet0/3
```

```
shutdown
```

!

```
interface FastEthernet0/4
```

```
shutdown
```

!

```
interface FastEthernet0/5
```

```
shutdown
```

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

```
interface FastEthernet0/19
```

```
shutdown
```

!

```
interface FastEthernet0/20
```

```
shutdown
```

!

```
interface FastEthernet0/21
```

```
shutdown
```

!

```
interface FastEthernet0/22
```

```
shutdown
```

!

```
interface FastEthernet0/23
```

```
shutdown
```

!

```
interface      FastEthernet0/24
switchport    access    vlan    25
switchport    mode      access
switchport nonegotiate
switchport port-security
maximum 2 switchport port-
security macaddress sticky
switchport port-security
macaddress sticky
0005.5E5E.EE24 spanning-tree
portfast interface
```

!

GigabitEthernet0/1 switchport
trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9
9,999

ip arp inspection trust ip dhcp

snooping trust switchport

mode trunk channel-group 3

mode active

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

ip arp inspection trust ip dhcp

snooping trust switchport

mode trunk channel-group 3

!

mode active interface Vlan1

no ip address shutdown

!

interface Vlan99 ip

address 10.2.99.14

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15

login local transport

input ssh

!

!

!

!

end

SWSecretariaatKleuter#

SWKlassenkleuter#show run

Building configuration...

Current configuration : 2560
bytes

!

version 15.0 no service

timestamps log datetime msec

no service timestamps debug

datetime msec

no service passwordencryption

!

hostname SWKlassenkleuter

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

```
ip ssh version 2 ip  
domain-name  
Dennenappel.local
```

```
!
```

```
username admin secret 5  
$1$mERr$teH.a5ZJRInj8IW12z  
uxQ0
```

```
!
```

```
!
```

```
ip dhcp snooping vlan  
10,20,25,30,50,60,70,80,99 no
```

ip dhcp snooping information
option

!

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid

!

interface Port-channel2
switchport trunk native vlan
999


```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 switchport mode  
trunk
```

!

```
interface FastEthernet0/1  
shutdown
```

!

```
interface FastEthernet0/2  
shutdown
```

!

```
interface FastEthernet0/3
```

```
shutdown
```

!

```
interface FastEthernet0/4
```

```
shutdown
```

!

```
interface FastEthernet0/5
```

```
shutdown
```

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

```
interface FastEthernet0/19
```

```
shutdown
```

!

```
interface FastEthernet0/20
```

```
shutdown
```

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

!

```
interface      FastEthernet0/24
```

```
switchport    access    vlan    40
```

```
switchport    mode      access
```

```
switchport nonegotiate
```

```
switchport port-security
```

```
maximum 2 switchport port-
```

```
security macaddress sticky
```

```
switchport port-security
```

```
macaddress sticky
```

```
00E0.F75D.E173 spanning-tree
```

```
portfast interface
```

GigabitEthernet0/1 switchport
trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9
9,999

ip arp inspection trust ip dhcp
snooping trust switchport

mode trunk channel-group 2

mode active

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999

ip arp inspection trust ip dhcp

snooping trust switchport

mode trunk channel-group 2

!

mode active interface Vlan1

no ip address shutdown

!

interface Vlan99 ip

address 10.2.99.13

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15

login local transport

input ssh

!

!

!

!

end

SWKlassenkleuter#

SWKlassenLager#show run

Building configuration...

Current configuration : 2686
bytes

!

version 15.0 no service
timestamps log datetime
msec

no service timestamps debug
datetime msec no service
passwordencryption

!

hostname SWKlassenLager

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip
domain-name
Dennenappel.local

!

username admin secret 5
\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

!

ip dhcp snooping vlan
10,20,25,30,40,50,60,70,80,9
9 no ip dhcp
snooping
information option
!

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid
!

```
interface Port-channel4
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9,999
switchport mode trunk
!
interface FastEthernet0/1
shutdown
```

!

```
interface FastEthernet0/2
```

```
shutdown
```

!

```
interface FastEthernet0/3
```

```
shutdown
```

!

```
interface FastEthernet0/4
```

```
shutdown
```

!

```
interface FastEthernet0/5  
shutdown
```

```
!
```

```
interface FastEthernet0/6  
shutdown
```

```
!
```

```
interface FastEthernet0/7  
shutdown
```

```
!
```

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

switchport access vlan 40

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode

access switchport

nonegotiate switchport

port-security switchport

port-security maximum 2

switchport port-security

macaddress sticky switchport

port-security macaddress sticky

000A.4143.EDE2 spanning-tree

portfast

!

```
interface GigabitEthernet0/1  
switchport trunk native vlan  
999
```

```
switchport trunk allowed vlan  
10,20,25,30,40,50,60,70,80,9  
9,999 ip arp inspection trust ip  
dhcp snooping trust
```

```
switchport mode trunk
```

```
channel-group 4 mode active
```

```
!
```

```
interface GigabitEthernet0/2
switchport trunk native vlan
999
```

```
switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection trust ip
dhcp snooping trust
```

```
switchport mode trunk
```

```
channel-group 4 mode active
```

```
!
```

```
interface Vlan1
```

no ip address shutdown

!

interface Vlan99 ip

address 10.2.99.15

255.255.255.0

!

ip default-gateway 10.2.99.1

!

!

!

!

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input

ssh !

!

!

!

end

SWKlassenLager#

SWitLager#show run

Building configuration...

Current configuration : 2455
bytes

!

version 15.0 no service
timestamps log datetime msec
no service timestamps debug
datetime msec no service
passwordencryption

!

hostname SWitLager

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2

ip domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teh.a5ZJRInj8IW12z
uxQ0

!

ip arp inspection vlan
10,20,25,30,40,50,60,70,80,9
9

!

ip dhcp snooping vlan
10,20,25,30,40,50,60,70,80,9

9 ip dhcp

snooping

!

spanning-tree mode pvst

spanning-tree portfast

bpduguard default spanning-
tree extend systemid

!

interface Port-channel5

switchport trunk native vlan

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode
trunk

!

interface FastEthernet0/1

shutdown

!

interface FastEthernet0/2

shutdown

!

interface FastEthernet0/3

shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

```
interface FastEthernet0/15
```

```
shutdown
```

!

```
interface FastEthernet0/16
```

```
shutdown
```

!

```
interface FastEthernet0/17
```

```
shutdown
```

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

```
interface FastEthernet0/24
switchport access vlan 40
switchport mode access
switchport nonegotiate
switchport port-security
switchport port-security
maximum 2 switchport port-
security macaddress sticky
spanning-tree portfast
!
```

```
interface GigabitEthernet0/1
switchport trunk native vlan
```

999 switchport trunk allowed
vlan

10,20,25,30,40,50,60,70,80,9

9,999 switchport mode trunk
channel-group 5 mode active

!

interface GigabitEthernet0/2
switchport trunk native vlan
999

switchport trunk allowed vlan
10,20,25,30,40,50,60,70,80,9

```
9,999 switchport mode trunk
channel-group 5 mode active
!
```

```
interface Vlan1 no
ip address
shutdown
```



```
interface Vlan99 ip  
address 10.2.99.16  
255.255.255.0
```

```
!
```

```
ip default-gateway 10.2.99.1
```

```
!
```

```
!
```

```
!
```

```
!
```

```
line con 0
```

!

password ITadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

end

SWitLager#

SWSecretariaatLager#show run

Building configuration...

!

Current configuration : 2613
bytes

!

version 15.0 no service
timestamps log datetime msec
no service timestamps debug
datetime msec no service
passwordencryption
hostname
SWSecretariaatLager

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2

ip domain-name

Dennenappel.local

!

!

username admin secret 5

\$1\$mERr\$teH.a5ZJRInj8IW12z

uxQ0

!

ip arp inspection vlan

10,20,25,30,50,60,70,80,99

!

ip dhcp snooping vlan
10,20,25,30,50,60,70,80,99 no
ip dhcp snooping information
option

!

spanning-tree mode pvst
spanning-tree portfast
bpduguard default spanning-
tree extend systemid

!

```
interface Port-channel6
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9,999 switchport mode
trunk
!
```

```
interface FastEthernet0/1
shutdown
```


!

```
interface FastEthernet0/2
```

```
shutdown
```

!

```
interface FastEthernet0/3
```

```
shutdown
```

!

```
interface FastEthernet0/4
```

```
shutdown
```

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

interface FastEthernet0/11

shutdown

!

interface FastEthernet0/12

shutdown

!

interface FastEthernet0/13

shutdown

!

interface FastEthernet0/14

shutdown

!

```
interface FastEthernet0/15
```

```
shutdown
```

!

```
interface FastEthernet0/16
```

```
shutdown
```

!

```
interface FastEthernet0/17
```

```
shutdown
```

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

```
interface FastEthernet0/24
switchport access vlan 25
switchport mode access
switchport nonegotiate
switchport port-security
maximum 2 switchport port-
security macaddress sticky
switchport port-security
macaddress sticky
0090.0CA6.A076 spanning-tree
portfast
```


!

```
interface GigabitEthernet0/1
switchport trunk native vlan
999 switchport trunk allowed
vlan
10,20,25,30,40,50,60,70,80,9
9,999 ip arp inspection
trust ip dhcp snooping
trust switchport mode
```

trunk channel-group 6

mode active

!

interface GigabitEthernet0/2

switchport trunk native vlan

999 switchport trunk allowed

vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

```
trust switchport mode  
trunk channel-group 6  
mode active
```

```
!
```

```
interface Vlan1 no  
ip address  
shutdown  
!
```

```
interface Vlan99 ip  
address 10.2.99.17  
255.255.255.0
```

```
!
```

```
ip default-gateway 10.2.99.1
```

```
!
```

```
!
```

```
!
```

```
!
```

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

SWSecretariaatLager#

Klassen1ste1#show run Building
configuration...

Current configuration : 2368
bytes

!

version 15.0 no service
timestamps log datetime
msec

no service timestamps debug
datetime msec no service
passwordencryption

!

hostname Klassen1ste1

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

ip ssh version 2 ip

domain-name

Dennenappel.local

!

username admin secret 5

\$1\$mERr\$teH.a5ZJRInj8IW12z

uxQ0

!

!

no ip dhcp snooping

information option

!

spanning-tree mode pvst

spanning-tree portfast

```
bpduguard default spanning-  
tree extend systemid  
spanning-tree vlan 1-4094  
priority 40960
```

```
!
```

```
interface Port-channel5
```

```
!
```

```
interface FastEthernet0/1  
switchport access vlan 40
```

switchport mode access

switchport nonegotiate

switchport port-security

maximum 2 switchport port-
security macaddress sticky

switchport port-security
macaddress sticky

00D0.D306.EA98 spanning-tree

portfast

!

interface FastEthernet0/2

shutdown

!

interface FastEthernet0/3

shutdown

!

interface FastEthernet0/4

shutdown

!

interface FastEthernet0/5

shutdown

!

interface FastEthernet0/6

shutdown

!

interface FastEthernet0/7

shutdown

!

interface FastEthernet0/8

shutdown

!

interface FastEthernet0/9

shutdown

!

interface FastEthernet0/10

shutdown

!

```
interface FastEthernet0/11  
shutdown
```

!

```
interface FastEthernet0/12  
shutdown
```

!

```
interface FastEthernet0/13  
shutdown
```

!

interface FastEthernet0/14

shutdown

!

interface FastEthernet0/15

shutdown

!

interface FastEthernet0/16

shutdown

!

interface FastEthernet0/17

shutdown

!

interface FastEthernet0/18

shutdown

!

interface FastEthernet0/19

shutdown

!

interface FastEthernet0/20

shutdown

!

interface FastEthernet0/21

shutdown

!

interface FastEthernet0/22

shutdown

!

interface FastEthernet0/23

shutdown

!

interface FastEthernet0/24

shutdown

!

interface GigabitEthernet0/1

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface GigabitEthernet0/2

switchport trunk native vlan

999

switchport trunk allowed vlan

10,20,25,30,40,50,60,70,80,9

9,999 ip arp inspection

trust ip dhcp snooping

trust switchport mode

trunk

!

interface Vlan1 no

ip address

shutdown

!

```
interface Vlan99 ip  
address 10.2.99.18  
255.255.255.0
```

```
!
```

```
ip default-gateway 10.2.99.1
```

```
!
```

```
!
```

```
!
```

```
!
```

line con 0 password

!Tadmin login

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

!

end

Klassen1ste1#

ALLE ROUTER CONFIGS

Router#show run

Building configuration...

Current configuration : 5115
bytes

!

version 15.1 no service
timestamps log datetime msec
no service timestamps debug
datetime msec

service password-encryption

!

hostname Router

!

!

!

enable secret 5

\$1\$mERr\$xStD5fBVA7F6qhs5

ql2f1/

!

!

!

!

!

!

ip cef no

ipv6 cef

!

!

!

!

license udi pid CISCO2911/K9

sn FTX1524UYDH-

!

!

!

!

!

!

!

!

!

!

!

ip domain-name
Dennenappel.local

!

!

spanning-tree mode pvst

!

!

!

!

!

!

interface GigabitEthernet0/0

ip address 10.0.0.2

255.255.255.0 duplex auto

speed auto

!

interface

GigabitEthernet0/0.10

encapsulation dot1Q 10 ip

address 10.2.8.1 255.255.248.0

standby version 2 standby 10 ip

10.2.8.254 standby 10 priority

110 standby 10 preempt

!

interface

GigabitEthernet0/0.20

encapsulation dot1Q 20 ip

address 10.2.20.1

255.255.255.0 standby version

2 standby 20 ip 10.2.20.254

standby 20 priority 110 standby

20 preempt

!

interface

GigabitEthernet0/0.25

encapsulation dot1Q 25 ip

address 10.2.25.1

255.255.255.0 standby version

2 standby 25 ip 10.2.25.254

standby 25 priority 110 standby

25 preempt

!

interface

GigabitEthernet0/0.30

encapsulation dot1Q 30 ip

address 10.2.30.1

255.255.255.0 standby version

2 standby 30 ip 10.2.30.254

standby 30 priority 110 standby

30 preempt

!

interface

GigabitEthernet0/0.40

encapsulation dot1Q 40 ip

address 10.2.40.1

255.255.255.0 standby version

2 standby 40 ip 10.2.40.254

standby 40 priority 110 standby
40 preempt

!

interface

GigabitEthernet0/0.50

encapsulation dot1Q 50

ip address 10.2.50.1

255.255.255.0 standby version

2 standby 50 ip 10.2.50.254

standby 50 priority 110 standby
50 preempt
!

interface

GigabitEthernet0/0.60

encapsulation dot1Q 60

ip address 10.2.60.1

255.255.255.0 standby version

2 standby 60 ip 10.2.60.254

standby 60 priority 110 standby
60 preempt

!

interface

GigabitEthernet0/0.70

encapsulation dot1Q 70 ip

address 10.2.70.1

255.255.255.0 standby version

2 standby 70 ip 10.2.70.254

standby 70 priority 110 standby
70 preempt

!

interface

GigabitEthernet0/0.80

encapsulation dot1Q 80 ip

address 10.2.80.1

255.255.255.0 standby version

2 standby 80 ip 10.2.80.254

standby 80 priority 110 standby
80 preempt

!

interface

GigabitEthernet0/0.99

encapsulation dot1Q 99 ip

address 10.2.99.1

255.255.255.0 standby version

2 standby 99 ip 10.2.99.254

standby 99 priority 110 standby
99 preempt

!

interface GigabitEthernet0/1
ip address 10.10.10.1
255.255.255.252 duplex auto
speed auto

!


```
interface GigabitEthernet0/2
no ip address duplex auto
speed auto shutdown
!
```

```
interface Vlan1 no
ip address
shutdown
!
```

```
ip classless ip route 10.2.0.0
255.255.0.0
```

10.2.0.1 ip route

0.0.0.0 0.0.0.0

10.10.10.2

!

ip flow-export version 9

!

!

ip access-list extended

VLAN10-IN permit udp any

host 224.0.0.102 eq 1985

deny ip 10.2.8.0 0.0.7.255

10.2.20.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.25.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.30.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.40.0 0.0.0.255

deny ip 10.2.8.0 0.0.7.255

10.2.50.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.60.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.70.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.80.0 0.0.0.255 deny ip

10.2.8.0 0.0.7.255

10.2.99.0 0.0.0.255 permit

ip any any

ip access-list extended

VLAN20-IN permit udp any

host 224.0.0.102 eq 1985

permit ip 10.2.20.0 0.0.0.255

10.2.80.0 0.0.0.255 deny ip

10.2.20.0 0.0.0.255 10.2.10.0

```
0.0.0.255 deny ip 10.2.20.0
0.0.0.255 10.2.30.0 0.0.0.255
deny ip 10.2.20.0 0.0.0.255
10.2.70.0 0.0.0.255
deny ip 10.2.20.0 0.0.0.255
10.2.99.0 0.0.0.255 permit ip
any any ip access-list
extended VLAN25-IN permit
udp any host 224.0.0.102 eq
1985 permit ip 10.2.25.0
0.0.0.255 10.2.80.0 0.0.0.255
deny ip 10.2.25.0 0.0.0.255
```

```
10.2.10.0 0.0.0.255
deny ip 10.2.25.0 0.0.0.255
10.2.30.0 0.0.0.255 deny ip
10.2.25.0 0.0.0.255
10.2.70.0 0.0.0.255 deny ip
10.2.25.0 0.0.0.255
10.2.99.0 0.0.0.255 permit
ip any any ip access-list
extended VLAN30-IN permit
udp any host 224.0.0.102 eq
1985
```

```
deny ip 10.2.30.0 0.0.0.255
10.0.0.0 0.255.255.255 permit
ip any any ip access-list
extended LOKALEN-IN permit
udp any host 224.0.0.102 eq
1985 permit udp any any eq
bootps permit udp any any eq
bootpc permit ip any 10.2.8.0
..... 81
0.0.7..... 90
permit ip any 10.2.80.0 ..... 90
0.0.0..... 90
```

```
deny ip 10.0.0.0  
0.255.255.255 10.0.0.0  
0.255.255..... 90
```

```
permit ip any any ip  
access-list extended  
VLAN70-IN permit udp  
any host 224.0.0.102 eq  
1985 permit ip any any  
ip access-list extended  
VLAN80-IN permit udp any  
host 224.0.0.102 eq 1985
```



```
permit ip 10.2.80.0 0.0.0.255  
10.2.20.0 0.0.0.255 permit ip  
10.2.80.0 0.0.0.255 10.2.25.0  
0.0.0.255 permit ip 10.2.80.0  
0.0.0.255 10.2.70.0 0.0.0.255  
deny ip 10.2.80.0 0.0.0.255  
10.0.0.0 0.255.255.255 permit  
ip any any ip access-list  
extended VLAN99-IN permit  
udp any host 224.0.0.102 eq  
1985 permit udp any any eq  
bootps permit udp any any eq
```

```
bootpc permit ip 10.2.99.0
0.0.0.255 10.2.70.0 0.0.0.255
deny ip 10.2.99.0 0.0.0.255
10.0.0.0 0.255.255.255 permit
ip any any
```

!

!

!

!

!

line con 0 password

7

0808784F0D140C19

login

!

line aux 0

!

line vty 0 4 login

local transport

input ssh line vty 5

15 login local

transport input ssh

!

!

!

end

Router#

