



192.168.1.0/24

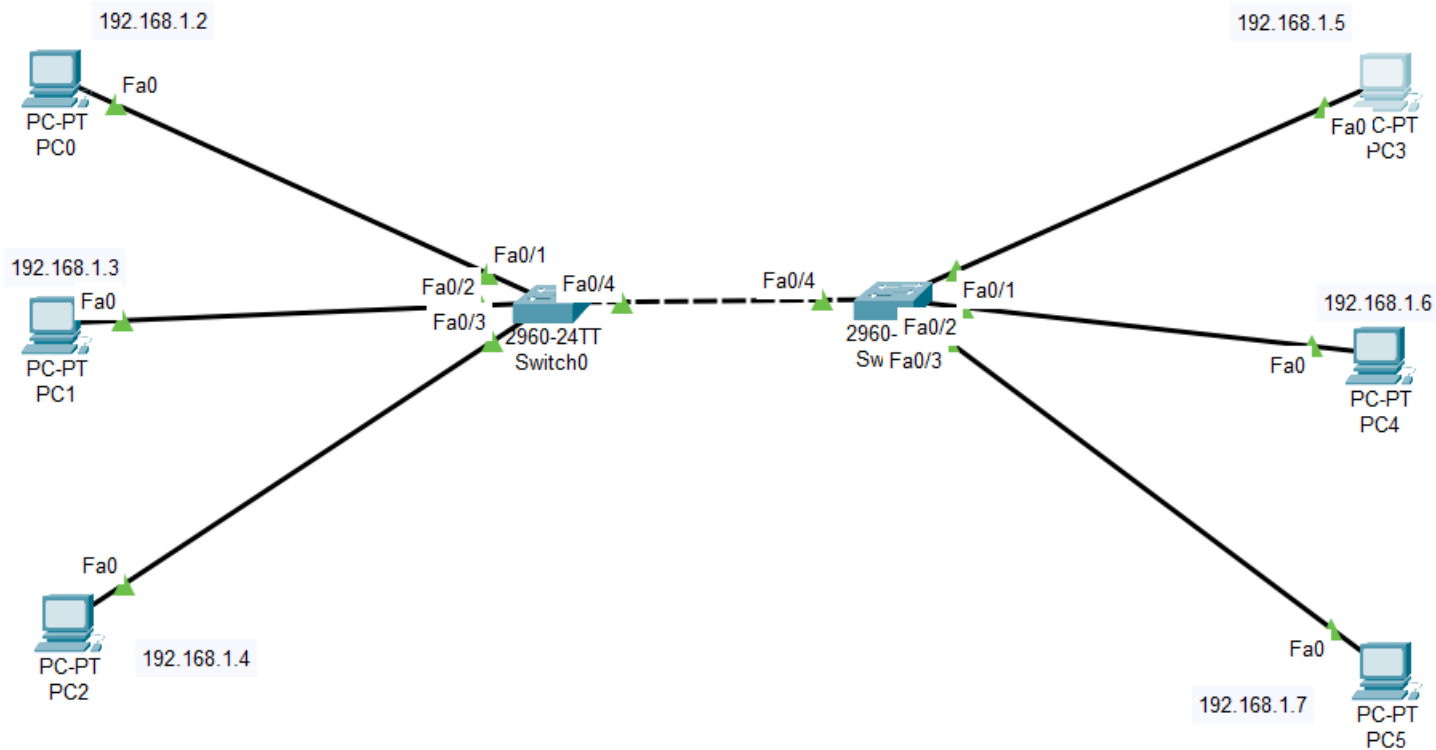

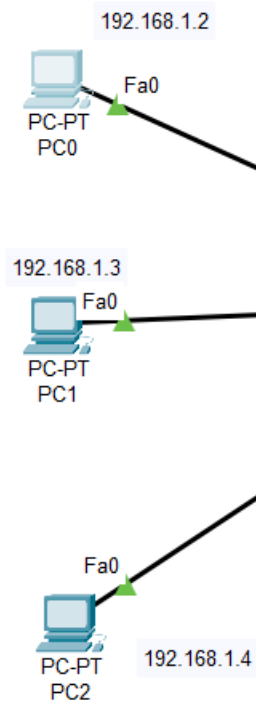

PC0

Physical Config Desktop Programming Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

Bluetooth

FastEthernet0

Port Status ☒ On

Bandwidth ☐ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0060.5C4E.DB22

IP Configuration

☐ DHCP

☒ Static

IPv4 Address 192.168.1.2

Subnet Mask 255.255.255.0


IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address /

Link Local Address: FE80::260:5CFF:FE4E:DB22

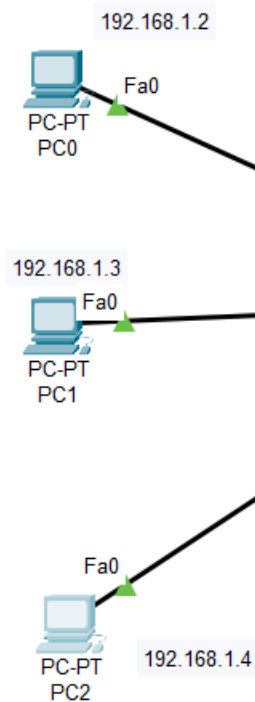

PC2

Physical Config Desktop Programming Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

Bluetooth

FastEthernet0

Port Status

Bandwidth

Duplex

MAC Address

0002.1762.C3C6

☒ On

☐ 100 Mbps ☐ 10 Mbps ☒ Auto

☐ Half Duplex ☒ Full Duplex ☒ Auto

IP Configuration

☐ DHCP

☒ Static

IPv4 Address

192.168.1.4

Subnet Mask

255.255.255.0


IPv6 Configuration


☐ Automatic

☒ Static

IPv6 Address

Link Local Address: FE80::202:17FF:FE62:C3C6

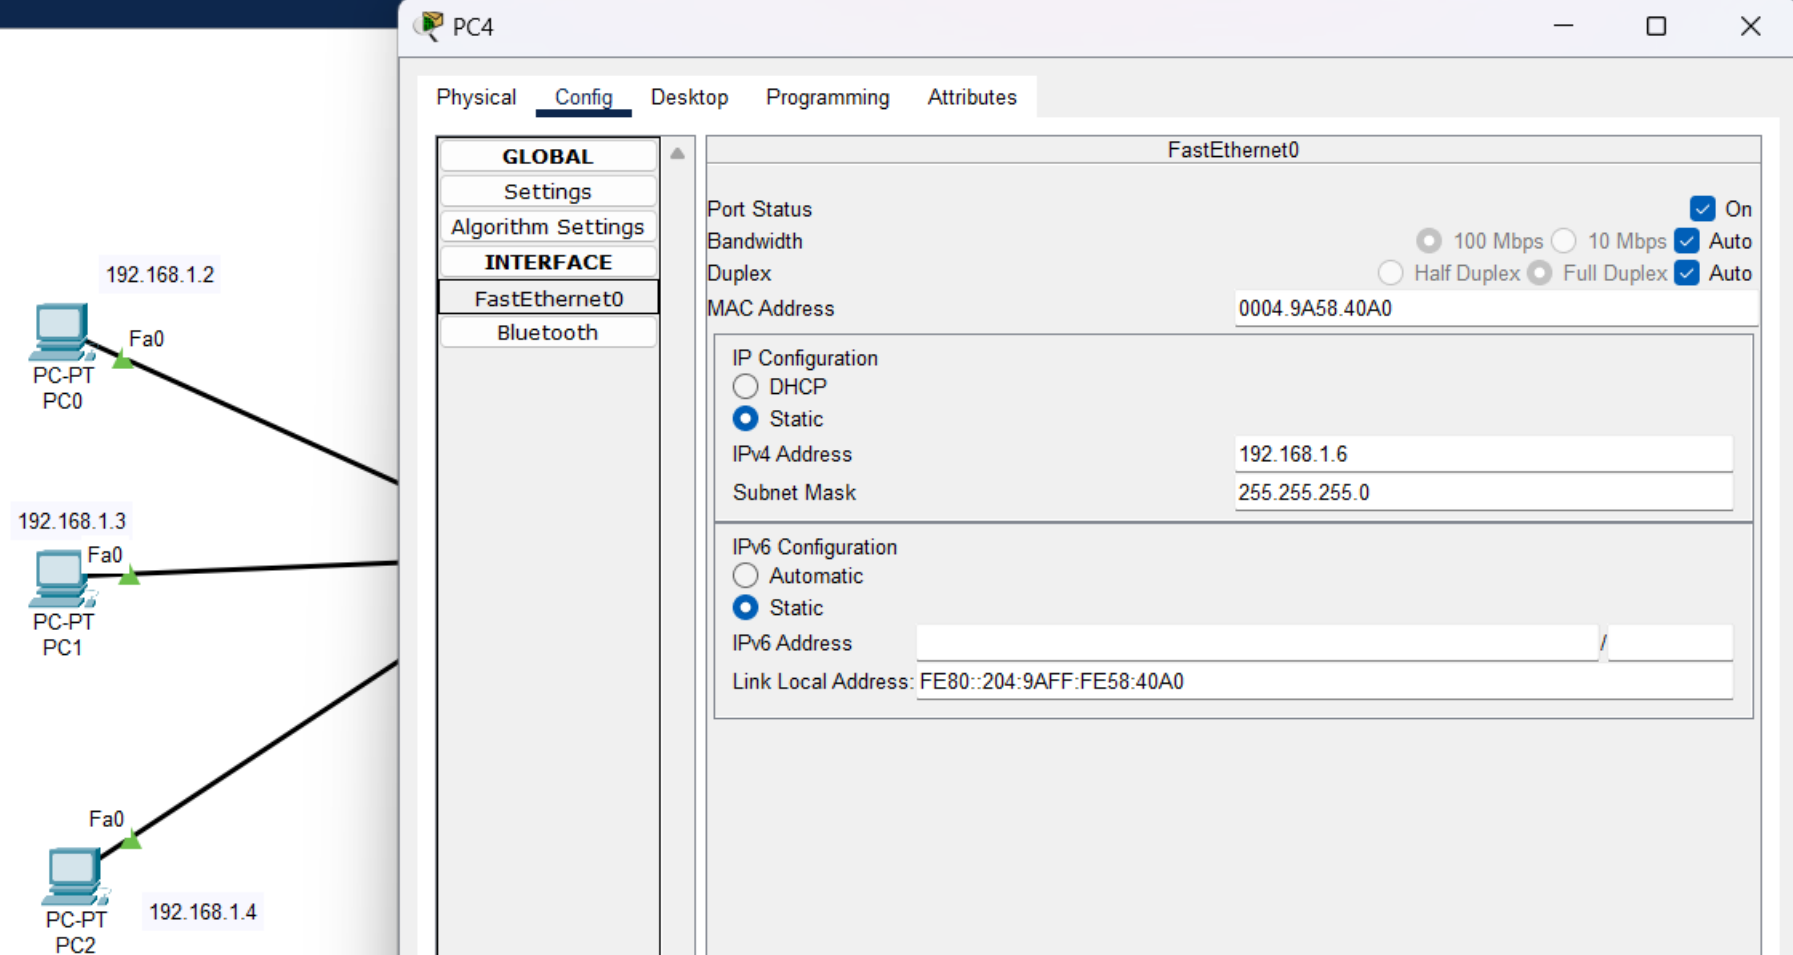

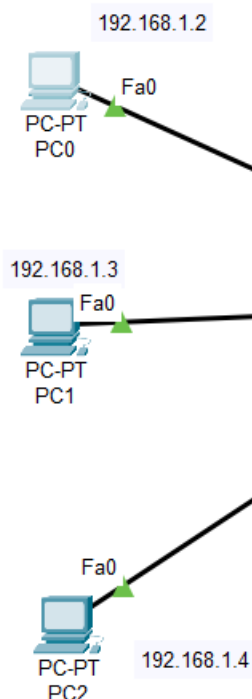

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.7

Pinging 192.168.1.7 with 32 bytes of data:

Reply from 192.168.1.7: bytes=32 time<1ms TTL=128
Reply from 192.168.1.7: bytes=32 time<1ms TTL=128
Reply from 192.168.1.7: bytes=32 time<1ms TTL=128
Reply from 192.168.1.7: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time=12ms TTL=128
Reply from 192.168.1.5: bytes=32 time=6ms TTL=128
Reply from 192.168.1.5: bytes=32 time=6ms TTL=128
Reply from 192.168.1.5: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 6ms, Maximum = 12ms, Average = 7ms


C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=8ms TTL=128
Reply from 192.168.1.4: bytes=32 time=4ms TTL=128
Reply from 192.168.1.4: bytes=32 time=4ms TTL=128
Reply from 192.168.1.4: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 4ms, Maximum = 8ms, Average = 5ms

C:\>|
```

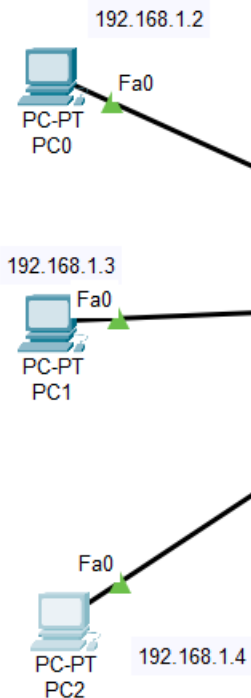

PC2

Physical Config Desktop Programming Attributes

Command Prompt

X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.6

Pinging 192.168.1.6 with 32 bytes of data:

Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

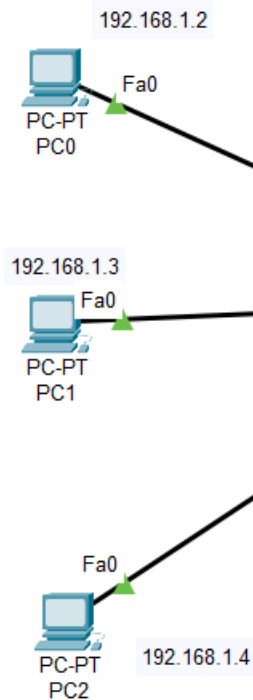

PC4

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.7

Pinging 192.168.1.7 with 32 bytes of data:

Reply from 192.168.1.7: bytes=32 time<1ms TTL=128
Reply from 192.168.1.7: bytes=32 time<1ms TTL=128
Reply from 192.168.1.7: bytes=32 time<1ms TTL=128
Reply from 192.168.1.7: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Delete