

1. ^{ROHS} THE PCB SHALL BE COMPLIANT WITH THE EU ROHS2 DIRECTIVE 2011/65/EU. THIS SHALL INCLUDE, AT A MINIMUM, ALL THE CONSTITUENT MATERIALS AND ANY OTHER ADDITIVES THAT MAY BE INCLUDED OR TRANSFERRED INTO THE FINAL PRODUCT DURING THE MANUFACTURING PROCESS. THE SUPPLIER OF THIS PCB SHALL BE ABLE TO PROVIDE DOCUMENTATION UPON REQUEST DEMONSTRATING COMPLIANCE TO THE DIRECTIVE.

2. FLAMMABILITY
THE PCB MATERIALS AND CONSTRUCTION MUST MEET UL94V-0.

3. MATERIALS
SEE THE BOARD STACKUP TABLE FOR DETAILS.
FINISHED PCB THICKNESS TO BE WITHIN $\pm 10\%$ OF THE TOTAL OF THE STACKUP
TABLE.

4. IMPEDANCE CONTROL
NOT REQUIRED.

5. PLATING
COPPER THICKNESSES STATED IN STACKUP TABLE ARE FINISHED PLATED WEIGHTS.
HOLES TO BE PLATED THRU 0.025 MM MINIMUM COPPER. ALL VIAS TO BE RESIN FILLED
& PLATED SHUT.

6. LINE THICKNESS
FINISHED LINE THICKNESS TO BE WITHIN +/- 10% OF GERBER DATA.

7. DRILLING
SEE DRILL TABLE. SIZES SHOWN ARE FINISHED HOLE SIZES.
MINIMUM ANNULAR RING REQUIREMENT IS 0.05 MM.
DRILL HOLE TANGENCY IS ACCEPTABLE BUT HOLE BREAK OUT SHALL NOT BE
ACCEPTABLE.
HOLE LOCATION AND TOLERANCES ARE TO BE ± 0.076 MM FROM DATUM (0.0-0.0).

8. QUALITY
BOARDS SHALL BE ACCEPTABLE AND REJECTABLE PER IPC-A-600 CLASS 2.

9. SOLDER MASK
CONSTRUCTION TO BE SOLDERMASK OVER BARE COPPER (SMOBC), USING LIQUID
PHOTO-IMAGEABLE (LPI) SOLDERMASK TO MEET QUALIFICATIONS OF IPC-SM-840.
SOLDER MASK TO BE GREEN UNLESS OTHERWISE SPECIFIED ON PO.

10. SILKSCREEN LEGEND
WHITE.

11. FINISH
IMMERSION GOLD OVER ELECTROLESS NICKEL (ENIG).
COVERAGE AND SOLDERABILITY SHALL MEET IPC-4552.

12. MARKING
UL LOGO, UL94 V-0 TEXT, MANUFACTURER CODE AND DATE LEGEND TO BE ADDED IN
POSITION INDICATED.


13. ROUTING
PCB WILL HAVE ROUTED EDGE; V-SCORING NOT ALLOWED.
MINIMUM ROUTING RADIUS TO BE 0.75 MM.
BOARD ROUTING TOLERANCE TO BE +/- 0.2 MM.

14. ELECTRICAL TESTING
BARE BOARDS SHALL BE 100% ELECTRICAL TESTED FOR RESISTANCE AT 100 VOLTS MINIMUM, AND FOR AND CONTINUITY USING GERBER GENERATED NET LIST DATA.
BBT (BARE BOARD TESTED) TO BE ADDED BY THE MANUFACTURER IN AREA INDICATED TO CERTIFY THAT THE BOARDS HAVE BEEN TESTED.

15. PACKAGING
BOARD TO BE VACUUM PACKED, SHIPPED AND IDENTIFIED WITH PART NUMBER, REVISION,
AND DATE CODE MARKED ON THE PACKAGING.

16. PANELISATION
PANEL SIZE, BOARDS PER PANEL AND TOOLING RAILS / HOLES TO BE SPECIFIED BY
PCB ASSEMBLER ON PURCHASE ORDER.

17. SOLDER PASTE STENCIL DATA
PLEASE SEND BACK TO US THE STEP AND REPEATED DATA FOR THE SOLDER PASTE
STENCIL.

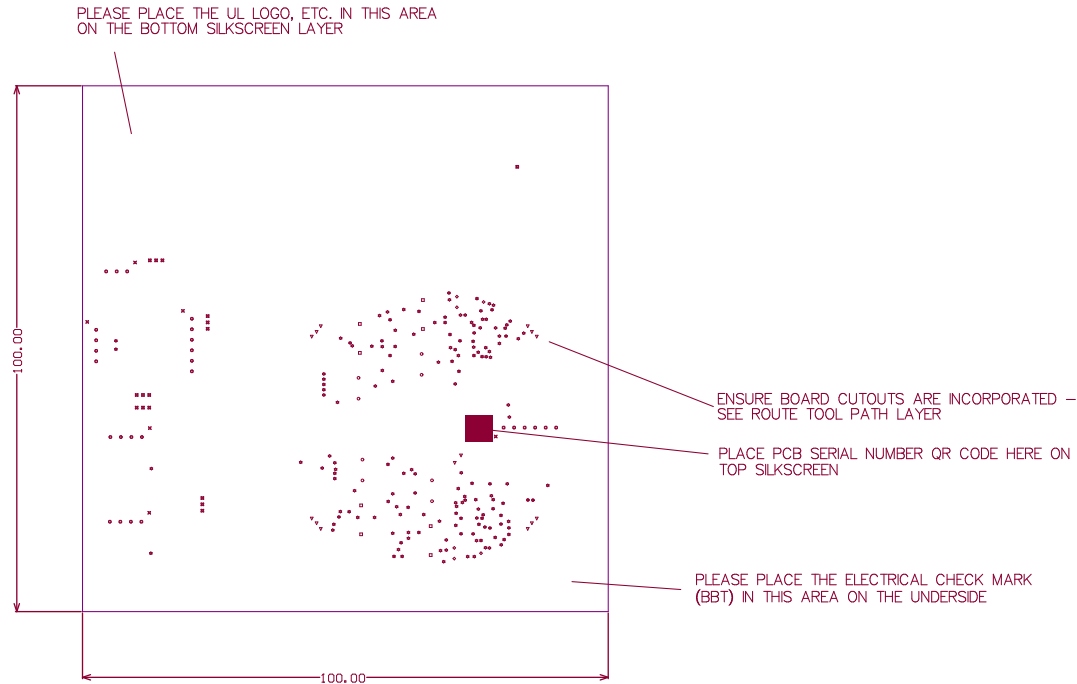

LAYER STACK TABLE FOR FINISHED BOARD THICKNESSES

Layer	Name	Material	Thickness	Constant	Board Layer Stack
	Top Overlay				
	Top Solder	Solder Resist	0.010mm	3.5	
	Top Surface Finish	Nickel, Gold	0.002mm		
1	Top Layer		0.070mm		
	Dielectric 2	3313wI	0.099mm	4.1	
2	GND (Top)	CF-004	0.015mm		
	Dielectric 4	Core-009	0.550mm	4.5	
3	X	CF-004	0.015mm		
	Dielectric 1	3313wI	0.099mm	4.8	
4	Y	CF-004	0.015mm		
	Dielectric 5	Core-009	0.550mm	4.5	
5	GND (Bot)	CF-004	0.015mm		
	Dielectric 3	3313wI	0.099mm	4.1	
6	Bottom Layer		0.070mm		
	Bottom Surface Finish	Nickel, Gold	0.002mm		
	Bottom Solder	Solder Resist	0.010mm	3.5	
	Bottom Overlay				

Total board thickness:	1.623mm
------------------------	---------

