Thermal-Headroom Routing for Efficient Robot Perception in Extreme Heat

Sparsh Roy*†‡, Kevin Zhou†, Arhaan Shah§, Shreyan Garg§,
Vihaan Joshi-Apte§, Maxim Kudryashov†, Nanda Cheruvanthala§
*Massachusetts Institute of Technology, Cambridge, MA, USA
†Hopewell Valley Central High School, Pennington, NJ, USA
§Paradise Valley High School, Phoenix, AZ, USA
‡Corresponding author: sparshr@mit.edu

***Abstract*—A robot working in a Phoenix summer runs its detector on a small embedded processor that heats itself. Once the chip reaches its thermal limit, the governor throttles it and every detector configuration slows down together. Adaptive inference routers pick a model size and input resolution per frame and react to latency, which in hot weather arrives after the router's own earlier choices have already heated the chip. We model this with an RC thermal plant wired in closed loop to a deadline-constrained router over four YOLO11 configurations, and propose Thermal-Headroom Routing (THR), which forecasts the chip temperature in closed form and skips configurations that would cross the throttle threshold. We test it on seven real traces with camera degradation, eight ambient temperatures and 20 seeds, with Holm correction across traces, against a latency-belief router, a fixed-threshold thermostat, duty caps tuned offline, and a control given THR's own heavy-model budget. With the deadline at the large model's median latency, THR never throttles and beats the belief router by 3.9 to 7.5 percentage points of deadline misses and 12 to 15% of energy per on-time frame on every trace. All temperature-aware policies, THR included, lie on one accuracy-timeliness curve set by the share of heavy-model frames, so a thermostat tuned for one chip matches THR. THR's distinct gain is robustness: when the chip runs 20% hotter than assumed, the thermostat throttles up to 29% of the time while THR stays at zero. When the deadline has 25% slack, throttling costs little and the belief router wins on on-time utility. Code and outputs are public.[1]**

***Index Terms*—efficient inference, adaptive model selection, thermal throttling, edge AI, robot perception, extreme environments**

1. Introduction

Consider a Jetson-class module in a sealed enclosure on a robot in the Sonoran Desert, with the air at 45 °C. If the perception stack runs its largest detector on every frame, the chip reaches its throttle limit in about a minute. The governor then down-clocks it, and the small models slow down along with the large one until the chip cools [1], [2]. In our simulations a policy that always runs the large model goes 12.5 s without an on-time detection at 45 °C and 91 s at 55 °C.

Adaptive inference is the usual answer to a tight latency budget. Early-exit networks and routers choose cheaper computation per input or per frame [3]–[5], and contention-aware detectors such as ApproxDet [6] also watch the load from co-located applications. These systems react to latency once it has risen. On a hot chip that signal arrives late, because the slowdown was caused by earlier choices and lasts tens of seconds. Thermal-aware DVFS [7] and thermal-aware multi-DNN scheduling on phones [8] address heat by controlling frequency or placement. We ask a narrower question that matters for robots with a fixed set of detector configurations: how should the router itself use temperature, and how much does a temperature forecast add over simpler rules? Belief-space perception routing [9], which this work extends, left thermal effects out of its contention model.

Our contributions: (i) a closed-loop model of thermal contention for adaptive inference, in which the router's configuration choice sets the power input to an RC thermal node with a hysteretic throttle (§3); (ii) THR, a closed-form rule that keeps the forecast temperature under the throttle limit at about 7 μs per frame (§4); (iii) an evaluation against baselines chosen to beat it: a thermostat, duty caps tuned offline, a matched-budget control in the spirit of the matched-input controls of [10], a deadline sweep, and five variations of the true chip, with 20 seeds and Holm correction (§6); and (iv) a clear account of where THR helps and where it does not. The gain over latency-only routing comes from rationing the heavy model, the forecast's own contribution is robustness to the chip's thermal parameters, and with deadline slack, throttling is cheaper than rationing.

2. Related Work

Adaptive and efficient inference. Early-exit networks [3], [4], dynamic transformers [5] and early exiting for driving [11]–[13] vary computation with the input. Modality gating [14]–[16] decides which sensors to process. ApproxDet [6] selects detection branches under a latency SLA using measured contention from co-located apps. In all of these

1. https://github.com/ImSpxrsh/thermal-headroom-routing

the compute budget is fixed or observed. None treats it as a state the policy's own choices drive.

Thermal behaviour of edge inference. On a Raspberry Pi, long CNN runs throttle within seconds without active cooling, and outdoor ambients from 22 to 36 °C change throughput by up to 27.7% [2]. A Jetson AGX Orin in an outdoor enclosure throttled under a synthetic stress test at a +40 °C setpoint (GPU 95.6 °C, CPU 99.0 °C), while a YOLOv8 workload drew about half the power and stayed below the threshold [17]. Throttling therefore depends on the model, the cooling and the duty cycle, which is why we sweep the plant parameters below. Measurements on phone SoCs show throttling dominating sustained performance [1].

Thermal management. HotSpot-style RC models [18] and temperature-aware MPSoC scheduling [19] predict hot spots and schedule around them. zTT [7] learns CPU/GPU frequency settings with reinforcement learning so that phones avoid throttling. Phoenix [8] combines processor placement with multi-exit networks to delay throttling for multi-DNN video apps. THR works one level up: it leaves the governor alone and chooses among detector configurations using a temperature forecast. It could run on top of a DVFS policy like zTT.

Sensor- and compute-aware routing. Belief-space perception routing [9] tracks blur, illumination and occlusion faults per camera with switching HMMs, keeps a latency-based contention belief, and fuses the two with a noisy-OR term. We reuse its fault beliefs, frontier and traces from TartanDrive [20], [21], RADIATE [22] and WoodScape [23].

3. System Model

Frontier and deadline. There are four configurations, from most to least expensive: C1 is YOLO11x at 1280 px, C2 is YOLO11x at 640, C3 is YOLO11n at 1280 and C4 is YOLO11n at 640, with per-frame latencies profiled under normal and contended compute [9]. The base deadline D is C1's median latency under normal compute, between 211 and 341 ms depending on the trace, so C1 meets D about half the time on a cool chip and C2 to C4 always meet it. Section 6.5 relaxes D to $1.25\times$ and $1.5\times$. Accuracy is the IoU-matched F1 agreement between a configuration's detections and C1's on the same frame. This pseudo-ground truth ranks configurations differently from real annotations [9], so accuracy and utility numbers are internal consistency checks. Miss, throttling and energy numbers do not depend on it.

Thermal plant. The SoC is one thermal node with time constant τ and junction-to-ambient resistance R_{th}:

$$T_{t+1} = T_t + \tfrac{\Delta t}{\tau}\big(T_{\mathrm{amb}} + R_{\mathrm{th}}\,P_t - T_t\big). \qquad (1)$$

Power depends on the configuration c_t served at frame t: $P_t = s_t\,[P_{\mathrm{idle}} + (P_{\max} - P_{\mathrm{idle}})\,u(c_t)]$, where $u(c) = \min(1, \tilde{\ell}_c/D_0)$ is the configuration's median normal-compute latency as a fraction of the base deadline D_0 (so a deadline sweep does not change power), and s_t is 0.6 while throttled and 1 otherwise. The governor starts throttling at $T \geq T_{\mathrm{hi}}$ and stops at $T \leq T_{\mathrm{lo}}$. While it throttles, every configuration's latency is drawn from its profiled contended distribution, whose p95 is about $2.5\times$ the normal one. Table 1 lists the parameters. They describe a sealed, sun-loaded enclosure running the large model continuously: running C1 nonstop settles at $T_{\mathrm{amb}} + 50$ °C, so throttling starts once the air is above 40 °C. This is harsher than the well-ventilated Orin with a lighter YOLOv8 model in [17], and we chose the values ourselves. Section 6.4 varies the true plant.

TABLE 1. THERMAL-PLANT PARAMETERS (FIXED BEFORE ANY RUN).

Δt (frame)	0.1 s	P_{idle} / $P_{\max}$	5 / 25 W
τ	30 s	T_{hi} / T_{lo}	90 / 85 °C
R_{th}	2.0 °C/W	throttled power	$0.6\times$

Closed loop. Whether the chip is throttled at frame t depends on what the router chose before t, so each policy runs in closed loop with the plant. For a given seed, all policies see the same pre-drawn latency samples (normal and contended), the same camera measurement noise and the same temperature-sensor noise.

4. Policies

All policies use the objective from [9]. They predict a compute state, keep the configurations whose median latency in that state meets D, and serve the one with the highest expected accuracy given the camera-fault belief b_f. A 10-frame dwell keeps them from switching back and forth.

Online compute belief. In closed loop the router learns only the latency of the configuration it served, one frame later. A two-state forward filter (stay probabilities 0.95 and 0.90) runs on one binary observation, whether that latency exceeded $1.5\times$ the configuration's normal median, and outputs b_c.

THR. With the on-die reading $\hat{T}$ ($\sigma = 1$ °C noise), holding configuration c for H frames gives, from Eq. (1),

$$\hat{T}_H(c) = T_\infty(c) + \big(\hat{T} - T_\infty(c)\big)\big(1 - \tfrac{\Delta t}{\tau}\big)^H, \qquad (2)$$

with $T_\infty(c) = T_{\mathrm{amb}} + R_{\mathrm{th}}P(c)$. THR drops c when $\hat{T}_H(c) \geq T_{\mathrm{hi}} - m$, with $H = 50$ frames (5 s) and $m = 2$ °C. C4 is always allowed. Each frame costs four evaluations of Eq. (2); with the belief update and selection we measured 7.3 μs per frame in Python on one Apple M5 core, under 0.004% of one C1 inference.

Baselines. Static C1 and Static C4 always serve one configuration. Reactive uses latency only. Belief is the decoupled router of [9] with the online b_c. Thermostat is Belief with C1 barred whenever $\hat{T} \geq 88$ °C, the same line THR forecasts against, so the two differ only in forecasting. Cap (45 °C) and Cap (55 °C) are Belief with a running cap on the share of C1 frames, set to the share THR used at that ambient. They stand for a duty cap tuned once in the lab. Matched budget gets THR's own C1 share for each seed and ambient, which tests whether THR helps by timing its C1 frames or only by using fewer of them. For heat combined with camera faults, Joint adds the noisy-OR fault-coupling

term of [9], $p_{\mathrm{cont}} = 1 - (1 - b_c)(1 - \kappa b_f)$, and Joint + THR combines it with THR.

5. Experimental Setup

Traces. Seven real traces with the frontiers and fault labels of [9]: the full TartanDrive trajectory, which has no camera faults and serves as a negative control, a 309-frame stretch of rough terrain, RADIATE rain, snow, fog and night, and WoodScape fisheye video with real soiling masks. Each trace is repeated to fill a 1200-frame mission (2 minutes at 10 Hz).

Experiments. E1 re-scores the original fault-coupled contention schedule for bursts of misses. E2 sweeps ambient temperature from 20 to 55 °C with thermal contention only. E3 adds fault-coupled contention on top of throttling. E4 gives THR a wrong R_{th} or τ. E5 relaxes the deadline. E6 changes the true chip. E7 and E8 vary THR's H and m and the thermostat threshold, as sensitivity analyses. E9 sweeps fixed C1 caps from 0.2 to 1.0.

Protocol. Following the validation-locked protocol of [10], every setting behind the headline numbers (plant parameters, H, m, dwell, the $1.5\times$ slow threshold, the 88 °C thermostat) was fixed in code before the first evaluation run, and each result file records `eval_labels_used_for_selection: false`. The caps tuned at 45 and 55 °C are fit on the evaluation seeds, which favours them. We use 20 seeds, which change latency draws, camera noise and temperature-sensor noise on the same real frames. Each comparison is a paired t-test on per-seed differences, and * marks a difference that survives Holm correction across the seven traces of its family at $\alpha = 0.05$.

6. Results

6.1. Cool air

From 20 to 35 °C no policy brings the chip to T_{hi}. THR, Belief, Reactive, Thermostat and Matched budget make the same choice on every frame and their miss rates differ by exactly 0.0 percentage points on all seven traces (Fig. 1). At 40 °C THR starts holding C1 back a little early (C1 on 93 to 94% of frames, agreement 0.97 to 1.00), because its 5 s forecast already crosses 88 °C.

6.2. Hot air, against latency-only routing

Table 2 lists miss rate, throttling, blackout length, power, energy and accuracy for every policy. Static C1 is throttled 20% of the time at 45 °C with a 12.5 s blackout, and 76% of the time at 55 °C with a 91 s blackout and 88% of deadlines missed. Belief and Reactive keep blackouts near 1 s but are throttled 11 to 13% of the mission at 45 °C and 32 to 38% at 55 °C, because they react after the governor has stepped in (Fig. 2).

THR was never throttled on any trace, seed or temperature. Against Belief it lowers the miss rate by 3.9 to 5.4 points at 45 °C and 6.7 to 7.5 at 55 °C, significant on every trace at both temperatures (Table 3). Energy per on-time frame falls by 12% at 45 °C and 13% at 55 °C, also on every trace. The price is accuracy: mean agreement at 45 °C drops from 0.975 to 0.950. On-time utility (accuracy if on time, else zero) still rises significantly on 5 of 7 traces at 45 °C and 6 of 7 at 55 °C. Static C4 beats every policy on timing and energy at an agreement of 0.695.

TABLE 2. EFFICIENCY, QUALITY AND COST IN E2 (BASE DEADLINE), MEAN OVER 7 TRACES AND 20 SEEDS. MISS AND THR. (THROTTLED) IN %. BLACKOUT IS THE LONGEST RUN OF CONSECUTIVE MISSES (S). P IS MEAN SOC POWER (W) AND E_{ot} IS ENERGY PER ON-TIME FRAME (J). ACC. IS PSEUDO-GT AGREEMENT.

Policy	Miss	Thr.	Blackout	P	E_{ot}	Acc.
Ambient 45 °C						
Static C1	60.3	20.3	12.5	23.0	5.79	1.000
Static C4	0.0	0.0	0.0	5.6	0.56	0.695
Reactive	44.2	12.4	0.9	22.6	4.06	0.975
Belief	44.3	12.2	0.9	22.6	4.07	0.975
Thermostat	41.2	0.0	0.9	22.2	3.79	0.958
Cap (45 °C)	39.5	0.0	0.9	21.9	3.62	0.946
Cap (55 °C)	25.1	0.0	0.7	17.6	2.36	0.879
Matched budget	39.6	0.0	0.9	21.9	3.63	0.948
THR (ours)	39.6	0.0	0.9	21.7	3.60	0.950
Ambient 55 °C						
Static C1	87.7	75.5	90.7	17.4	14.22	1.000
Static C4	0.0	0.0	0.0	5.6	0.56	0.695
Reactive	32.0	37.3	0.9	17.9	2.63	0.927
Belief	32.3	36.3	0.9	17.9	2.64	0.929
Thermostat	29.0	0.0	0.8	18.4	2.59	0.899
Cap (45 °C)	31.2	31.0	0.9	17.9	2.60	0.902
Cap (55 °C)	24.9	3.9	0.7	17.4	2.31	0.877
Matched budget	24.9	3.7	0.7	17.4	2.31	0.878
THR (ours)	25.1	0.0	0.8	17.2	2.30	0.883

6.3. Simple temperature rules and the trade-off curve

A thermostat at 88 °C also never throttles. THR misses 1.3 to 1.9 points fewer deadlines than it at 45 °C and 2.9 to 4.4 at 55 °C (all seven traces), and has higher on-time utility on 6 and 7 traces, while the thermostat keeps 0.8 to 1.6 points more accuracy. The thermostat threshold is a dial, though. Sweeping it from 84 to 89 °C (E8) traces an accuracy-timeliness curve, and THR lands on that curve, between the 86 and 87 °C settings at 45 °C and at the 85 °C setting at 55 °C. Fig. 3 shows the same thing for duty caps: every temperature-aware policy sits on the curve traced by fixed C1 caps, and the matched-budget control, which spends THR's C1 share with no temperature input, matches THR's miss rate on 6 of 7 traces at 55 °C and all 7 at 45 °C. At a single ambient and on the assumed chip, the share of C1 frames determines the outcome, and the forecast adds little beyond choosing that share well.

Choosing it well across temperatures is harder than it looks. A cap tuned at 45 °C matches THR at 45 °C, then throttles 16% of the mission at 50 °C and 31% at 55 °C, where THR misses 3.1 to 6.6 points fewer deadlines on every trace (Table 4). Below 45 °C the same cap gives up

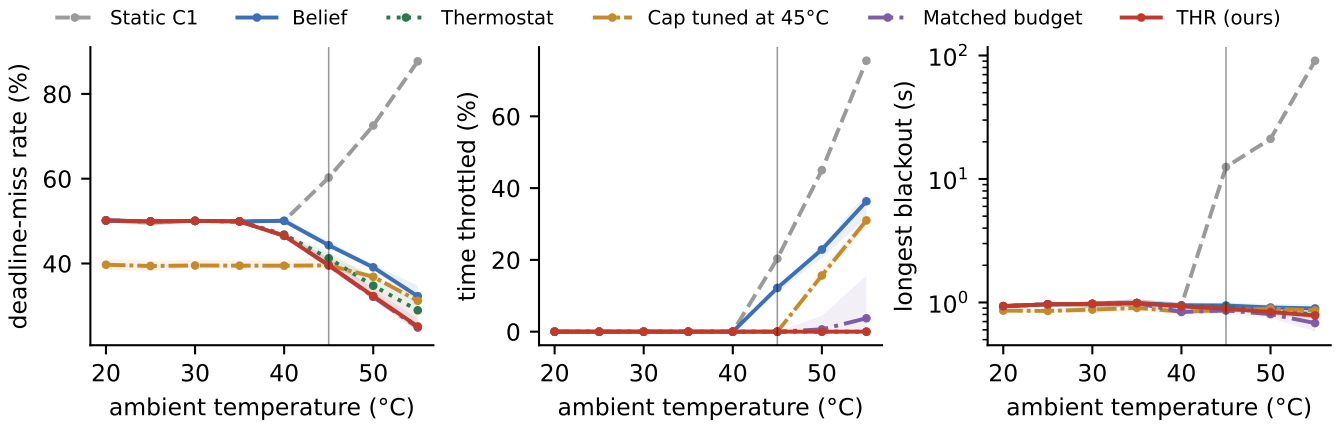


Figure 1. Ambient sweep (E2), base deadline. Lines are the mean over seven traces; bands span the lowest and highest trace. Left: deadline-miss rate. Middle: share of the mission throttled. Right: longest run of consecutive misses (log scale). THR (red) and the thermostat never throttle. The cap tuned at 45 °C wastes accuracy below 45 °C (lower miss, Table 4) and throttles above it.

TABLE 3. HEAT REGIME (E2) PER TRACE, BASE DEADLINE. BLACKOUT C1 IS STATIC C1'S LONGEST RUN OF CONSECUTIVE MISSES (S). THR. IS THE % OF THE MISSION THROTTLED. Δ THR IS THE REDUCTION IN MISS RATE RELATIVE TO BELIEF (PP). THR−TST AND THR−MB ARE THR'S MISS-RATE ADVANTAGE OVER THE 88 °C THERMOSTAT AND THE MATCHED-BUDGET CONTROL (POSITIVE MEANS THR MISSES LESS). *: HOLM-SIGNIFICANT ACROSS THE SEVEN TRACES.

	Ambient 45 °C						Ambient 55 °C					
Trace	Blackout C1	Thr. Belief	Thr. THR	Δ THR	THR−Tst	THR−MB	Blackout C1	Thr. Belief	Thr. THR	Δ THR	THR−Tst	THR−MB
Off-road (clean)	12.5	13	0	+4.9*	+1.6*	+0.2	90.7	38	0	+7.2*	+3.9*	-0.1
Off-road seg.	12.5	12	0	+4.8*	+1.6*	-0.2	90.7	37	0	+6.8*	+3.8*	-0.3
Rain	12.5	13	0	+4.4*	+1.9*	-0.1	90.8	36	0	+7.1*	+3.7*	-0.3
Snow	12.5	12	0	+5.4*	+1.7*	+0.1	90.7	38	0	+7.2*	+4.1*	-0.1
Fog	12.4	11	0	+4.8*	+1.9*	+0.0	90.7	34	0	+7.5*	+3.8*	+0.0
Night	12.6	13	0	+5.0*	+1.5*	+0.1	90.7	38	0	+7.3*	+4.4*	-0.0
Soiling (fisheye)	12.5	11	0	+3.9*	+1.3*	-0.1	90.7	32	0	+6.7*	+2.9*	-1.1*

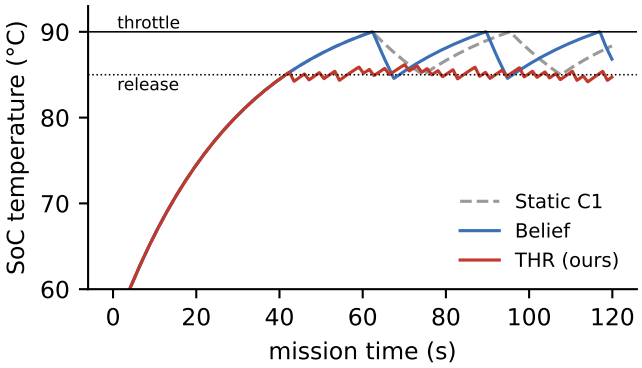


Figure 2. SoC temperature during one 2-minute mission at 45 °C (fog trace, seed 0). Static C1 and Belief go through repeated throttle cycles. THR alternates C1 and C2 and stays just below the release threshold.

3.6 to 5.4 points of accuracy that THR keeps. A cap tuned at 55 °C costs 7.1 points of accuracy at 45 °C and 12.1 at 35 °C. The matched budget also needed THR to supply its number, and at 55 °C it still throttled up to 15.7% of the mission on three traces.

TABLE 4. A C1 CAP TUNED ONCE AT 45 °C AGAINST THR AT OTHER AMBIENTS (MEAN OVER TRACES). THR. AND MISS IN %.

	Cap tuned at 45 °C			THR		
Ambient	Thr.	Miss	Acc.	Thr.	Miss	Acc.
35 °C	0.0	39.5	0.946	0.0	49.9	1.000
40 °C	0.0	39.5	0.946	0.0	46.5	0.982
45 °C	0.0	39.5	0.946	0.0	39.6	0.950
50 °C	15.6	36.9	0.930	0.0	32.3	0.914
55 °C	31.0	31.2	0.902	0.0	25.1	0.883

6.4. A different chip

The thermostat's threshold and the caps were set for one plant. In E6 the true chip differs from Table 1 and THR is given the matching model, as if the chip had been characterized (Table 5). THR stayed at 0.0% throttling on all five variants, both temperatures and every trace. The 88 °C thermostat throttled up to 29.0% of the mission at 55 °C when R_{th} was 20% higher, and up to 2.7% when the chip heated twice as fast ($\tau \times 0.5$). It reacts to the current reading, and a chip that overshoots after the reading crosses 88 °C reaches 90 °C anyway. THR looks 5 s ahead and sees the overshoot coming. THR's miss reduction over Belief

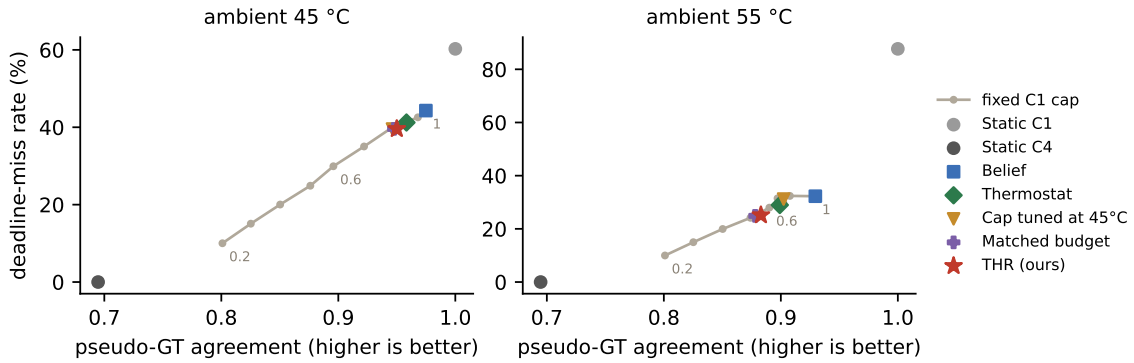


Figure 3. Accuracy against deadline-miss rate (E2 and E9), mean over seven traces. The grey line is a fixed C1 cap from 0.2 to 1.0. Every temperature-aware policy lies on it; Belief sits off the curve at 55 °C because throttling raises its miss rate.

was significant on all seven traces in every variant except the cooler chip at 45 °C, where nothing throttled and the difference was exactly zero. On the slow-heating chip ($\tau \times 2$) at 45 °C Belief never throttled within the two minutes, so THR's 3.7 to 4.4 point gain there comes from rationing C1 alone.

6.5. When the deadline has slack

With D at C1's median, C1 misses about half its frames even on a cool chip, so part of every policy's miss reduction comes from running C1 less. E5 removes that effect (Table 6). At $1.25\times$ and $1.5\times$ the median, C1 meets the deadline on a cool chip and only throttling causes misses. Belief then misses just 0.5% of frames at 45 °C and 1.0% at 55 °C, even though it is throttled 12 and 36% of the time, because C2 to C4 still finish in time on a slow chip and Belief moves to them after one slow frame. THR's miss rate is 0.0%, a small but significant difference on every trace. On-time utility goes the other way: Belief is significantly better on 6 of 7 traces (0.970 against 0.950 at 45 °C), since THR's rationing of C1 costs more accuracy than throttling does. THR still uses 5% less energy per on-time frame (2.17 against 2.28 J at 45 °C). With deadline slack, THR is worth running only when throttling has costs outside this metric, such as energy, a planner sharing the SoC, or wear.

6.6. Heat combined with camera faults

E3 adds fault-coupled contention on top of throttling (Fig. 4, Table 7). The fault-coupling term and THR respond to different causes. On the fault-free trajectory Joint gains exactly 0.0 points, while THR gains 6.0 points at 45 °C and 7.9 at 55 °C. At 25 °C THR adds nothing and Joint + THR equals Joint exactly. At 45 and 55 °C Joint + THR beats Belief on all seven traces, by 5.8 to 13.1 and 7.3 to 13.3 points, and is never below Joint alone.

6.7. THR's settings and a wrong model

Because THR forecasts from the measured temperature, no setting we tried brought throttling back in a meaningful way. Over $H \in \{20, 50, 100\}$ frames and $m \in \{0, 2, 4\}$ °C (E7), throttling stayed at 0.0% except for the most aggressive setting ($H = 20$, $m = 0$) at 55 °C, which throttled up to 0.6% of the mission. Longer horizons and larger margins move THR down the same curve: at 45 °C the miss reduction over Belief ranges from 0.5 to 11.0 points and mean agreement from 0.969 to 0.923, significant on all traces at every setting. A wrong thermal model has the same effect (E4, Table 8). Underestimating R_{th} by 30% shrinks the miss gain to 0.8 to 1.8 points and keeps more accuracy, and overestimating it does the opposite. THR has one dial that matters, its effective conservatism, and getting the model roughly right is enough to keep the chip out of throttling.

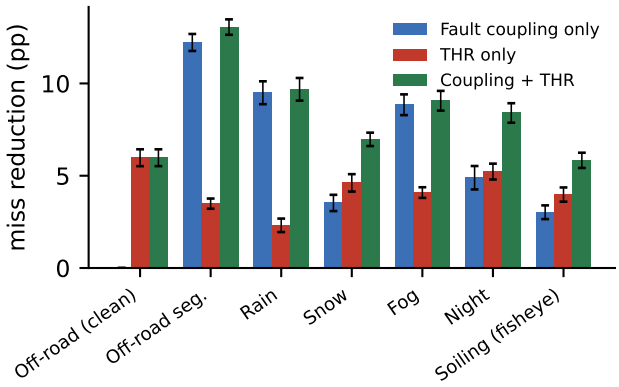


Figure 4. Heat plus fault-coupled contention at 45 °C (E3): reduction in miss rate relative to Belief, 95% CIs over 20 seeds.

6.8. Bursts of misses under fault-coupled contention

Re-scoring the original fault-coupled schedule of [9] (E1, Table 9), fault coupling lowers the share of frames inside bursts of three or more misses (0.3 s) on 6 of 7 traces, by 0.6 to 5.6 points, and is exactly zero on the clean trajectory. It shortens the single longest burst significantly on only one trace.

TABLE 5. A DIFFERENT TRUE CHIP (E6). THR USES THE MATCHING MODEL. Δ THR: REDUCTION IN MISS RATE RELATIVE TO BELIEF (PP, RANGE OVER TRACES) AND HOLM-SIGNIFICANT TRACES. MAX THR.: LARGEST THROTTLED SHARE OVER TRACES (%) FOR BELIEF, THE 88 °C THERMOSTAT AND THR.

	Ambient 45 °C					Ambient 55 °C				
True chip	Δ THR	Sig.	Belief	Tst.	THR	Δ THR	Sig.	Belief	Tst.	THR
$R_{\mathrm{th}} \times 0.8$	+0.0 to +0.0	0/7	0.0	0.0	0.0	+4.7 to +6.1	7/7	17.0	0.0	0.0
$R_{\mathrm{th}} \times 1.2$	+6.7 to +7.9	7/7	28.4	0.0	0.0	+8.2 to +12.1	7/7	51.8	29.0	0.0
$\tau \times 0.5$	+7.9 to +9.6	7/7	15.8	0.0	0.0	+11.0 to +14.7	7/7	42.3	2.7	0.0
$\tau \times 2$	+3.7 to +4.4	7/7	0.0	0.0	0.0	+4.8 to +5.6	7/7	25.5	0.0	0.0
throttle power $0.8\times$	+3.4 to +5.3	7/7	12.8	0.0	0.0	+4.8 to +6.7	7/7	41.0	0.0	0.0

TABLE 6. DEADLINE SWEEP (E5): MEANS OVER 7 TRACES FOR BELIEF (B), THE 88 °C THERMOSTAT (TST) AND THR. U IS ON-TIME UTILITY. THE LAST TWO COLUMNS COUNT TRACES WHERE THR IS HOLM-SIGNIFICANTLY BETTER / WORSE THAN BELIEF ON MISS RATE AND ON U.

		Miss (%)			Throttled (%)			U			THR vs B	
D	Amb.	B	Tst	THR	B	Tst	THR	B	Tst	THR	miss	U
$1.0\times$	35 °C	49.9	49.9	49.9	0.0	0.0	0.0	0.501	0.501	0.501	0/0	0/0
	45 °C	44.3	41.2	39.6	12.2	0.0	0.0	0.532	0.546	0.554	7/0	5/0
	55 °C	32.3	29.0	25.1	36.3	0.0	0.0	0.607	0.610	0.632	7/0	6/0
$1.25\times$	35 °C	0.0	0.0	0.0	0.0	0.0	0.0	1.000	1.000	1.000	0/0	0/0
	45 °C	0.5	0.0	0.0	12.2	0.0	0.0	0.970	0.958	0.950	7/0	1/6
	55 °C	1.0	0.0	0.0	36.3	0.0	0.0	0.919	0.899	0.883	7/0	1/6
$1.5\times$	35 °C	0.0	0.0	0.0	0.0	0.0	0.0	1.000	1.000	1.000	0/0	0/0
	45 °C	0.5	0.0	0.0	12.2	0.0	0.0	0.970	0.958	0.950	7/0	1/6
	55 °C	1.0	0.0	0.0	36.3	0.0	0.0	0.919	0.899	0.883	7/0	1/6

TABLE 7. E3: REDUCTION IN MISS RATE RELATIVE TO BELIEF (PP). J IS JOINT; J+T IS JOINT + THR. *: HOLM-SIGNIFICANT.

	25 °C		45 °C		55 °C	
Trace	J	J+T	J	J+T	J	J+T
Off-road (clean)	+0.0	+0.0	+0.0	+6.0*	+0.0	+7.9*
Off-road seg.	+12.7*	+12.7*	+12.2*	+13.1*	+9.0*	+13.3*
Rain	+9.7*	+9.7*	+9.5*	+9.7*	+5.8*	+10.1*
Snow	+5.3*	+5.3*	+3.5*	+7.0*	+1.6*	+8.8*
Fog	+12.5*	+12.5*	+8.8*	+9.1*	+3.4*	+9.2*
Night	+8.0*	+8.0*	+4.9*	+8.4*	+2.4*	+9.6*
Soiling (fisheye)	+4.7*	+4.7*	+3.0*	+5.8*	+1.1*	+7.3*

TABLE 8. THR WITH A WRONG THERMAL MODEL AT 45 °C (E4): RANGE OF THE MISS REDUCTION RELATIVE TO BELIEF, HOLM-SIGNIFICANT TRACES, ACCURACY RANGE AND THE LARGEST THROTTLED SHARE.

THR's model	Δ miss (pp)	Sig.	Acc.	Max thr. (%)
true model	+3.9 to +5.4	7/7	0.917 to 0.994	0.0
$R_{\mathrm{th}} \times 0.7$	+0.8 to +1.8	7/7	0.943 to 0.996	0.0
$R_{\mathrm{th}} \times 1.3$	+7.1 to +9.0	7/7	0.888 to 0.993	0.0
$\tau \times 0.5$	+5.6 to +7.6	7/7	0.899 to 0.994	0.0
$\tau \times 2$	+3.2 to +4.4	7/7	0.925 to 0.995	0.0

TABLE 9. BURSTS UNDER FAULT-COUPLED CONTENTION (E1). BURST SHARE: % OF FRAMES IN RUNS OF AT LEAST 3 MISSES. MAX RUN IN FRAMES.

	Burst share (%)			Max run	
Trace	Belief	Joint	Δ (pp)	Belief	Joint
Off-road (clean)	18.9	18.9	+0.0	7.6	7.6
Off-road seg.	17.4	14.7	+2.8*	8.4	7.3
Rain	14.3	13.7	+0.6*	6.7	6.7
Snow	20.0	17.4	+2.6*	7.6	7.3
Fog	21.9	16.3	+5.6*	7.1	6.8
Night	19.7	16.9	+2.8*	7.8	7.2
Soiling (fisheye)	14.6	13.6	+1.0*	10.6	10.5

7. Discussion and Limitations

Three findings hold across every check we ran. Reading the temperature is what keeps a router out of throttling; routers that only watch latency cannot avoid it. At one ambient on a known chip, the share of heavy-model frames sets the accuracy-timeliness point, and a thermostat or duty cap at the right setting performs as well as THR. A forecast keeps that setting right when the ambient changes and when the chip heats faster or settles hotter than expected, where the thermostat and fixed caps throttle. We therefore claim robustness for THR, and do not claim that it beats a well-tuned rule on a well-characterized chip.

The deadline matters as much as the temperature. With the deadline at the large model's median latency, avoiding throttling reduces misses and energy. With 25% slack, the cheaper models absorb throttling, and a latency-only router delivers more on-time accuracy than THR. Deployments should check which side of that line they are on.

The study is a simulation built on real camera traces and real profiled latencies. The plant is one RC node with parameters we chose, and throttling reuses the profiled contended latency distribution instead of real DVFS states. The real throttle points reported for the Jetson AGX Orin

are higher (95.6 and 99.0 °C [17]), and a lighter model in a ventilated enclosure did not throttle at 40 °C. Our plant variations cover part of that range, but only hardware measurements can settle it. Latencies come from an Apple M5 GPU. Traces are repeated to reach mission length. Accuracy is agreement with the largest model, which tracks real annotations poorly [9]. Seeds change noise on fixed frames and do not stand in for independent missions.

Next we plan to measure R_{th}, τ and throttle behaviour on a Jetson Orin in an environmental chamber from 25 to 55 °C with the included `tegrastats` harness, score the routers against real annotations, and test whether a duty budget learned online from temperature logs can replace the RC model.

8. Conclusion

On a hot robot, choosing the large detector now can cause throttling a minute later. THR gives the router a closed-form temperature forecast that costs microseconds per frame. With a tight deadline it kept the chip out of throttling on all seven traces at 45 and 55 °C and cut deadline misses by 3.9 to 7.5 percentage points and energy per on-time frame by 12 to 13% relative to latency-only routing. A tuned thermostat reaches the same operating points on the chip it was tuned for, but throttled for up to 29% of the mission on a chip 20% hotter than assumed, where THR stayed at zero. With deadline slack, throttling is cheap and THR's rationing is not worth its accuracy cost. For teams building perception on hot hardware, the practical advice is to give the router a temperature input, and to use a forecast when the chip's thermal behaviour is uncertain.

Acknowledgment

This work builds on the code and traces of belief-space perception routing [9]. We thank Vihan Aggarwal and Davin Yin for that work.

References

[1] G. Bhat, S. Gumussoy, and U. Y. Ogras, "Power and thermal analysis of commercial mobile platforms: Experiments and case studies," in *Proc. Design, Automation and Test in Europe (DATE)*, 2019.

[2] T. Benoit-Cattin, D. Velasco-Montero, and J. Fernández-Berni, "Impact of thermal throttling on long-term visual inference in a CPU-based edge device," arXiv:2010.06291 [cs.CV], 2020.

[3] S. Teerapittayanon, B. McDanel, and H. T. Kung, "BranchyNet: Fast inference via early exiting from deep neural networks," in *Proc. Int. Conf. Pattern Recognition (ICPR)*, 2016.

[4] S. Laskaridis, A. Kouris, and N. D. Lane, "Adaptive inference through early-exit networks: Design, challenges and directions," in *Proc. Int. Workshop on Embedded and Mobile Deep Learning (EMDL)*, 2021.

[5] Y. Wang, R. Huang, S. Song, Z. Huang, and G. Huang, "Not all images are worth 16×16 words: Dynamic transformers for efficient image recognition," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.

[6] R. Xu, C.-l. Zhang, P. Wang, J. Lee, S. Mitra, S. Chaterji, Y. Li, and S. Bagchi, "ApproxDet: Content and contention-aware approximate object detection for mobiles," in *Proc. 18th ACM Conf. Embedded Networked Sensor Systems (SenSys)*, 2020.

[7] S. Kim, K. Bin, S. Ha, K. Lee, and S. Chong, "zTT: Learning-based DVFS with zero thermal throttling for mobile devices," in *Proc. 19th Annu. Int. Conf. Mobile Systems, Applications, and Services (MobiSys)*, 2021, pp. 41–53.

[8] S. Jeon, J. Kim, J. Lee, and H. Cha, "Phoenix: Thermal-aware on-device inference of multi-instance DNNs for mobile video applications," *ACM Trans. Embedded Computing Systems*, vol. 25, no. 2, pp. 31:1–31:23, 2026.

[9] S. Roy, V. Aggarwal, and D. Yin, "Belief-space perception routing under coupled sensor faults and compute contention," arXiv:2608.00322 [cs.RO], 2026.

[10] K. Zhou and S. Roy, "Matched-input estimates differ in sign across architectures: Auditing EEG foundation models on motor imagery," arXiv:2609.23924 [cs.LG], 2026.

[11] L. Huang, H. Hu, Y. Cui, J. Zuo, S. Wu, N. Guan, and C. J. Xue, "AD-EE: Early exiting for fast and reliable vision-language models in autonomous driving," *arXiv preprint arXiv:2506.05404*, 2025.

[12] H. Hu *et al.*, "Nav-EE: Navigation-guided early exiting for efficient vision-language models in autonomous driving," *arXiv preprint arXiv:2510.01795*, 2025.

[13] M. Sponner, J. Ott, L. Servadei, B. Waschneck, R. Wille, and A. Kumar, "Temporal patience: Efficient adaptive deep learning for embedded radar data processing," *arXiv preprint arXiv:2309.05686*, 2023.

[14] Z. Xue and R. Marculescu, "Dynamic multimodal fusion," in *Proc. IEEE/CVF Conf. Computer Vision and Pattern Recognition Workshops (CVPRW)*, 2023.

[15] O. Mees, A. Eitel, and W. Burgard, "Choosing smartly: Adaptive multimodal fusion for object detection in changing environments," in *Proc. IEEE/RSJ Int. Conf. Intelligent Robots and Systems (IROS)*, 2016.

[16] Y. Zhang, X. Zhang, S. Zhao, Y. Song, C. Wu, N. Petrovic, and A. Knoll, "PRAM-R: A perception-reasoning-action-memory framework with llm-guided modality routing for adaptive autonomous driving," *arXiv preprint arXiv:2603.04222*, 2026.

[17] R. Krišlauks, D. Tiscenko, V. Medvedevs, J. Ormanis, and J. Judvaitis, "Ambient temperature impact on the thermal behavior and power consumption of the NVIDIA Jetson AGX Orin in an outdoor enclosure," *Electronics*, vol. 15, no. 11, p. 2467, 2026.

[18] K. Skadron, M. R. Stan, W. Huang, S. Velusamy, K. Sankaranarayanan, and D. Tarjan, "Temperature-aware microarchitecture," in *Proc. Int. Symp. Computer Architecture (ISCA)*, 2003.

[19] A. K. Coskun, T. S. Rosing, and K. Whisnant, "Temperature aware task scheduling in MPSoCs," in *Proc. Design, Automation and Test in Europe (DATE)*, 2007.

[20] S. Triest, M. Sivaprakasam, S. J. Wang, W. Wang, A. M. Johnson, and S. Scherer, "TartanDrive: A large-scale dataset for learning off-road dynamics models," in *Proc. IEEE Int. Conf. Robotics and Automation (ICRA)*, 2022, pp. 2546–2552.

[21] M. Sivaprakasam, S. Triest, M. G. Castro *et al.*, "TartanDrive 2.0: More modalities and better infrastructure to further self-supervised learning research in off-road driving tasks," in *Proc. IEEE Int. Conf. Robotics and Automation (ICRA)*, 2024.

[22] M. Sheeny, E. De Pellegrin, S. Mukherjee, A. Ahrabian, S. Wang, and A. Wallace, "RADIATE: A radar dataset for automotive perception in bad weather," *arXiv preprint arXiv:2010.09076*, 2021.

[23] S. Yogamani, C. Hughes, J. Horgan *et al.*, "WoodScape: A multi-task, multi-camera fisheye dataset for autonomous driving," in *Proc. IEEE/CVF Int. Conf. Computer Vision (ICCV)*, 2019, pp. 9308–9318.