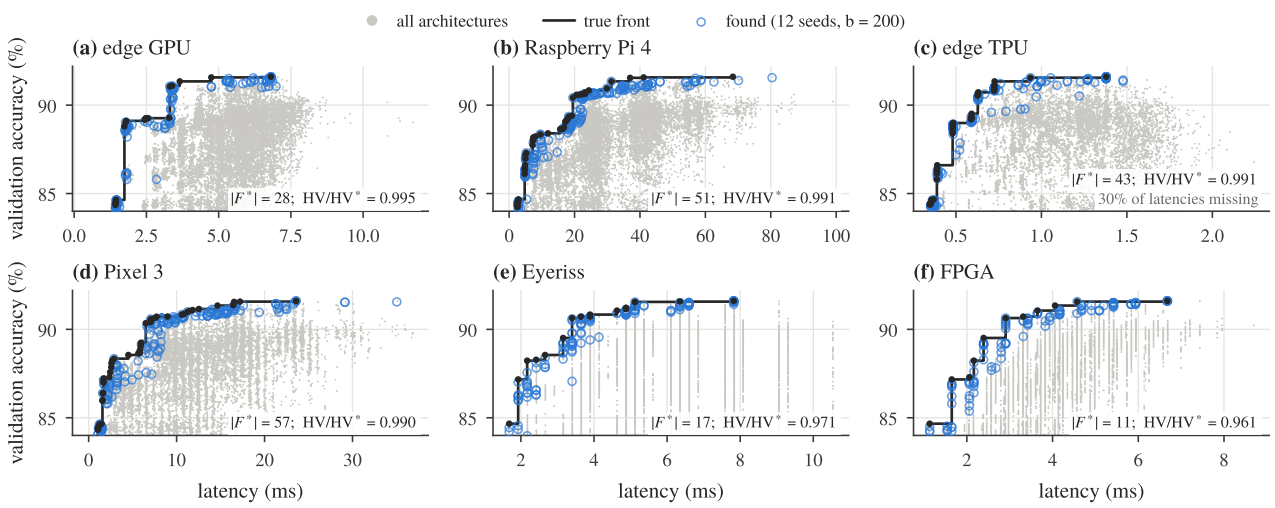

all architectures
true front
found (12 seeds, b = 200)
(a) edge GPU
(b) Raspberry Pi 4
(c) edge TPU
(d) Pixel 3
(e) Eyeriss
(f) FPGA
validation accuracy (%)
latency (ms)
|F*| = 28; HV/HV* = 0.995
|F*| = 51; HV/HV* = 0.991
|F*| = 43; HV/HV* = 0.991
30% of latencies missing
|F*| = 57; HV/HV* = 0.990
|F*| = 17; HV/HV* = 0.971
|F*| = 11; HV/HV* = 0.961