

Internet of Things

Developing an optimal wireless power transfer
system for a real-world low power LED wristband
application

MUHAMMAD WASIF

IMARA SPEEK

Delft University of Technology

October 27, 2013

Abstract

Morbi tempor congue porta. Proin semper, leo vitae faucibus dictum, metus mauris lacinia lorem, ac congue leo felis eu turpis. Sed nec nunc pellentesque, gravida eros at, porttitor ipsum. Praesent consequat urna a lacus lobortis ultrices eget ac metus. In tempus hendrerit rhoncus. Mauris dignissim turpis id sollicitudin lacinia. Praesent libero tellus, fringilla nec ullamcorper at, ultrices id nulla. Phasellus placerat a tellus a malesuada.

Keywords: Wireless power transfer, low power, real-world application

1 Introduction

introduction

2 Related work

related

3 Prior knowledge

prior

4 Description of the proposed idea

decription idea

4.1 Working towards a realization

Our major goal is to provide with an efficient solution that best meet the challenges in battery charging systems using wireless power transfer. Those challenges include:

1. Charging the battery as quickly as possible. Though batteries can store large amount of charge but unfortunately there is a limit to how fast a battery can be charged and this limit gets smaller with the size (capacity) of a battery. Smaller the battery, smaller the charging current limit will be and exceeding this limit will deteriorate battery's life. To overcome this difficulty we proposed adding a super capacitor in parallel with a battery. Even though super capacitors can hold less amount of charge compared to the same size battery but they can be charged much faster [?].
2. Providing long battery life with large charge to discharge ratio. In our scenario we want to make the charging interval as small as possible which requires a need to store as much charging current as possible in this short interval and that makes the addition of super capacitor an ideal solution to overcome the battery charging limitation. During the charging interval, super capacitor can store large amount of charging current and then later use this current to charge the battery with slow pace. Which provides long battery life in terms of large charge to discharge ratio.
3. Working out efficient protocol for sharing the available charge.

4.2 Protocols concerning environmental impact features

The major goal of this report is to be able to develop a real-world application. In order to do this, all real-world implications need to be taken into consideration. Scenario's were developed to develop a charging protocol that accounts for all possible states. For these scenarios a user wearing a tranceiver wristband is considered. Other viewpoints for a scenario can be the user wearing a receiving wristband or the transmitting bar. However, these viewpoints are considerably easier to address and will implements parts of the protocol designed for a tranceiving system.

There are certain states in which the system can reside depending on its own battery state, the battery state of neighbour nodes and the availability of a charging bar. These states and their transmissions are displayer in figure 1. It can either be sufficiently full defined as V_{full} , starving defined as V_{starve} or dead which is defined by V_{dead} . These parameters are further specified in section 5.

A charging protocol has to be designed to account for these combinations. We considered three possibilities: an infinite network like design, a hop-to-hop

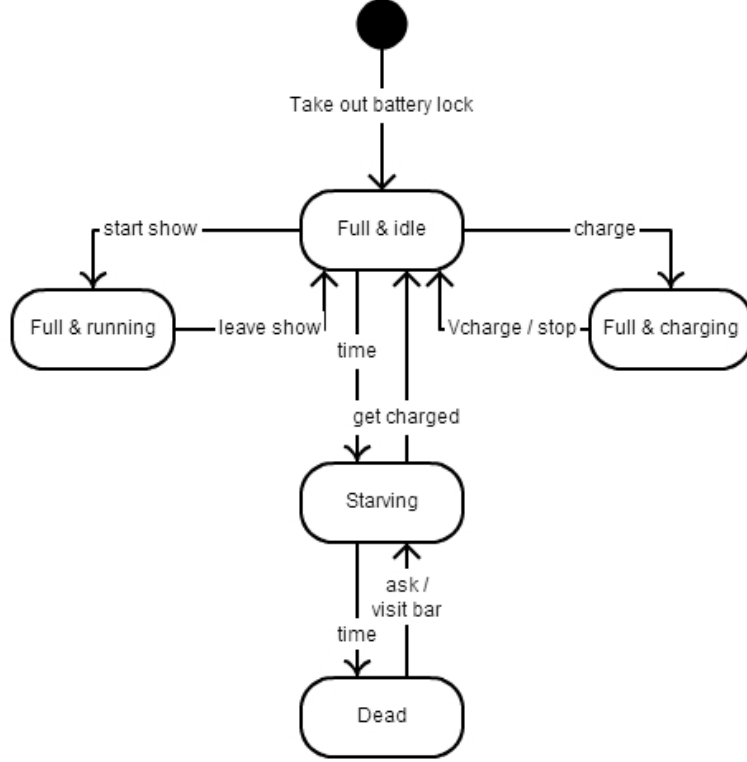


Figure 1: State diagram of a transceiving wireless power transfer system

spread of energy or an interactive behavior to selectively share energy. To stimulate interaction through this application we choose to apply a scenario where a user can choose to act upon energy requests and share with friends, or strangers.

To handle these protocols, an IC has to be added. This way whenever the battery reached V_{starve} it will send out a request for energy visually by lighting a red LED embedded in the wristband. Neighbouring nodes can then choose to react on this or save their own energy. Whenever the battery dies, the user either has to verbally ask for energy or visit an energy bar.

5 The proposed system design

The Figure The transmitter is powered up by a voltage source V_i of 12 Volts capable of delivering 400 milli-Amps of i_{in} current. i_c is the constant current that is consumed by the transmitter circuitry and i_s is the induction current which flows through the transmitter coil such that $i_{in} = i_c + i_s$. i_c is constant and depends on the transmitter inner circuitry power consumption, in our case $i_c = 100\text{milli} - \text{Amps}$. i_s depends on the distance between the

two magnetically coupled coils, greater the distance smaller the i_s will be. Another factor that i_s could depend is on adding an iron core between the two coils, adding a core makes the magnetic coupling stronger and increases the i_s which enhances an overall efficiency of the system. The receiver circuit receives an induction voltage V_r , rectifies it through a rectifier containing a shotkey diode D_r and a capacitor C_r . A shotkey diode is used in order to have a good frequency response at the range of $300 - 400Khz$ the transmitter working frequency also shotkey has lower forward voltage drop. The rectified voltage is then fed to the voltage regulator that produces constant voltage $V_{reg} = 5Volts$.

5.1 Analysis

The Figure shows a low level schematic of the receiver and charging circuit which will be the main focus of our project. The induction current i_r induced by the transmitter through magnetic coupling will be the main source of charging current. The current i_c charges the super capacitor, i_b charges the battery and i_L is consumed by the load including resistor R_L and a light source. During the charge cycle $i_r = i_c + i_b + i_L$. Now in analysis lets first consider the efficiency η of the circuit. If P_o is the power consumed by the receiver and P_i is the power provided by the transmitter, ignoring small power drops across D_r and C_r then:

$$\eta = \frac{P_o}{P_i} \quad (1)$$

where $P_o = V_{reg} \times i_r$ and $P_i = V_i \times i_s$

5.2 The internet of things

The assignment of this report conveyed critizing and accessing system-level Internet of Things components in scientific literature. Because the assigned paper did not include anything IoT related, we will present our own idea. In this section we will provide a short introduction to the Internet of Things and its key features, present our idea and focus on the practicality and entrepreneurial aspect of the idea.

The Internet of Things refers to uniquely identitfiable objects, or things, and their virtual representations in an Internet-like structure. [ADD REF]. The intelligent application is the key feature here. Important aspects to be taken into consideration when designing such a system are security, privacy and scalability.

The anatomy of Internet of Things is initiated by a certain event, that is detected and logged by devices that include self-properties [ADD REF]. This data is then uploaded by a ubiquitous and interoperable network. The unique feature of the internet of things is that this system is smart and can

generate knowledge and by analyzing this data and understands the system. Certain events are then triggered and reported as response. The intelligence of these systems lie in the adapting mechanisms that analyse and understand the environment in order to deal with the complex dynamics of a real-world environment.

6 Results

results

7 Conclusion

conclusion

References