

USB type C system

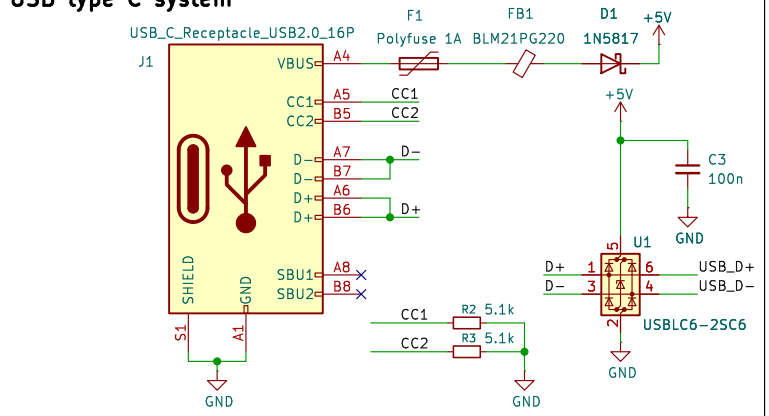

ESP-S3 MODULE

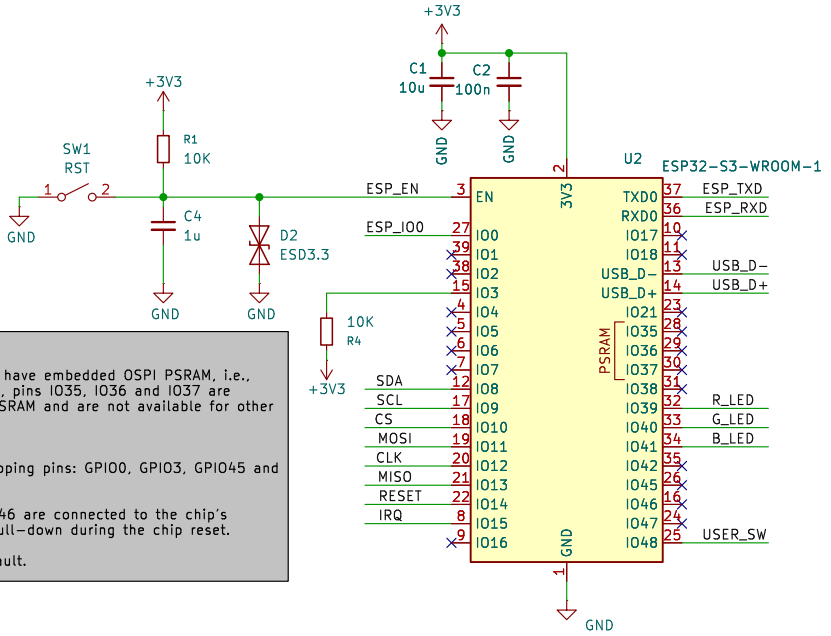

ESP32-S3-WROOM-1x


*In module variants that have embedded OSPI PSRAM, i.e., that embed ESP32-S3R8, pins IO35, IO36 and IO37 are connected to the OSPI PSRAM and are not available for other uses.

Note:
ESP32-S3 has four strapping pins: GPIO0, GPIO3, GPIO45 and GPIO46.


GPIO0, GPIO45 and GPIO46 are connected to the chip's internal weak pull-up/pull-down during the chip reset.

GPIO3 is floating by default.


LDO BLOCK




I/O (SPI BLOCK)




RGB LIGHT




T + H SENSOR

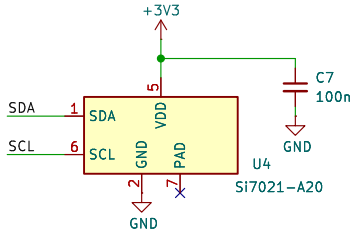


USER SWITCH

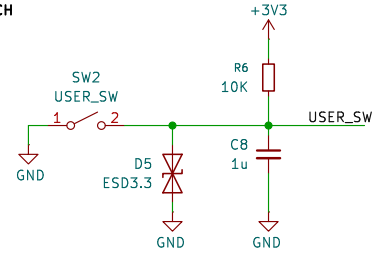


UART BLOCK



QWIIC CONNECTOR INTERFACE (I2C BLOCK)



BOOT SWITCH



MOUNTING HOLES

H1 MountingHole

H2 MountingHole

H3 MountingHole

H4 MountingHole

NOTE: They are few changes regaring the components availblity and make sure the footprints matches with the new or available component. Refer the Datasheet of each of them for more information.

By Imdad Aqueel

Sheet: /
File: ESP32-S3-testboard.kicad_sch

Title: ESP32-S3-TESTBOARD

Size: A4	Date: 2026-10-09	**Rev: 1.0**
KiCad E.D.A. 9.0.7		Id: 1/1