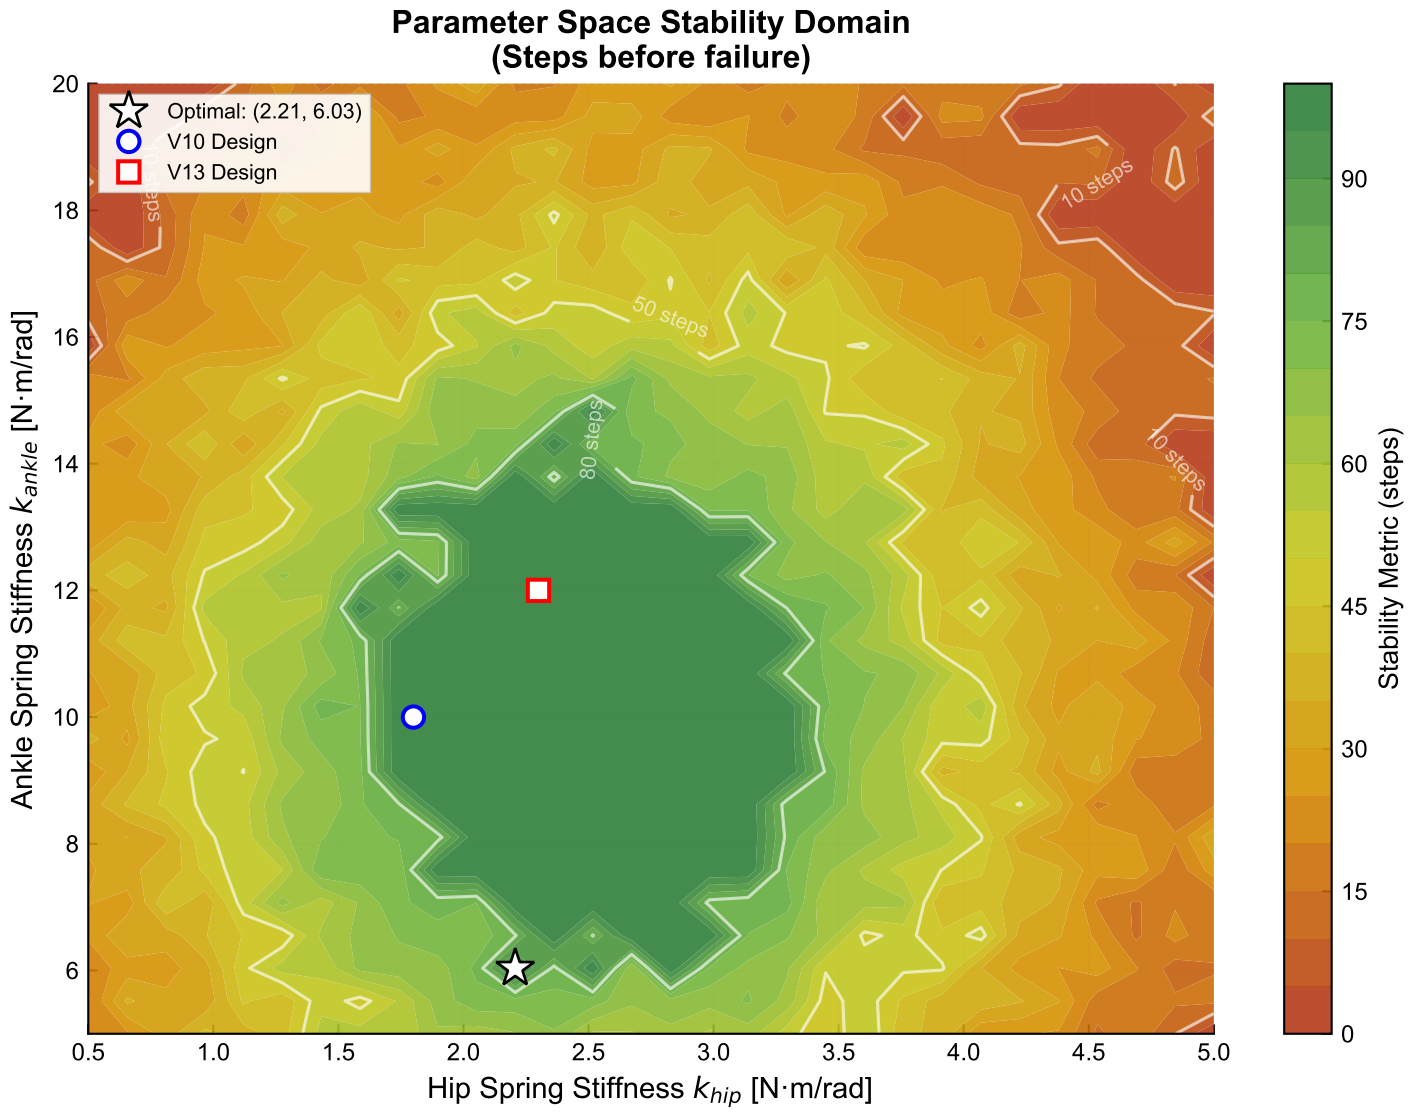

Parameter Space Stability Domain
(Steps before failure)
Optimal: (2.21, 6.03)
V10 Design
V13 Design
10 steps
50 steps
80 steps
10 steps
Ankle Spring Stiffness k_{ankle} [N·m/rad]
Hip Spring Stiffness k_{hip} [N·m/rad]
Stability Metric (steps)
20
18
16
14
12
10
8
6
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
4.5
5.0
90
75
60
45
30
15
0