


[illegible]

The USB input power is hooked up to the 5V rail and can power the entire board. It supports a max current draw of 500mA. connected to the 5V power on the board.

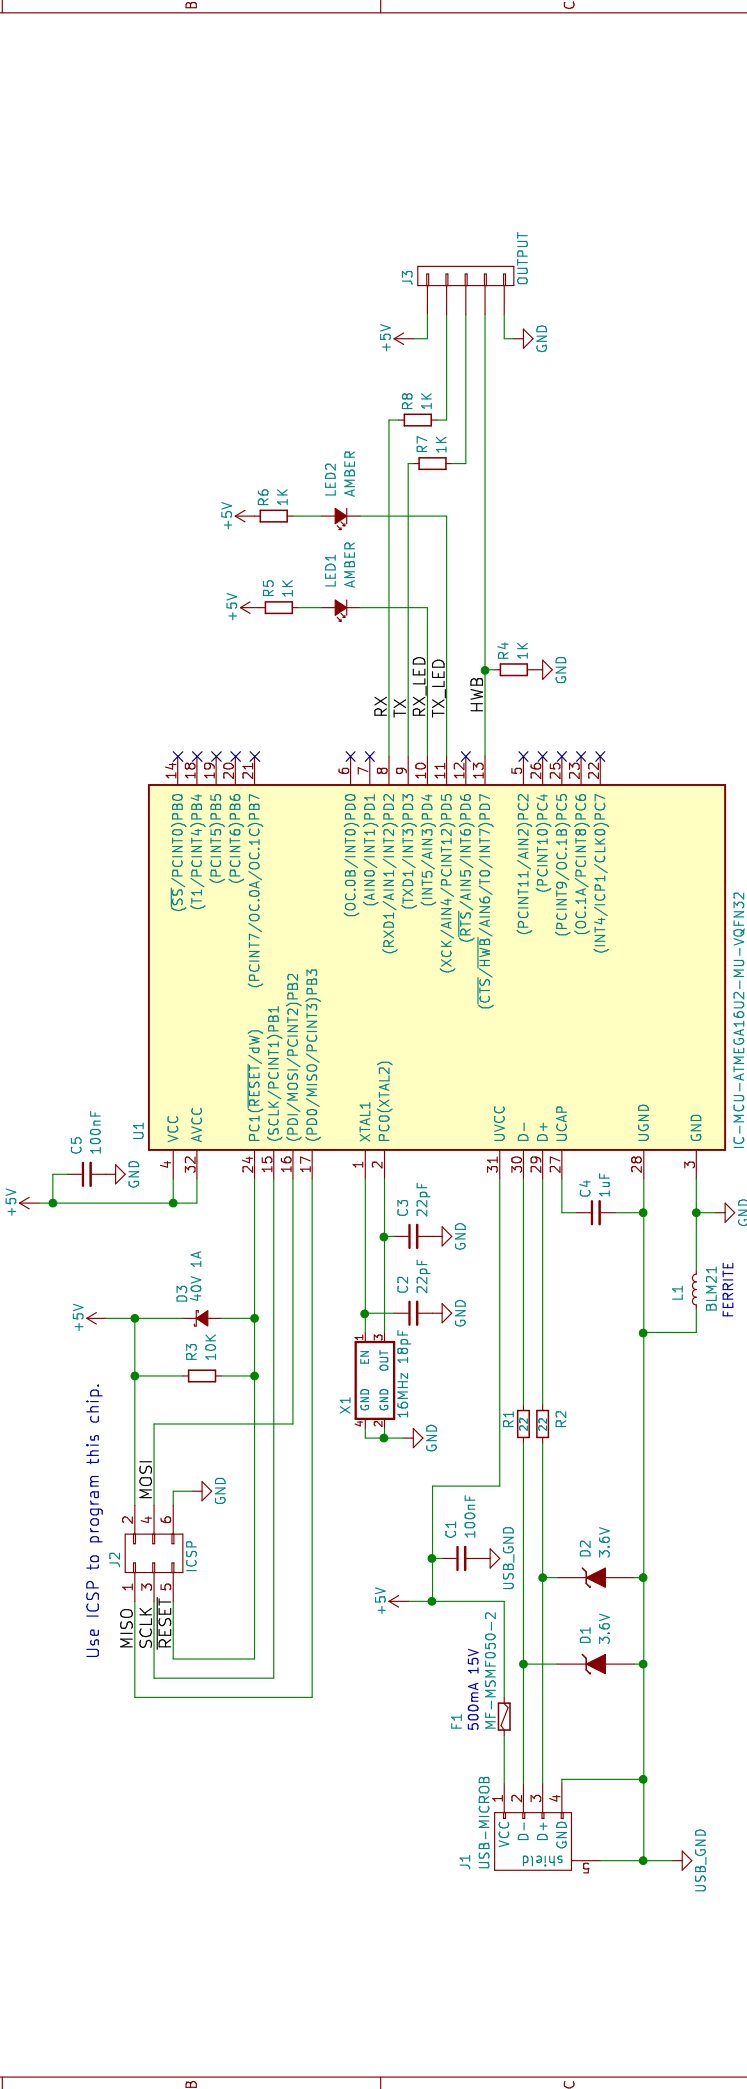

Wickerbox Electronics
Author: Jenner Hanni
Contact: jeh.wicker@gmail.com
Released under the CERN Open Hardware License v1.2

Sheet: /
File: atmega16u2.sch

Title: Atmega16U2 Breakout Board

Size: A4	Date: 2016-05-02	Rev: 1.0
----------	------------------	----------

KiCad E.D.A.	kiCad	4.0.1-3.201512221402+619838ubuntu14.04.1-stabled: 1/1
--------------	-------	-------------------------------------------------------