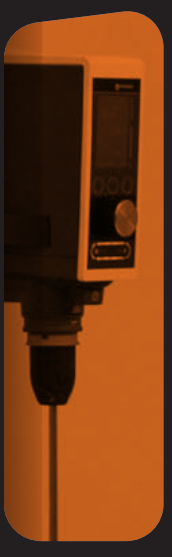

HEI

DOL

PH

RESEARCH MADE EASY

SOLUTIONS OVERVIEW

inkarp®

Your Knowledge... Our Solution...!

Authorised India Partner

The Hei-VAP series – one concept for all requirements

Standard Models

Without vacuum control. For integration in an existing vacuum system or for configuration with external vacuum controller.

Hei-VAP Core

- Digital display
- Direct access to heating bath temperature and rotation speed
- Lock function
- Standby button
- Residual heat indicator

Hei-VAP Expert

- 5" touch display
- Clear display of all valves (Basic / Advanced modes)
- Timer
- Limiting of the heating temperature
- Multilingual menu with text warnings
- Optional display of the boiling temperature
- USB and Micro-SD interfaces

Hei-VAP Ultimate

- 7" touch display
- Clear display of all valves (Basic / Advanced modes)
- Timer
- Limiting of the heating temperature
- Multilingual menu with text warnings
- Optional display of the boiling temperature
- USB and Micro-SD interfaces as well as LAN / RS 232 interfaces (Lab 4.0-ready)

Control Models

Including smarter control box. For control of any vacuum source as well as the

Hei-CHILL recirculation chiller directly via the control panel of the rotary evaporator.

Hei-VAP Expert Control
Extends the functions of the Hei-VAP Expert to include:

- Control of any vacuum sources and Heidolph recirculation chillers
- Solvent library
- Favorites memory
- Automatic boiling point determination and distillation (DAA, see page 19)
- Ramp programming

Hei-VAP Ultimate Control
Extends the functions of the Hei-VAP Ultimate to include:

- Control of any vacuum sources and Heidolph recirculation chillers
- Solvent library
- Favorites memory
- Automatic boiling point determination and distillation (DAA, see page 19)
- Ramp programming

Technical Specifications

Rotary evaporator

Model	Hei-VAP Core (HL)	Hei-VAP Core (ML)	Hei-VAP Expert (HL/ML)	Hei-VAP Ultimate (HL/ML)	Hei-VAP Expert Control (HL/ML)	Hei-VAP Ultimate Control (HL/ML)
Lift	Manual lift	Motor driven lift	Manual lift / Motor drive lift	Manual lift / Motor drive lift	Manual lift / Motor drive lift	Manual lift / Motor drive lift
Speed range	10–280 rpm	10–280 rpm	10–280 rpm	10–280 rpm	10–280 rpm	10–280 rpm
Rotation speed indicator	3.5" LCD display	3.5" LCD display	5" LCD color display	7" LCD color display	5" LCD color display	7" LCD color display
Heating power	1,300 W	1,300 W	1,300 W	1,300 W	1,300 W	1,300 W
Temperature range heating bath	20–210 °C	20–210 °C	20–210 °C	20–210 °C	20–210 °C	20–210 °C
Heating bath setting accuracy	±1 °C	±1 °C	±1 °C	±1 °C	±1 °C	±1 °C
Heating bath temperature display	3.5" LCD display	3.5" LCD display	5" LCD color display	7" LCD color display	5" LCD color display	7" LCD color display
Heating bath temperature control	electronic / digital	electronic / digital	electronic / digital	electronic / digital	electronic / digital	electronic / digital
Heating bath material	Stainless steel V4A (1.4404)	Stainless steel V4A (1.4404)	Stainless steel V4A (1.4404)	Stainless steel V4A (1.4404)	Stainless steel V4A (1.4404)	Stainless steel V4A (1.4404)
Heating bath diameter	255 mm	255 mm	255 mm	255 mm	255 mm	255 mm
Heating bath volume	4.5 l	4.5 l	4.5 l	4.5 l	4.5 l	4.5 l
Connected load	1,400 W	1,400 W	1,400 W	1,400 W	1,400 W	1,400 W
Weight without glassware	16 kg	16 kg	16 kg	16 kg	16 kg	16 kg
Dimensions with glassware G3 max. w / d / h	739×477×845	739×477×845	739×477×845 mm	739×477×845 mm	739×477×845 mm	739×477×845 mm
Cooling surface	1,400 cm²	1,400 cm²	1,400 cm²	1,400 cm²	1,400 cm²	1,400 cm²
Degree of protection [1] EN 60529	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20

EVAPORATION

Backed by 30+ years of expertise, Hei-VAP rotary evaporators deliver cutting-edge performance for efficient solvent evaporation in laboratory and industrial environments.

- Engineered for simplicity and precision, combining accurate temperature control with reliable vacuum performance to streamline solvent removal.
- Ideal for a wide range of applications, including:
  - Purification & separation of reaction products
  - Solvent removal
  - Concentration, powder drying, and extraction of natural products
  - Environmental & food safety testing

Hei-VAP BENCHTOP ROTARY EVAPORATORS

Engineered to master the full spectrum—from basic evaporation to higher volumes—with intuitive control, intelligent automation, and rock-solid reliability all in a compact benchtop design.

2.5 L - 85 L
EVAPORATION PER DAY
when paired with Hei-VOLUME Distimatic Pro

Accommodates 50 - 5000 ml flask size

Unmatched system vacuum tightness

Patented clamping sleeve alleviates glass on metal connections, preventing stuck vapor tubes

Hei-VAP Models:	Core	Expert / Ultimate	Control
Digital display set / actual bath temp and rotation speed	✓	✓	✓
Timer		✓	✓
Max. temperature limitation		✓	✓
Solvent Library			✓
Integrated control of vacuum pump and chiller			✓

CE Certified · 3 Year Warranty · Energy Efficiency · Safety · Sustainability

Scan here to learn more about the **Evaporation Lineup**

Diaphragm Vacuum Pumps

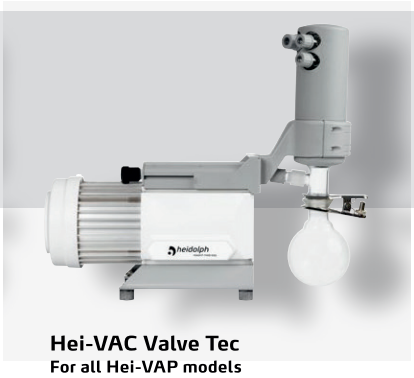

Hei-VAC Valve Tec
For all Hei-VAP models

- Recommended for solvents within the low to medium boiling temperature range
- The vacuum regulation can be valve controlled or take place via the manual vacuum controller
- A vacuum valve is necessary if the vacuum pump is to be combined with the Hei-VAP Expert Control/ Hei-VAP Ultimate Control

Rotavac Valve Control
For all Hei-VAP models

- Sufficient intake capacity for three rotary evaporators simultaneously
- The vacuum regulation can be valve controlled or take place via the manual vacuum controller
- The vacuum pump can be switched on and off via the switchbox in line with needs
- A vacuum valve is necessary if the vacuum pump is to be combined with the Hei-VAP Expert Control/ Hei-VAP Ultimate Control

Hei-VAC Vario Tec
For Hei-VAP Expert Control/ Ultimate Control models (direct adjustment via rotary evaporator)

- Recommended for solvents within the low to medium boiling temperature range

Hei-VAC Vario Control
For Hei-VAP Expert Control/ Ultimate Control models (direct adjustment via rotary evaporator)

- Even if the gas ballast valve is open, a very good end vacuum is achieved when working with readily condensible vapors
- This enables the evaporation of high-boiling substances such as DMF or DMSO at low temperatures

Hei-VAC Vario Station
Suitable for Hei-VAP Core models

- Independently controllable pump stand, consisting of vacuum pump and vacuum controller
- The pinpoint vacuum regulation prevents boiling delays and avoids sample loss
- Due to the automatic adjustment of the vacuum to the process parameters, time is gained for more important tasks

Note: Condensate cooler is available as an optional accessory and should be purchased separately based on your requirements.

	Hei-VAC Valve Tec	Rotavac Valve Control	Hei-VAC Vario Tec	Hei-VAC Vario Control	Hei-VAC Vario Station
Diaphragm vacuum pump	Two-stage	Two-stage	Two-stage	Three-stage	Three-stage
Intake capacity	0.75 m³/h	2.0 m³/h	1.0 m³/h	1.7 m³/h	1.7 m³/h
Minimum end pressure	12 mbar	7 mbar	12 mbar	2 mbar	5 mbar
Combinable with condenser	yes	yes	yes	yes	yes
Power input	80 W	180 W	160 W	160 W	160 W
Weight	6.0 kg	12.8 kg	4.3 kg	5.4 kg	6.0 kg
Dimensions without condenser w/d/h	145×315×185 mm	195×245×310 mm	156×236×196 mm	167×236×196 mm	193×299×299 mm

MADE IN
GERMANY

All Benefits at a Glance

3-year warranty on all devices and an average operational lifespan of 10 years

Intelligent Distillation

Safety Enclousers for condensor

Course of the process displayed with pictograms and colors for clear identification of process progress

Multilingual user interface

Complete efficiency and safety in unattended and continuous use

Easy cleaning of the heating bath thanks to concealed heating coil and drain valve

Enabling and maintaining constant conditions for higher throughput

Receiver with cassette

Hei-VAP Industrial Rotary Evaporators for Safe distillation Process.

Glassware Sets



Glassware A

For distillations of splashing and foaming substances.
With a cooler and an expansion vessel

Glassware AC
Like A, with additional receiving flask



Glassware A1

For low-boiling solvents and maximum distillation performances. With an ascending and a descending chiller as well as a riser tube

Glassware A1C
Like A1, with additional receiving flask



Glassware A2

For distillations of splashing and foaming media with simultaneously high distillation performances. With an ascending and a descending chiller as well as an expansion vessel

Glassware A2C
Like A2, with additional receiving flask



Glassware K

Condensate traps for low-boiling solvents – cooling by dry ice

Glassware KC
Like K, with additional receiving flask



Glassware R

Standard glassware for high-boiling distillation and reactions with non-return valve. With one chiller

Glassware RC
Like R, with additional receiving flask



Glassware Shorty R

For applications under fume hoods or in confined conditions. Same condensation surface as glassware R with 32 cm lower chiller height. With one chiller

Shorty RC glassware
Like Shorty R, with additional receiving flask

One 20 l evaporator and one 10 l receiving flask each are already included in the scope of delivery of all glassware sets.

Technical Specifications

Hei-VAP Industrial

Model	Hei-VAP Industrial / Hei-VAP Industrial B
Speed range	6–160 rpm
Rotation speed indicator	digital
Display	7" touch display
Lift	Motor driven lift
Lifting speed	45 mm/s
Lift travel	180 mm
Motor	EC motor
Heating power	4,000 W
Temperature range heating bath	20–180 °C
Heating bath setting accuracy	±1 °C
Overtemperature protection	110 (H_2O) / 210 (oil)
Heating bath temperature display	digital
Heating bath temperature control	Microprocessor
Heating bath material	Stainless steel V4A (1.4404)
Heating bath outside diameter	400 mm
Heating bath volume	24 (H_2O) / 22 (oil)
Water bath level control	automatically via water refill and level switch
Boiling temperature display Required accessories	digital Temperature sensor
Vapor temperature sensor display range	0–200 °C (display accuracy 0.1 °C)
Vacuum controller integrated	yes
Timer	yes
Vacuum control mode, $SET_{pressure}$ [2]	yes
Vacuum control mode, $AUTO_{accurate}$ [2] requires AUTOaccurate sensor	yes
Programming of ramps	yes
Recording of process data	yes
Connected load	4,600 W
Weight without glassware	approx. 120 kg
Dimensions max. w/d/h	970×690×1,600 mm
Evaporation rate [1] at 40 °C temperature difference	Toluene 26.0 l/h Acetone 25.9 l/h Ethanol 12.9 l/h Water 4.7 l/h
Maximum cooling surface	1.2 m²
Permissible ambient conditions	5–31 °C at 80 % rel. humidity, 32–40 °C linearly decreasing to max. 50 % rel. humidity
Protection class DIN EN 60529	IP 20

Standard supply voltage: 400 V three-phase d.c. current connection. Other supply voltages on request.
[1] Δ T = difference between heating bath temperature and boiling temperature
[2] Only possible in conjunction with vacuum systems

Hei-VAC 20 - Valve-Regulated Vacuum Pumps

Includes secondary condenser and air intake separation vessel

This vacuum system can be applied in many different fields in order to evacuate, evaporate and pump out gases and vapors. Thanks to the emission condenser it is possible to achieve a chemical recovery of almost 100%

Excellent compatibility with chemicals and condensate
Excellent ultimate vacuum of 2 mbar
Very quiet and very low vibration
Very high suction capacity of 3.0 m3/h

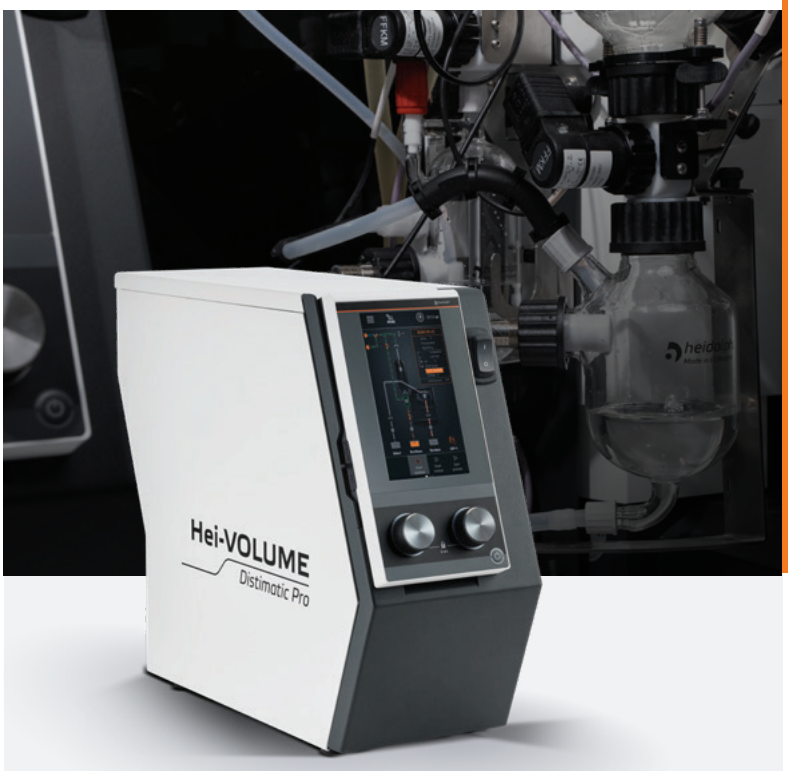

HEIDOLPH EXCLUSIVE

AUTOMATED EVAPORATION

Hei-VOLUME DISTIMATIC PRO

Integrated Module for Benchtop and Industrial Evaporator

Saves time. Increases throughput. Reduces costs.

Hei-VOLUME Distimatic Pro automates feeding, distillation, and drainage for truly unattended operation. When paired with a Hei-VAP Industrial, it offers a flexible alternative to oversized 50–100 L evaporators—maximizing efficiency and return on investment.

50+ L
EVAPORATION PER DAY

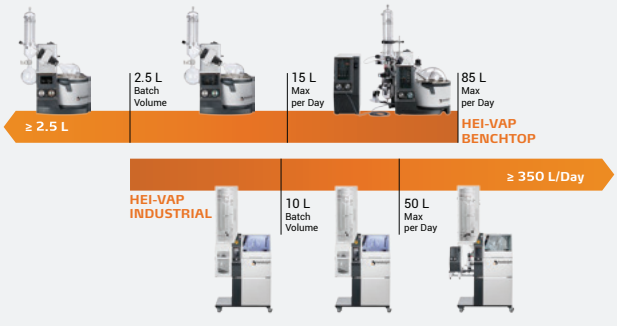

For full infographic please visit **heidolph.com**

Hei-VAP INDUSTRIAL ROTARY EVAPORATORS

Perfectly designed for a great deal of different distilling processes, from standard evaporation without vacuum control up to complex distillation processes with vacuum control.

Evaporates up to 350 L per day

Automatic water bath refill system

Easy to use panel to help you set optimal parameters and safety features

10 L - 350 L
EVAPORATION PER DAY
when paired with Hei-VOLUME Distimatic Pro

SEAMLESS INTEGRATION

Hei-CHILL BASECART CHILLER

Save space without compromising cooling power

MADE IN GERMANY

All Benefits at a Glance

3-year warranty on all devices and an average operational lifespan of 10 years

CE Certified | Energy Efficiency | Safety | Sustainability

Safe Heating and Mixing

With the free Hei-Control software for the Hei-Connect, process parameters can be controlled and stored via a PC

The closed housing protects the electronic and mechanical components of the magnetic stirrer from aggressive media and fumes

DIE-CAST HOUSING

The fire-resistant die-cast housing prevents damage to inner components, providing outstanding protection against heat, chemicals, and falls.

UNIQUE KERA-DISK®

The patented Kera-Disk® heating plate ensures the fastest heating times; an extremely thin ceramic coating makes the plate chemical-resistant

In the event of a heating plate failure, the stirring process is NOT interrupted; this prevents overheating of the sample

SAFETY CIRCUITS

With two independent safety circuits, the heating function shuts off in case of overtemperature, minimizing the risk of accidents or fires.

A separate On/Off button for the heating function prevents unwanted heating. The activated heating function is clearly detectable. In addition, a residual heat indicator effectively protects against burns after the heating function has been switched off

Damage to the device is excluded, even at the highest temperatures – the models have a fireproof die-cast housing

A heating power of 800 watt means significantly faster heating times compared to magnetic stirrers with 600 watt.

Magnetic Stirrers - Models

Hei-PLATE Mix 'n' Heat Expert

Well-designed features for a carefree working

Hei-PLATE Mix 'n' Heat Ultimate

Precision and networking opportunities



Hei-Mix S

For gentle stirring in biology and microbiology applications -

Hei-PLATE Mix 20 l

For all stirring tasks without heating

Hei-PLATE Mix 'n' Heat Core

Simply stir and heat

Hei-PLATE Mix 'n' Heat Core+

For high demands with temperature sensor

Technical Specifications

Magnetic stirrers

Magnetic stirrers with heating function

Model	Hei-Mix S	Hei-PLATE Mix 20 L	Hei-PLATE Mix 'n' Heat Core	Hei-PLATE Mix 'n' Heat Core+	Hei-Plate Mix 'in' Heat Expert & Ultimate
Speed range	0–2.200 rpm	100–1.400 rpm	100–1.400 rpm	100–1.400 rpm	100–1.400 rpm
Speed accuracy	±5 %	±2 %	±2 %	±2 %	±2 %
Drive	Shaded pole motor	EC motor, left-handed	EC motor, left-handed	EC motor, left-handed	EC motor
Overheat protection	–	–	–	–	no, but error message
Operating mode	Continuous operation	Continuous operation	Continuous operation	Continuous operation	Continuous operation
Power input	7 W	20 W	825 W	825 W	825 W
Connection	L+N+PE	L+N+PE	L+N+PE	L+N+PE	L+N+PE
Sound pressure level IEC 61010	<70 dB (A)	<50 dB (A)	<50 dB (A)	<50 dB (A)	<50 dB (A)
Display	–	–	–	LCD display	2 X TFT Display
Analog / digital interface	–	–	–	–	digital (RS 232) for ULTIMATE
Heating power	–	–	800 W	800 W	800 W
Heating temperature range	–	–	20–300 °C	20–300 °C	20–350 °C
Heating control	–	–	PID	PID	Micro controller
Accuracy temperature setting	–	–	–	±1 K	±1K with sensor
Sensor connection	–	–	EKT Hei-Con	Pt 1000	Pt 1000
Control accuracy hotplate	–	–	±5 °C	±5 °C	±5 °C
Residual heat indicator	–	–	yes	yes	yes
Timer	–	–	–	–	yes
Max. stirring capacity H_2O	5 l	20 l	20 l	20 l	20 l
Max. load	6 kg	25 kg	25 kg	25 kg	25 kg
Usable area of heating plate Ø	104 mm	145 mm	145 mm	135 /145 mm	135 /145 mm
Top plate material	PVDF	Kera-Disk® aluminum alloy, coated	Kera-Disk® aluminum alloy, coated	Kera-Disk® aluminum alloy, coated	Kera-Disk® aluminum alloy, coated
Weight	1.1 kg	3.0 kg	3.0 kg	3.0 kg	2.9 kg
Dimensions w/d/h	126×140×80 mm	168×299×101 mm	168×299×101 mm	168×299×101 mm	168×299×106 mm
Maximum height above sea level	up to 2,000 mamsl	up to 2,000 mamsl	up to 2,000 mamsl	up to 2,000 mamsl	up to 2,000 mamsl
Admissible permissible ambient conditions	5–31 °C at up to 80 % rel. humidity, 32–40 °C at up to 50 % rel. humidity (linearly reducing)	5–31 °C at up to 80 % rel. humidity, 32–40 °C at up to 50 % rel. humidity (linearly reducing)	5–31 °C at up to 80 % rel. humidity, 32–40 °C at up to 50 % rel. humidity (linearly reducing)	5–31 °C at up to 80 % rel. humidity, 32–40 °C at up to 50 % rel. humidity (linearly reducing)	5–31 °C at up to 80 % rel. humidity, 32–40 °C at up to 50 % rel. humidity (linearly reducing)
EMC class		B, Group 1	B, Group 1	B, Group 1	
Overvoltage category		II	II	II	
Protection class IEC 61140		I	I	I	I
Degree of protection IEC 60529	IP 21	IP 42	IP 42	IP 42	IP 42

Standard supply voltage: 230 V. Other supply voltages on request.

Standard supply voltage: 230 V. Other supply voltages on request.

Magnetic Stirrers - Accessories

Pt1000 clamping system for bath attachments from 3 to 5 liter (Hei-Connect)



Temperature sensor Pt1000 – (glass-coated)



Pt1000 temperature sensor – stainless steel (V4A)

RS 232 cable (9-pole)

The Hei-TORQUE Series

OVERHEAD STIRRERS

Small but Fierce, Hei-TORQUE overhead stirrers offer an all-purpose stirrer that provides the best mixing results even for very challenging applications. Choose from our Core, Expert, and Ultimate models to find the torque that best suits your application.

CE Certified

3 Year Warranty

Safety

Hei-TORQUE Expert
Clearly laid out and sturdy

Hei-TORQUE Ultimate
Customized and precise

Hei-TORQUE Core
The lightweight choice for big tasks

All Hei-TORQUE models are compatible with the ViSCO JET® system.

QUICK CHUCK

The Integrated Quick Chuck allows for one-handed stirring blade changes without any tools, saving both time and costs.

EFFICIENT MIXING

The ability to change direction enhances mixing for suspensions or dissolving, ultimately saving time in Ultimate 100 and 200 models.

SLIDER

On the Hei-TORQUE Expert and Ultimate, the slider control for device power ensures safety by preventing unintentional device activation.

SAFETY SETTINGS

Safety settings, including start speed and torque limit, are maintained within specific limits to prevent spilling when starting the Hei-TORQUE.

Technical Specifications

Overhead stirrer

Model	Hei-TORQUE Core	Hei-TORQUE Expert 100	Hei-TORQUE Expert 200	Hei-TORQUE Expert 400	Hei-TORQUE Ultimate 100	Hei-TORQUE Ultimate 200	Hei-TORQUE Ultimate 400
Power rating Motor input / output	105/75 W	90/50 W	120/80 W	150/90 W	90/50 W	120/80 W	150/90 W
Number of gear stages	1	1	1	2	1	1	2
Speed range	20–2.000 rpm	10–2.000 rpm	10–2.000 rpm	10–400 rpm (gear stage I) 20–2,000 rpm (gear stage II)	10–2.000 rpm	10–2.000 rpm	10–400 rpm (gear stage I) 20–2,000 rpm (gear stage II)
Change of rotation direction	–	–	–	–	yes	yes	–
Rotation speed indicator	digital	digital	digital	digital	digital	digital	digital
Control panel	monochrome 2.4"	monochrome 2.4"	monochrome 2.4"	monochrome 2.4"	color 3.2"	color 3.2"	color 3.2"
Speed control	electronic	electronic	electronic	electronic	electronic	electronic	electronic
Max. torque	40 Ncm*	100 Ncm	200 Ncm	400 Ncm	100 Ncm	200 Ncm	400 Ncm
Torque indicator	Symbol	Symbol	Symbol	Symbol	Value	Value	Value
Behavior in case of overload	Automatic cut-out with display	Automatic cut-out with display	Automatic cut-out with display	Automatic cut-out with display	Automatic cut-out with display	Automatic cut-out with display	Automatic cut-out with display
Motor protection	Temperature monitoring software	Temperature monitoring software	Temperature monitoring software	Temperature monitoring software	Temperature monitoring software	Temperature monitoring software	Temperature monitoring software
Max. viscosity	10,000 mPas	60,000 mPas	100,000 mPas	250,000 mPas	60,000 mPas	100,000 mPas	250,000 mPas
Max. volume H_2O	25 L	50 L	50 L	100 L	50 L	50 L	100 L
Analog/digital interface	–	–	–	–	USB and RS 232	USB and RS 232	USB and RS 232
Permissible duty cycle	Continuous operation	Continuous operation	Continuous operation	Continuous operation	Continuous operation	Continuous operation	Continuous operation
Counter/timer	yes	–	–	–	yes	yes	yes
Stirrer shaft Ø max.	10.5 mm	10.5 mm	10.5 mm	10.5 mm	10.5 mm	10.5 mm	10.5 mm
Dimensions device w/d/h	70×195×282 mm**	86×247×340 mm**	86×247×340 mm**	93×247×340 mm**	86×247×340 mm**	86×247×340 mm	93×247×340 mm**
Dimensions support rod Ø×w	13×160 mm	13×160 mm	13×160 mm	13×160 mm	13×160 mm	13×160 mm	13×160 mm
Weight	2.3 kg	4.4 kg	5.1 kg	5.3 kg	4.4 kg	5.1 kg	5.3 kg
Permissible Permissible ambient conditions	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity	5–31 °C at 80% rel. humidity, 32–40 °C linearly reducing up to max. 50% rel. humidity
Degree of protection EN 60529	IP 42	IP 54	IP 54	IP 54	IP 54	IP 54	IP 54

Standard supply voltage: 230 V. Other supply voltages on request.

* 65 Ncm for short-term overload operation
** Height from upper edge of device to lower edge of chuck with jaws completely retracted

Shakers for all tasks – versatile and individual

With the wide range of accessories for different applications and vessels and the modular Incubator 1000 concept, the platform shakers can be individually configured.

Overhead Shakers

Robust devices for applications in biochemistry up to water and sediment analysis according to DIN EN 12457-4.

Reax 20

Corresponds to the specifications according to DIN EN 12457-4. Also suitable for mixing cylinders or wide-neck bottles up to 270 mm in height and diameter of max. 136 mm.

Reax 2

Fully flexible loading with the universal adapter for vessels with a high of 50 to 160 mm or with the adapter for 20 test tubes. Loading capacity 1 kg

Vortexer

Whether in test tubes or centrifuge tubes, even with different diameters and tubes: The strong shaking movement guarantees excellent mixing results without exception.

Reax top/Reax control

The shaking orbit of 5 mm reliably and quickly achieves an even distribution. Reax control with electronic speed control – the speed remains constant even in the low range and during load changes.

Multi Reax

Process multiple samples at the same time with attachments for 12 or 26 vessels.

Platform Shakers

The wide range of platform shakers offers the right solution for many vessels and applications

Titramax 100/101/1000

Noticeably efficient for multiple samples simultaneously

Expert 2000

Circular motion ensures life and vitality

Reciprocating Core 2000

Linear side-to-side motion

3 Year Warranty | Energy Efficiency | Safety

Peristaltic Pumps

3 Year Warranty | Safety

Precise Dosing and Dispensing
Need a reliable system for efficient conveying or precise dosing? We offer solutions - even for corrosive, sterile or viscous media!

Accessories

Multi-channel pump head

SP quick

Silicone

Tygon® standard

inkarp®

Your Knowledge... Our Solution...!

Inkarp Instruments Pvt Ltd (Head Office)

Plot No. 5A/10-11, IDA Nacharam Road No. 1, Nacharam - Chilka Nagar Road, Hyderabad - 500076

Email: sales@inkarp.co.in | service@inkarp.co.in | Ph. No.: +91 99666 34008 | Telephone: +91 40 2717 2293