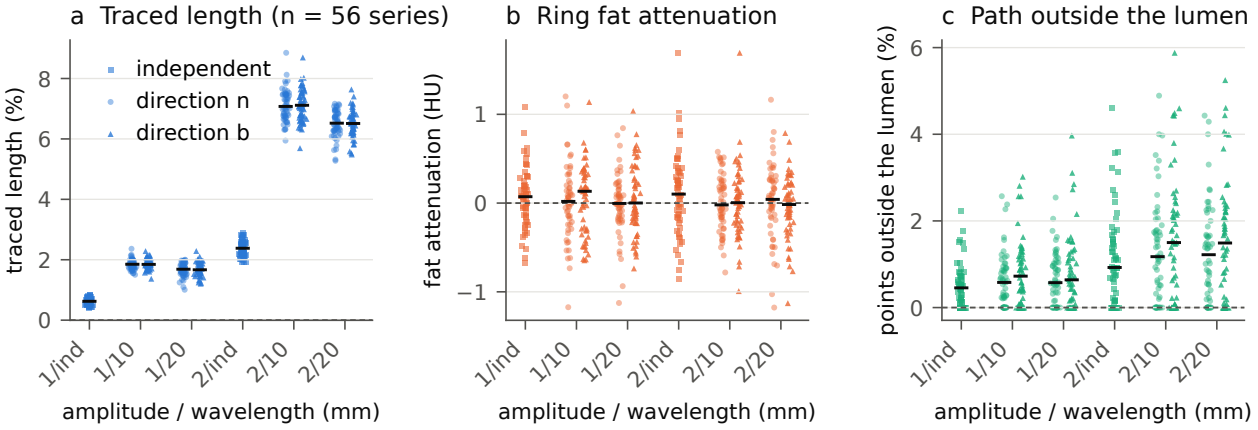
a Traced length (n = 56 series)
b Ring fat attenuation
c Path outside the lumen
independent
direction n
direction b
traced length (%)
fat attenuation (HU)
points outside the lumen (%)
0
2
4
6
8
1
−1
1/ind
1/10
1/20
2/ind
2/10
2/20
amplitude / wavelength (mm)