

Building Sustainable and healthy homes

HIGH DENSITY POLYMER COMPOSITE



01


An initiative towards
making this earth
better place to live in.



Made with European technology
Composition of
100% virgin polymer & ricehusk
HDPC board come with both side
sanding for easy application



HDPC board is a high performance wood.

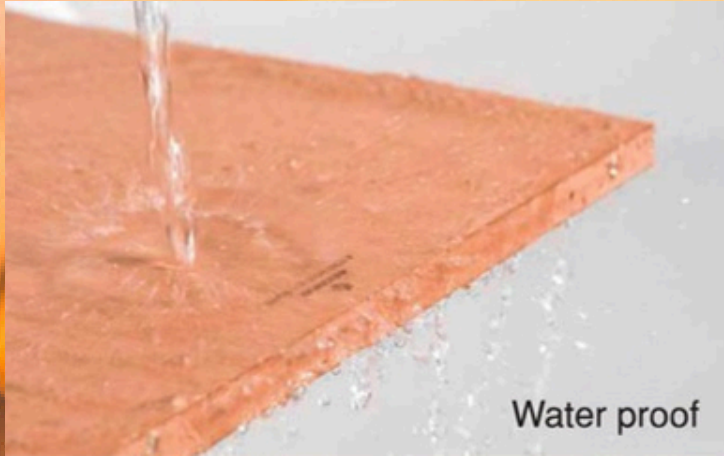


HDPC board inspires you to design & create faster.



Painting



CNC Routing

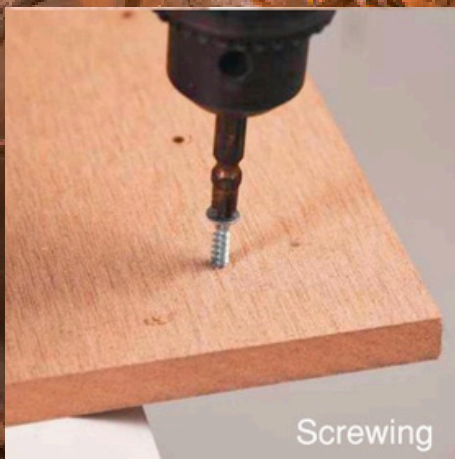

Screwing




Drilling




Cutting



Overlay Laminate

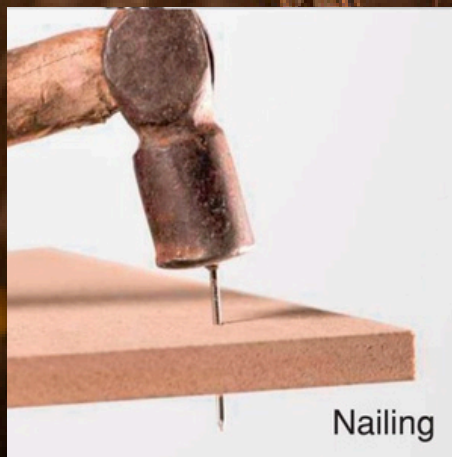

Nailing

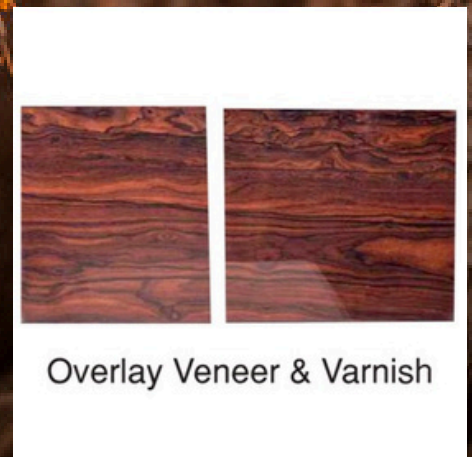

Overlay Veneer & Varnish

SUPPORT

Due to its features, HDPC boards are best suited for all types of interior and exterior applications. Generally speaking, HDPC stands out to what it commits - One product, Infinite scope of applications. However, thermoplastic properties of HDPC boards must be taken into consideration during the designing and execution process.

Depending on the application, fastening is usually done using screws or nails. Select the wide head screw, fully threaded and tighten slowly. Additionally, glueing on the joinery can be done for improved strength.

Board Thickness:

8mm, 12mm, 18mm, 28mm 32mm.



THERMOFORM

Unique properties of HDPC BOARD ensures that the board can be easily thermoformed. The high content of natural fibre ensures that there is no compromise on the strength of the board post-thermoforming.



Heating Temperature: 100 - 120 °C

Heating Time: 1 - 2 min/mm of board thickness (for example 18 - 36 minutes for 18mm board)

Locking (Desired Shape) Time: 5 mins

Cooling Time: 7 - 2 min/mm of thickness

DIGITAL PRINTING

Concept HDPC Boards are suitable for printing applications. In digital printing, many wood patterns and customized designs are feasible



Ensure that the board is free from dust before printing upon printing, various types of varnish and finish are possible. The transparent coating is suggested to protect the print surface from dust and abrasion.



CONCEPT
HDPC BOARD

TM

SURFACE FINISH


Various types of surface finish is possible on Concept HDPC Boards. Surfaces can be customised and optimised with paint, varnish and print. Since the coating is applied subsequently, modifications are possible at any time by removing the existing surface and applying a new one.



We suggest to use UV Protected Varnish / Paint for outdoor application.

SCREW & NAILING

Concept HDPC boards can be worked with wide-head fasteners such as screws and nails. Selection of fastener is usually done depending on the type of application. Additionally, glueing also adds to the strength of the joinery.

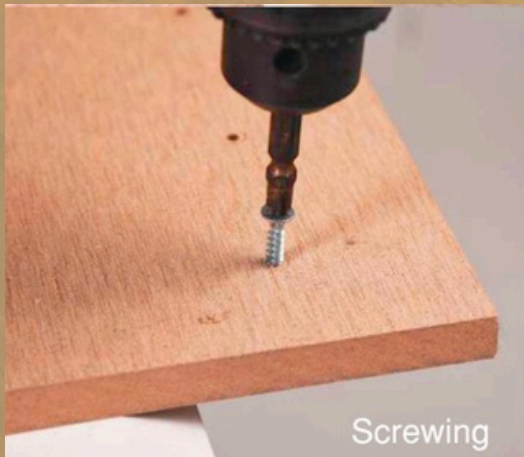

Screwing

The screw holding strength depends on the threading of the screw. Use of a wide head, fully threaded, with a length 2.5 times the thickness of the board is suggested for fastening applications.



Nailing

Nails can be driven directly into the board or through the board. Nail holding strength depends on the type of nail used.



CONCEPT
HDPC BOARD





HDPC 18mm SHEET

HIGH DENSITY POLYMER COMPOSITE

For the HDPC Door Leaf, Frame and Architrave. All we make by Ourselves, so, you can buy all you need in factory.

ISO 9001: 2015 CERTIFIED COMPANY

ADVANTAGES OF HDPC

- Made with European technology
- Composition of 100% Virgin Polymer & Rice Husk
- Surface treatment possibilities like hot stamping, direct painting, high resolution printing, lamination, CNC routing
- Aesthetics similar to wood
- Longer life against weather conditions
- Quick joining than wood at lower cost
- Higher resistance to salt corrosion, moisture and bacteria



CONCEPT

HDPC BOARD

