
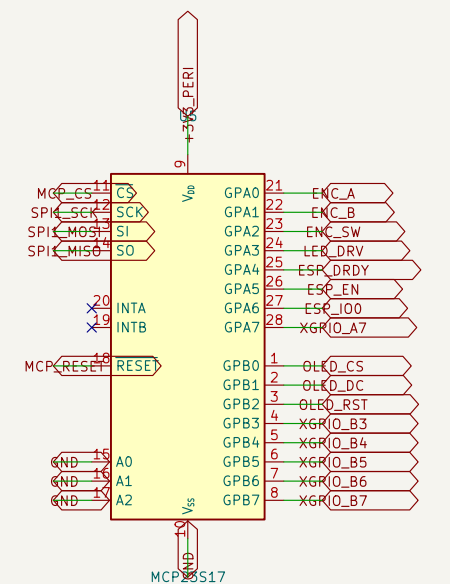

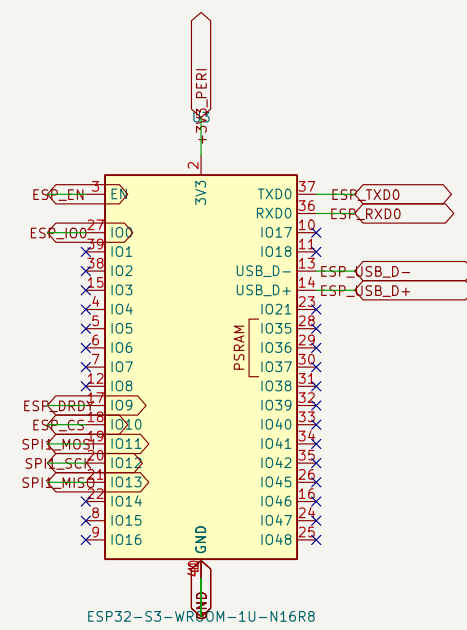
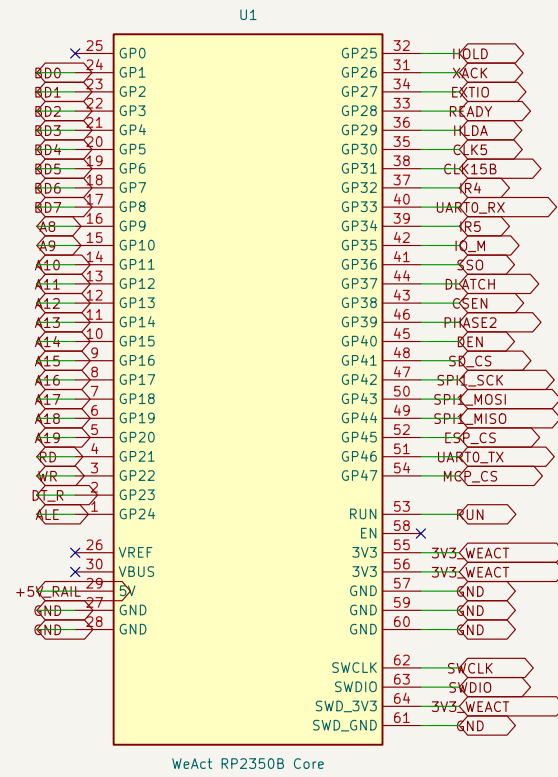
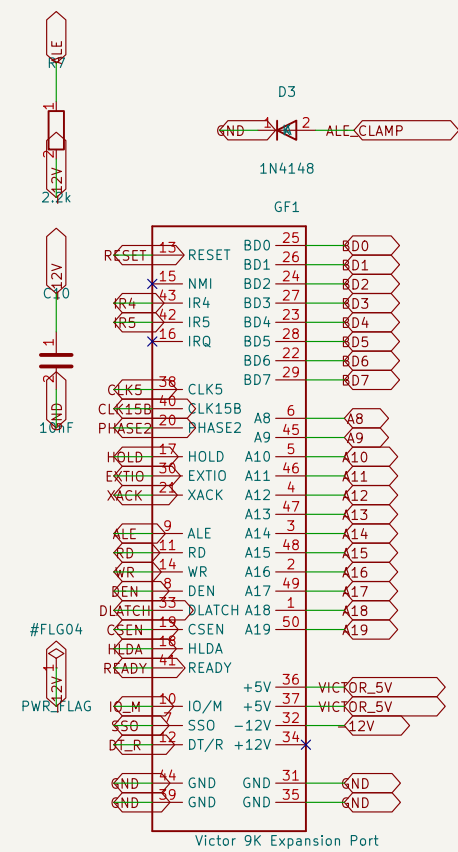


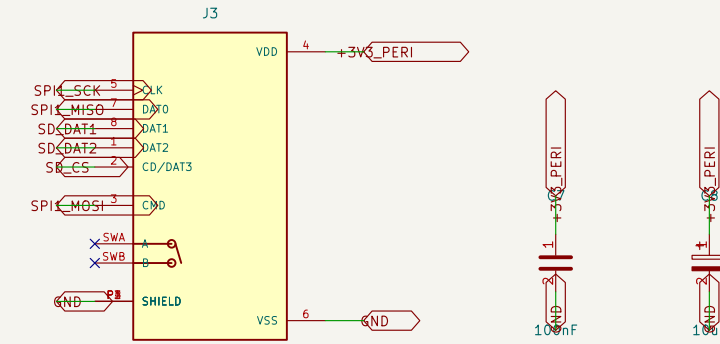



POWER: Vector +5 -> D1

Diagram showing the connections for pins 1 through 9 of the RN1 component:

- Pin 1: +3V3
- Pin 2: SD₂ DAT2
- Pin 3: SE CS
- Pin 4: SPI₁ MOSI
- Pin 5: SPI₁ SCK
- Pin 6: (unconnected, marked with an X)
- Pin 7: SPI₁ MISO
- Pin 8: SD₂ DAT1
- Pin 9: (unconnected, marked with an X)

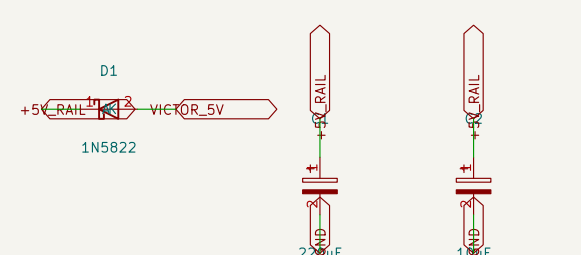

SPI1 shared: DS 25MHz / ESP32 26MHz / MCP23S17 10MHz / OLED = one owner at a time. per-CS		
U1 (LED/encoder/LED) + ESP_ENC/IO/DRDY on MCP23S17 (CS=GP47, <=10MHz) - works with U3		
Remove module GP23 user-key / GP25 user-LED or links (bus pins DT_/HOLD here)		
GP0 = module PSRAM CS- (QMI XIP_CS1n) - socket pad kept NC		
Intergalactic Microsystems		
Sheet: /		
File: v9k_dma_rev2.kicad_sch		
Title: Vctor 9000 DMA Card - rev 2 (WeAct RP2350B + ESP32-S3)		
Size: A2	Date: 2026-07-10	Rev: 2
KiCad E.D.A. 10.0.4		Id: 1/1