




Manual

for

Zilla 3.0 webbing anchor

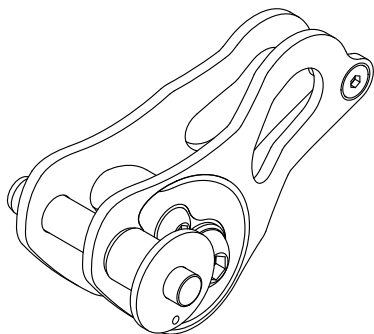

Dear user of the Zilla 3.0,

Thank you for your trust in this Landcruising product. Please read this manual carefully to ensure that your enjoyment of the slackline is long-lasting and safe. Please familiarise yourself with the dangers and limitations of this product before first use. Tensioning and walking longlines in particular, requires your full attention and responsible behaviour.

Your Landcruising-Slacklines team

The Landcruising Zilla 3.0 is the slackline webbing anchor with especially large breaking strength reserve and a high retention of the breaking strength of the webbing. It has been developed particularly with longlines of more than 100m and high working load demands in mind.

The solid side plates made of highly rigid steel and their direct connection to the tested GreenPin shackles provide the high breaking strength.

The patented Evolve main diverter, allows for a very smooth and efficient fixation of the webbing while maintaining compact dimensions. The integrated Roll-Stop reliably prevents any rotation of the main diverter under high loads.

The high tensile and rigid quickpin with 4 retaining balls facilitates the quick, easy and safe installation and removal of the Slackline

1. Specifications

Minimal breaking strength: 100kn
 Maximal working load: 1.8t
 Total weight: 525 grams
 Dimensions: 130 mm x 70mm x 78 mm
 Side plate thickness: 4 mm
 Size of main diverter: effective starting diameter = 60mm
 Main diverter material: anodised AL 7075
 Inner space: 25.5 mm
 Rear connection point space: min. 21 mm
 Max. diameter shackle bolt: 19 mm
 Diameter quickpin: 12.6 mm
 Material quickpin: 17-4 PH Stainless Steel
 Breaking strength of the support bridge: 19kn

Warning

Activities involving the Zilla 3.0 are inherently dangerous. You are responsible for your own actions and decisions.

Before using the Zilla 3.0, please note the following:

- Read this complete manual, contact us in case you have questions or something is not clear
- Familiarise yourself with the behaviour and the operating limits of the Zilla
- Slowly work your way up to higher tensions and longer slacklines
- Understand the potential risks when using the Zilla, especially with longlines
- Look for potential damage and operability before each use of the Zilla 3.0
- Note that you have to be especially careful when using slacklines made from Dyneema and Dyneema hybrid or other high-tech fibres, printed webbing may not be used
- Pay attention to special dangers, such as tilting and skewing of the Zilla or twists in the webbing
- We always recommend an additional backup of the Slackline setup and the hardware

Working Load Limit (WLL)

The Zilla 3.0 may only be used up to a maximum load of 1.8 t (Force of about 18 kN)

The approved working load limit for the slackline webbing must be adhered to.



Every inobservance of all the mentioned warnings can result in serious injury or death!

2. Use according to regulations

The Landcruising Zilla 3.0 is intended exclusively to anchor slacklines 25 mm in width and 4 mm in height. Any other application is forbidden.

This product may only be used by competent and careful persons. Or the usage must be monitored by a competent and careful person.

The Zilla 3.0 may not be used as personal protective equipment (PPE), fall protection, as a climbing safety device or in mountain rescue, it is not certified for these applications.

The maximal working load limit of 1.8 t may not be surpassed during use. The user is responsible to check the operating and working load.




The Zilla 3.0 is not approved for highline setups. The max. height of the slackline has to allow for an injury free jump/drop to the ground.



Do not use to rig highlines!


3. Names of the components

1. Right sideplate
2. Left sideplate
3. Main diverter
4. Quickpin
5. Roll-lock
6. Main bolt
7. Support bridge

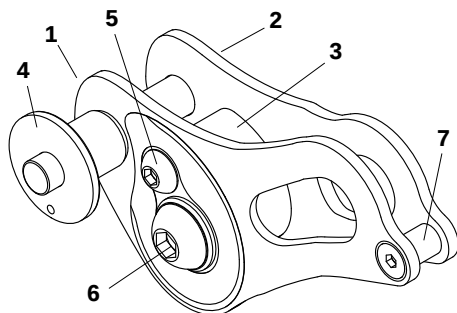

4. Installing the webbing (single wrap)

The normal or single wrap is a safe and reliable installation method for polyester or polyamide webbing up to about 1.5 t max.

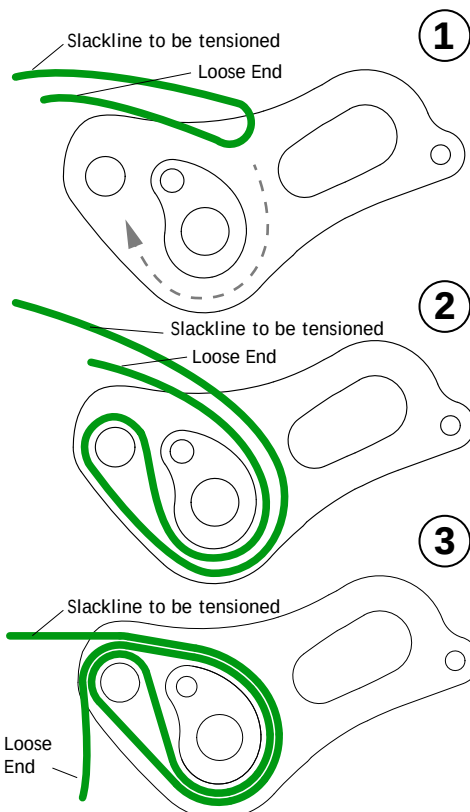

After locking the quickpin the line can be pre-tensioned by hand, by pushing the slackline to be tensioned and pulling on the loose end!
 Keep an eye on a centred guidance of the webbing!


5. Special wrapping techniques

For higher loads, greater than 1.5 t (including potential shock loads), and Dyneema, Vectran or hybrid webbing, the single wrap method is not enough. The following techniques minimize and/or prevent slippage (Landcruising assumes no responsibility)




Stopper knot:

The tightened knot has to be placed as close to the quickpin as possible! (This method is not suitable for Dyneema)

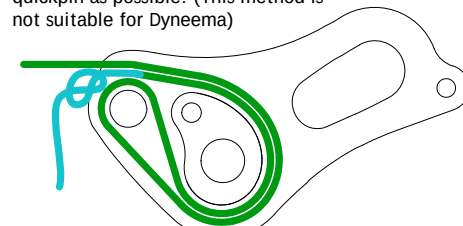

1.5 wrap method:


Pre-tensioning by hand is not possible

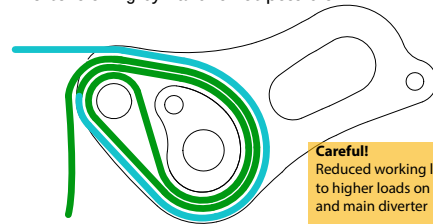

Careful!
 Reduced working load due to higher loads on front pin and main diverter

Double wrap method:


Pre-tensioning by hand is not possible. Especially suitable for Dyneema

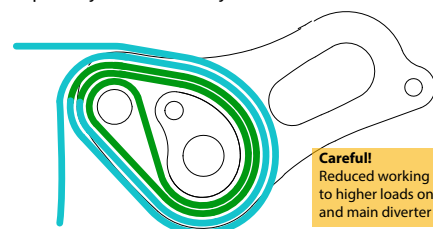

Careful!
 Reduced working load due to higher loads on front pin and main diverter

6. Locking the quickpin

The quickpin must be locked after installing the webbing and before tensioning the slackline!

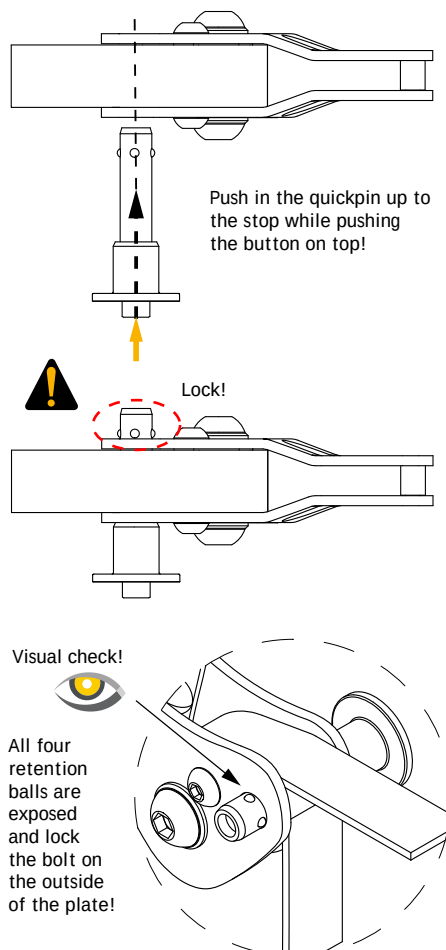


7. Rear support bridge

The support bridge serves the sole purpose of stabilising the two side plates. The breaking strength of the bridge is **about 19 kN**




Do not connect tensioning and anchor elements.
No connection point for backups

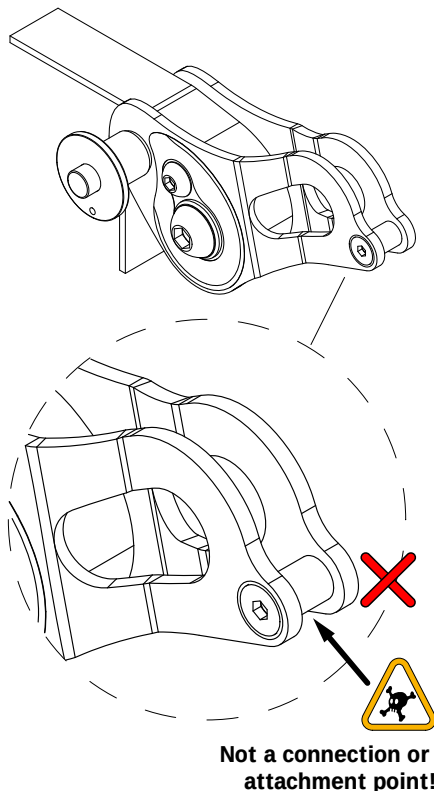

8. Recommended connectors


We recommend the WLL 3.25 t and the WLL 2 t versions of the Van Beest GreenPin shackles.

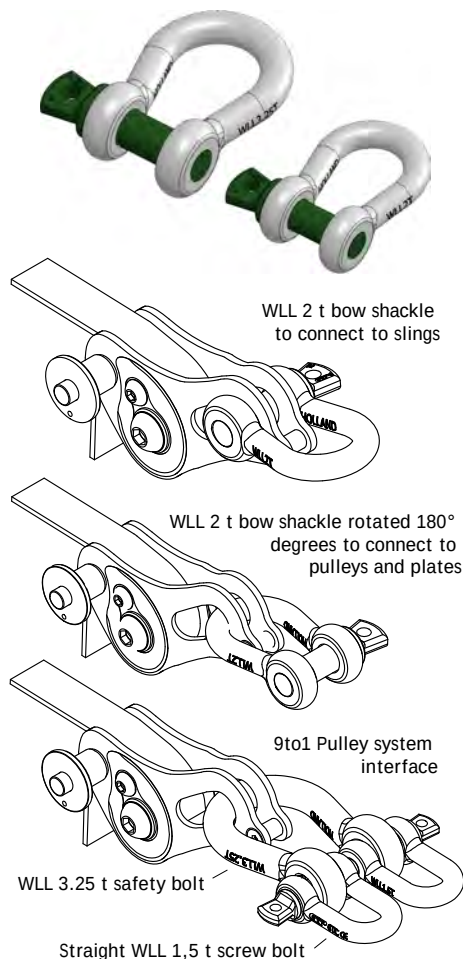

9. Special Dangers


Here a selection of typical misuses is displayed. It is, however, not possible to outline a complete list of all the potential dangers and reasonably foreseeable misuses. A great number of other mistakes and risks can occur. It is because of this, that a careful, thoughtful and responsible use of the product is a basic requirement.

The Zilla 3.0 has to hang freely and may not rest on anything!

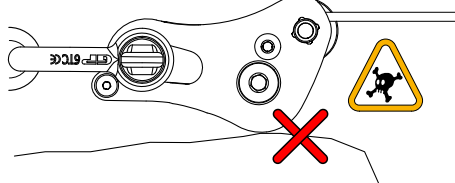

Check for faultless positioning!

No twisting of the webbing!

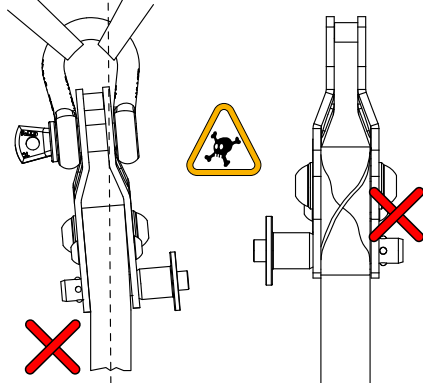

No jamming of the webbing!

10. Storage, Care and service life

The Zilla 3.0 has to be stored and transported in a dry environment. The Zillah has to be dried immediately especially after use in the rain or damp areas. Should the Zilla come into contact with salt water or be used close to salt water, it has to be washed with clear fresh water and dried afterwards. The Zilla may not be greased or oiled.

The service life of the Zilla 3.0 depends on the regularity and intensity of use. Regular inspection of functionality and checking for damage has to be done before every use.

- Are all the screws tight?
- Are the side plates free from damage, not deformed and parallel to each other?
- Is the main diverter free from damage?
- Is the front pin working correctly?

If necessary the Zilla has to be repaired or even replaced. Please contact us when questions arise.

11. Guarantee

Legal warranty applies. Excluded are: normal wear (especially on varnish and surfaces), modifications/changes (especially unauthorised loosening of the screws) and damage caused by use other than the intended purpose.

All screw connections have been secured with thread adhesives. Unauthorised opening/loosening is forbidden.

Replacement of unused new products only.

12. Disclaimer

Landcruising GbR does not assume liability for damage caused by improper handling of the product and particularly not when the warning notices were ignored. By way of purchasing the Zilla 3.0 you confirm that you have acknowledged and understood these warning notices and notes. Please provide this manual together with the device to third persons.

Slacklining can lead to serious injury or even death. The use of the Zilla 3.0 Webbing anchor is the customer's responsibility. Every person, using the Zilla 3.0, is individually responsible for the acquisition of the right techniques. Every user carries the full risk and fully accepts the complete responsibility for all damage and injuries of each kind, which result from using the Zilla 3.0. The Zilla 3.0 is solely intended for slacklining and may not be used for any other purpose. After every use the Zilla 3.0 is to be checked for damage, according to point 10 and disposed of if damaged or worn.

As manufacturers we do not assume liability for bodily, consequential and incidental damage that results in the use of the Zilla 3.0.

If you do not want to or cannot carry this risk, do not use this product. Children require the supervision of their guardian/parents.

13. Manufacturer contact details

Please contact us via email, telephone or in person to discuss questions, feedback and suggestions.

Landcruising Slacklines
GbR mit Damian Jörren und Stefan Junghannß
Meschwitzstr. 15
01099 Dresden
Deutschland

www.landcruising-slacklines.de
info@landcruising-slacklines.de
www.facebook.com/landcruising.slackline

Phone: 0049-351-86276514
(Office hours usually 10am to 5pm on working days, Central European Time)