


Single Bowl Farmhouse Fireclay 33 in. Kitchen Sink in Gloss White with Drain and Grid

Item: KSA-493FC

- Included: Stainless Steel Kitchen Sink Bottom Grid and Brushed Nickel Basket Strainer Drain
- Thompson Traders' fireclay sinks offer a traditional style of a classic farmhouse sink
- Farmhouse installation is made easy with 90-degree side walls and a flat bottom
- Featuring a deep, single bowl allows for optimal space to clean dishes, soak pots, prepare meals, and more
- Thompson Traders' fireclay sinks are finished with a fired-on glaze, creating a dense and ultra-durable material that is resistant to stains, chips, scratches, and rust
- The sink is easy to clean with its non-porous and thick surface
- Protected under Thompson Traders' Limited Lifetime Warranty

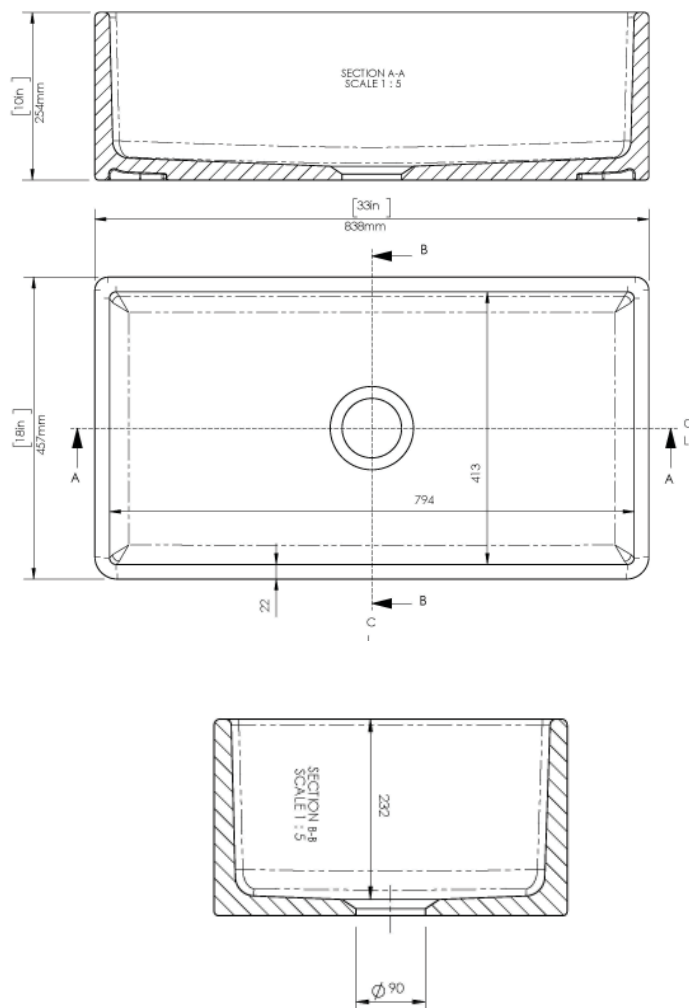

FAUCET DESCRIPTION

- Pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Quick connect installation - Duralock™
- Power Boost™ spray technology
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- Faucet designed for handle to be mounted on right side

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for single handle faucets


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA ♿ for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations

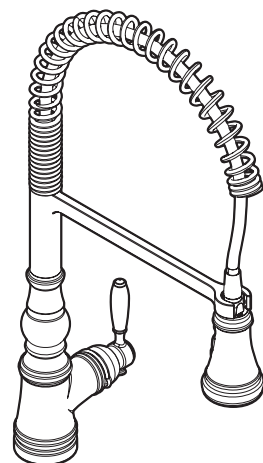

Weymouth®
Single Handle Pre-Rinse Spring
Pulldown Kitchen Faucet

Models: S73104 series

NOTE: this faucet is designed to be installed through 1 hole, 1-1/2" (38mm) min. dia.

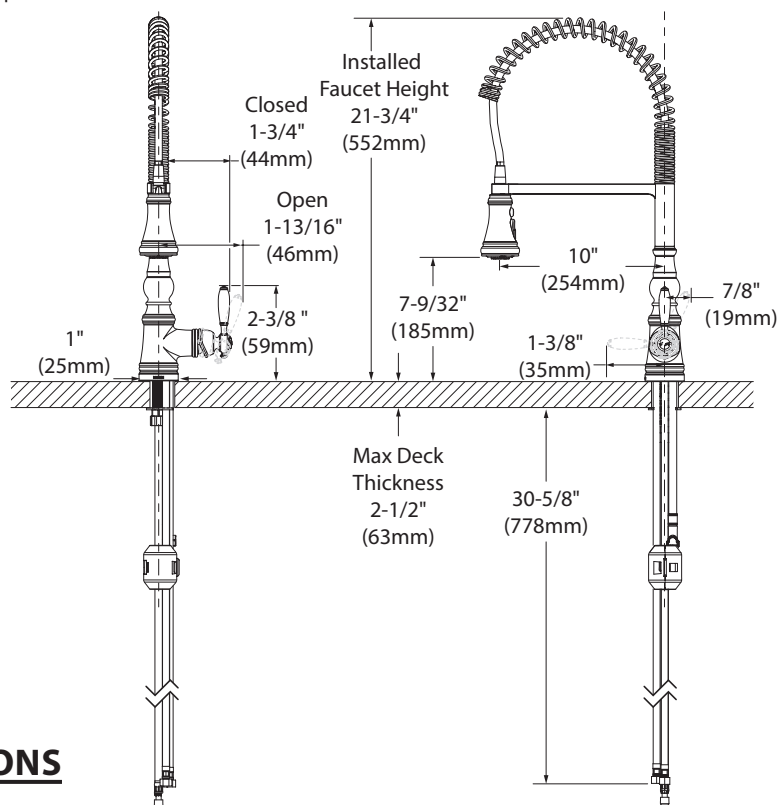

CRITICAL DIMENSIONS

(DO NOT SCALE)

Manual and Metering Faucets

Product Type

Wall Mounted Single Hole Single Supply Sink Faucet

Features & Specifications

- Single Hole
- 6" S Type Swing Spout
- 2.2 GPM (8.3 L/min) Aerator
- 2-3/8" Lever Handle
- Quatum Compression Operating Cartridge
- 1/2" NPT Female Thread Inlet with Integral Wall Flange
- ECAST® design provides durable brass construction with total lead content equal to or less than 0.25% by weighted average

Performance Specification

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

Codes & Standards

- ASME A112.18.1/CSA B125.1
- Certified to NSF/ANSI 61, Section 9 by CSA
- California Health and Safety Code 116875 (AB1953-2006)
- Vermont Bill S.152
- NSF/ANSI 372 Low Lead Content
- ADA ANSI/ICC A117.1

Job Name _____

Item Number _____

Section/Tag _____

Model Specified _____

Architect _____

Engineer _____

Contractor _____

☐ Submitted as Shown ☐ Submitted with Variations

Date _____




ECAST®

ECAST products are intended for installation where state laws and local codes mandate lead content levels or in any location where lead content is a concern.

Manual and Metering Faucets

Architect/Engineer Specification

Chicago Faucets No. 332-ABCP, Wall Mounted Single Hole Single Supply Sink Faucet, Chrome Plated solid brass construction. 6" Center to Center S Type Swing Spout. 2.2 GPM (8.3 L/min) Pressure Compensating Softflo Aerator. 2-3/8" Metal Lever handle(s) with Eight Point Tapered Broach and Secured Blue Button. Quatern™ rebuildable compression cartridge, opens and closes 90°, closes with water pressure, features square tapered stem. 1/2" NPT Female Thread Inlet with Integral Wall Flange. ECAST® construction with less than 0.25% lead content by weighted average. This product meets ADA ANSI/ICC A117.1 requirements and is tested and certified to industry standards: ASME A112.18.1/CSA B125.1, Certified to NSF/ANSI 61, Section 9 by CSA, California Health and Safety Code 116875 (AB1953-2006), Vermont Bill S.152, and NSF/ANSI 372 Low Lead Content.

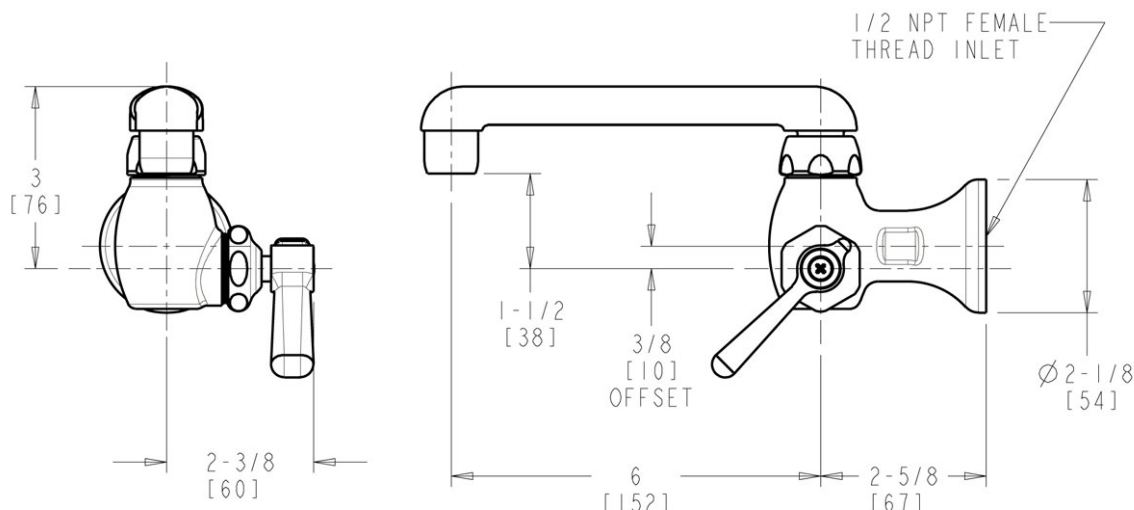

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive
Des Plaines, IL
P: 847/803-5000
F: 847/803-5454
Technical: 800/TEC-TRUE
www.chicagofaucets.com

10 YEAR MANUFACTURER'S LIMITED WARRANTY

All parts of this Kingston Brass faucet are warranted to the original retail purchaser to be free from defects in material and workmanship for a period of Ten(10) years from the date of purchase as shown on the purchaser's receipt.

This warranty is limited to defective parts only, labor charges and/or damage resulting from improper installation, repair or replacements, as well as incidental and consequential damages connected therewith are excluded.


Any damage to this faucet as a result of misuse, abuse, neglect, accident, or improper installation or any use not consistent with the instructions furnished by us, will void this warranty. Replacement parts can be obtained from your local dealer. Freight cost is not covered by manufacturer.

CAUTION!!!

1. Water lines must be completely flushed before use, to avoid debris & clogs in your water system leading to reduction of water flow and mal-functioning.
2. Warranty is void if water lines are not flushed prior to use and installation of the new faucet.
3. Use of abrasives of any strength may damage the finish of the faucet and void the product warranty.
4. Do not over tighten your faucet on the countertop during installation. The valve assembly is tested to meet the standards set by ASME A112.18.1 sec 5.8 which is listed at 100 LBF. However, over-tightened or over-torqued nuts may lead to cracks on the valve and will eventually lead to leaking and water damage.
5. Before installation of the faucet to the desired fixture, you need to secure and anchor your console, sink, tub, or vanity cabinet firmly to the wall and to the floor. To ensure your fixture or faucet mounting surface cannot be moved, before installation of the faucet, please test to see if the cabinet or vanity can be moved by hand or body weight. If the faucet mounting fixture is not secure and anchored, it will eventually crack the valve and cause leaking leading to property damage. In order to avoid this, be sure to secure your installation surface. Do not use any Power Tools for assembly and installation which can cause internal fractures to the fixture.

KINGSTON


KITCHEN & BATH

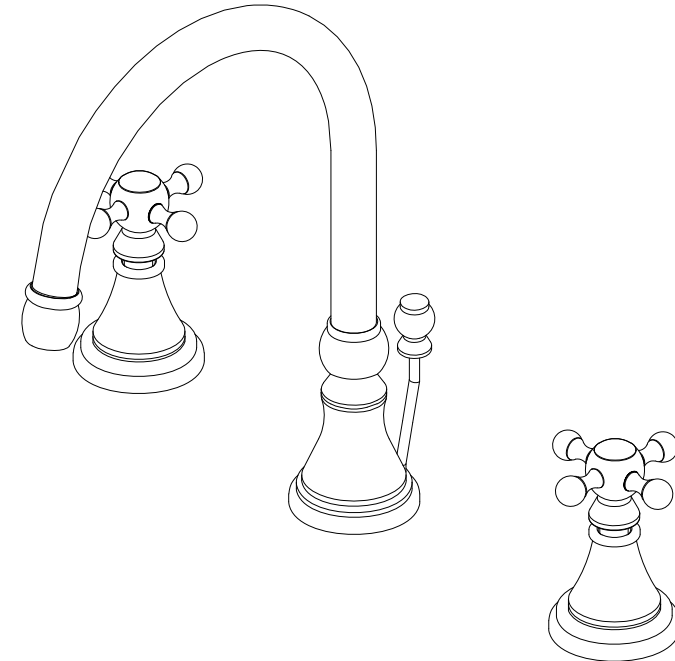

PROBLEMS SHOOTING

PROBLEM	CAUSE	CORRECTIVE ACTION
Leaks underneath handle	Bonnet nut has come loose	Remove the handle and tighten the bonnet nut
Leaks from the spout	Valve seat and spring are worn	Replace the valve seat and spring
Inconsistent water flow pattern	Aerator is dirty or aged	Release aerator and check on rubber gasket if aged or replace with a new aerator
Faucet is dirty	Caused by stubborn water spot	Clean with mild soap and warm water as often as possible
Handles work backward	Handle installed backward	Rotate the right stem stop assembly 180 degrees

Parts:

Washer & Metal Washer	Washer & Flood Protec Safety Check Valve	Cone Washer & Coupling Nut	Pop-Up
			
2 Pcs	2 Pcs	2 Pcs	1 Pc

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS

TECHNICAL SUPPORT E-mail: service@kingstonbrass.com

12775 Reservoir Street, Chino, CA 91710

CODE APPROVAL: LA#M-000018


KINGSTON

KITCHEN & BATH


INSTALLATION INSTRUCTIONS Widespread Lavatory Faucet with Pop-Up

BEFORE BEGINNING INSTALLATION:


1. Flush plumbing lines to clear any debris.
2. Shut off both supply lines after flushing.

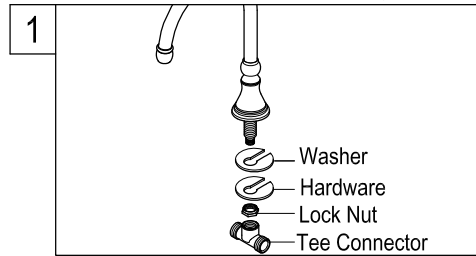


1. Remove the tee connector and spout mounting hardware from spout.

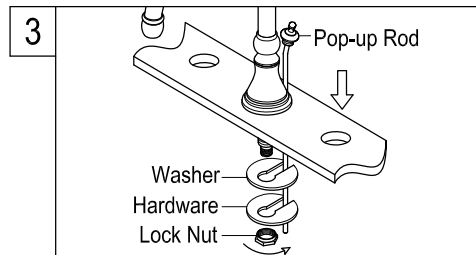


3. From the top of the sink, insert the spout base ring (if applicable) and spout through the center hole, slip the washers back on the spout shank, make sure notch on washers is pointing towards the back wall, secure by tightening the lock nut.

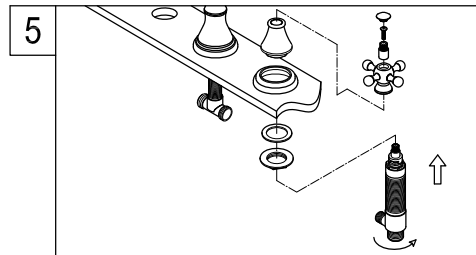


5. Thread locknut and insert washer to valve assembly, make sure to thread all the way to the bottom of the threads, insert from the bottom, while holding it in position insert flange and attach handle, adjust flange so handle can move freely, tighten lock nut from bottom, making sure valve assembly port is pointing to spout.

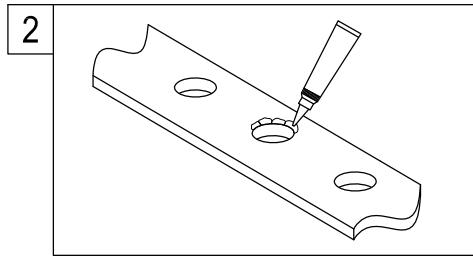

2. Sparingly apply a small bead of silicon caulking around the center hole on top of the sink (do not use Plumber's Putty as it may damage finish and void warranty).

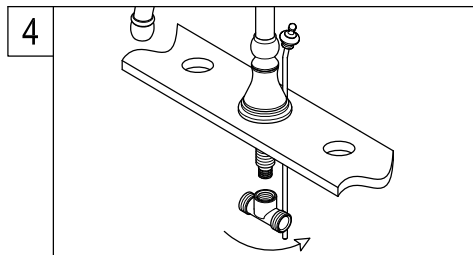


4. Place the tee connector to end of spout and thread tee onto spout shank.

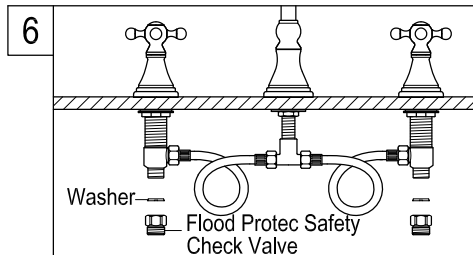

6. Attach flexible hoses to outlet port of valve assembly and tee connector, you may need to loop flexible hoses as shown on graphic use and be caution not to over tighten, apply Teflon to inlet port of stem assembly then place rubber washer on inlet port and thread flood Protec safety check valve, be careful not to over tighten.

Need Tools:




Basin Wrench




Adjustable Wrench




Teflon Tape




Silicone Sealant




Screwdriver

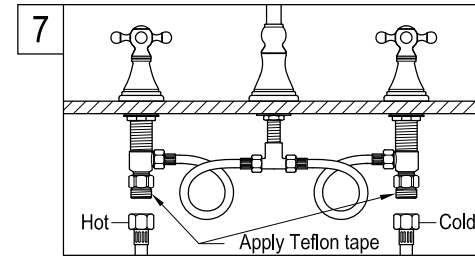

7. Apply Teflon tape to threads on flood Protec safety check valve and thread the hot and cold supply lines.

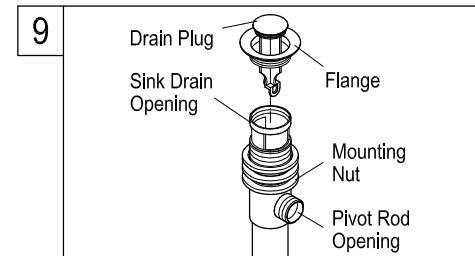


9. Apply silicone to bottom side of flange. Install flange body up through the drain opening, hold the drain flange body in position with pivot rod opening facing the back of sink and hand tighten the mounting nut. Be sure to clean excess silicone.

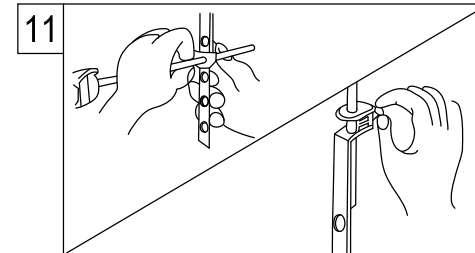


11. Guide the pivot rod through one of the holes on the lift rod strap and secure it with the spring clip. Then adjust the height of the lift rod by resetting the clevis screw. With lift rod in position on the faucet, insert lift rod through lift rod strap and secure with the clevis screw.

Warning!!!


- Do not over-tighten nut during installation.
- Over-tighten may crack the valve and cause severe leak.

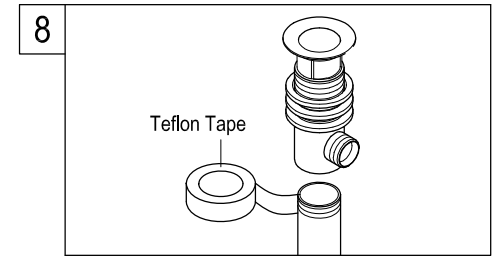

8. Thread mounting nut and bottom gasket onto drain body. Wrap top threaded end of the drain body with Teflon tape.

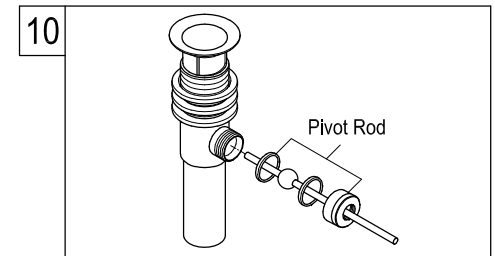


10. Place pivot rod into pivot rod opening. Slide pivot nut over pivot rod and thread it on the drain body. Tighten firmly.

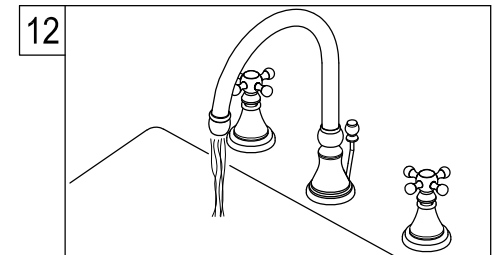


12. Once connections have been made turn on water supply and check for leaks. once you have shut-off the water, remove the aerator and clean it of any debris and re-install Caution, do not open any of the faucet valves while the aerator has been removed, doing this will activate the Anti-flood safety mechanism thus preventing the faucet from working until the safety valve has been replaced.

Parts:

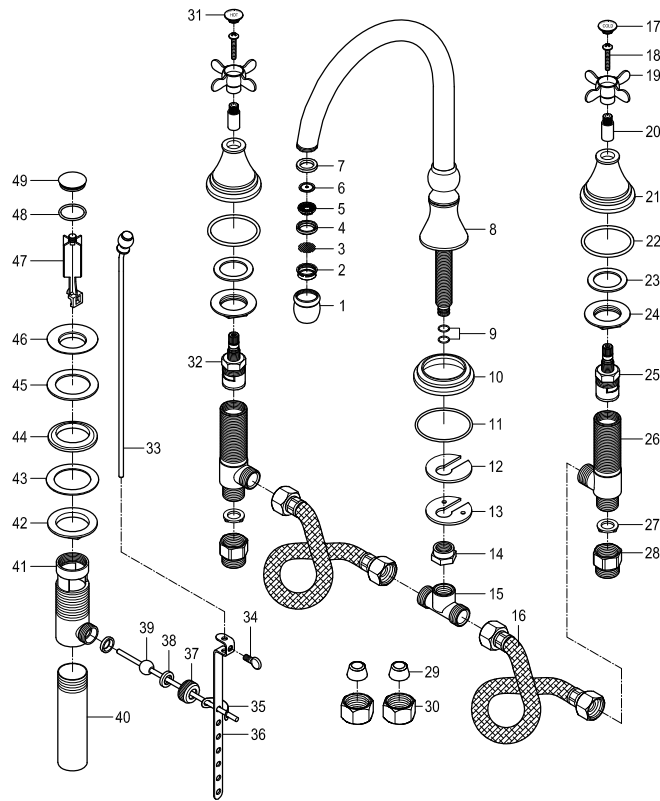

Replacement Parts:

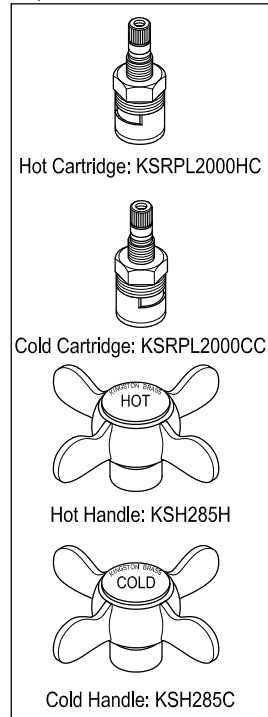

Kingston Brass™ Faucets

(10) YEARS LIMITED WARRANTY

Kingston Brass warrants its faucets to be flawless during normal residential use. If the faucet should leak or drip during normal use, Kingston Brass will, free of charge, mail to the original owner the cartridge necessary to put the faucet in good working condition. All warranty parts to be shipped freight prepaid ground service. Customer will be responsible for all warranty part freight charges if express shipping is requested. This warranty applies only to Kingston Brass Faucets installed in the United States of America only. Kingston Brass also warrants all other aspects of the faucet or accessories (except Oil Rubbed Bronze and Dark Bronze Finishes on color changes as part of the normal living finish behavior) to be free of defects in material and workmanship during normal residential use within (10) years from the date of purchase to its original owner. If a defect is found in normal residential use, Kingston Brass will, at its selection, repair, provide a replacement part or product, or make appropriate adjustment. Damage to a product caused by accident, misuse, or abuse is not covered by this warranty. Improper care and cleaning will void the warranty. Proof of purchase (original sales receipt) must be provided to Kingston Brass with all warranty claims. Kingston Brass is not responsible for labor charges, installation, or other incidental or consequential costs. In no event shall the liability of Kingston Brass exceed the purchase price of the faucet.

SPECIAL FINISHES:

Warranty does not apply to special or living surface finishes such as Oil Rubbed Bronze, Dark or Old Bronze as living finishes will change over time as a result of a normal process and may look different than at the time of purchase, therefore these items are warranted for functionality only. Oil Rubbed Bronze, Dark or Old Bronze components may vary in shade at the time of shipment. This warranty is limited to the replacement of defective parts only, labor charges and/or damage resulting from improper installation, repair or replacements, as well as incidental and consequential damages connected therewith are excluded. Any damage to this faucet as a result of misuse, abuse, neglect, accident or improper installation or any use not consistent with the instructions furnished by us, will void this warranty.

CAUTION!!!

1. Prior to installing the faucet, water lines must be flushed clean of debris and particles that may be present to avoid the clogging of cartridges or aerator causing mal-function, leakage or reduce in flow.
2. Warranty will be void if water lines are not properly flushed prior to installing the faucet.
3. Use of abrasives cleaners of any strength may damage the finish of your faucet and will void this warranty. To obtain warranty service, contact the Dealer, Plumbing Contractor, Home Center or E-tailer, or contact Kingston Brass by calling 1-877-252-7277 or write to Attn: Warranty Department, 12775 Reservoir Street, Chino, CA 91710.

Kingston Brass™ Cast Iron Tubs, Acrylic Tubs, Toilets, Vessel Sinks, Wash Basins, and Stainless Steel Sinks.

ONE-YEAR LIMITED WARRANTY

KINGSTON BRASS Sinks, tubs and toilets are warranted to be free of defects in material and workmanship for one year from date of installation. Kingston Brass will, at its selection, repair, replace or make appropriate adjustment where Kingston Brass inspection discloses any such defects occurring in normal usage within one(1) year after purchase to its original owner. Proof of purchase (original sales receipt) must be provided to Kingston Brass with all warranty claims. Kingston Brass is not responsible for removal or installation costs. Use of in-tank toilet cleaners will void the warranty.

To obtain warranty service, contact the Dealer, Plumbing Contractor, Home Center or E-tailer, or contact Kingston Brass by calling 1-877-252-7277 or write to Attn: Warranty Department, 12775 Reservoir Street, Chino, CA 91710.

Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state/province to state/province.

* Never use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome. This will void the warranty.

CARE AND MAINTENANCE OF YOUR FAUCET

Your Kingston Brass faucet has been finished to the most strict standards; however, due to the high content of minerals in the water, your finish may appear dull and tarnished after time. These are some do's and don'ts to maintain the luster on your faucet for many years to come.

DO






1. Use a silicon based caulking when installing.
2. Clean your faucet with only a mild soap and water solution.
3. Dry your faucet after using it.
4. Give it a coat of Carnauba Wax periodically.

DON'T

1. Use plumbers putty when installing the faucet.
2. Use any abrasive cleaning agents.



It may seem like a very simple and short list but it is that simple to maintain your faucet, looking shiny and new.

If your faucet is already looking somewhat dull and tarnished, before replacing it, try cleaning it with a 50/50 solution of vinegar and water, you may need to soak some rags and wrap around those stubborn areas, leave overnight and rinse completely in the morning, apply Carnauba wax once you have removed the mineral deposits.

1	 BEFORE INSTALLATION. (1) Do not turn on the water during installation of the  FLOOD PROTEC™ Safety Check Valve Fitting. (2) Do not use the  FLOOD PROTEC™ Safety Check Valve Fitting if the product does not include a water restrictor and washer.  FLOOD PROTEC™
2	 Turn off water shut-off valves completely and disconnect the supply line at the end that is attached to your faucet stem.
3	  Apply Teflon tape to the male threads on your  FLOOD PROTEC™ safety check valve as well as on the faucet stem and thread safety check valve, be careful not to over tighten.
4	  Thread supply line onto the  FLOOD PROTEC™ safety check valve. Caution: Hand tighten the nut on the supply line then tighten an extra ¼ turn with a wrench. Turn on your water supply and check for leaks.
This pair of  FLOOD PROTEC™ SAFETY CHECK VALVES, once installed properly, will automatically stop the water supply to the faucet if water flow suddenly increases to over 3.0 GPM/11.3 LPM, this increase in water flow may be a sign of leaking due to faucet failure. This SAFETY CHECK VALVE is designed to prevent property damage caused by a severe leak, and it is intended for onetime use. Do not reuse after it has been triggered to shut off water supply to your faucet.	

KS2980,1,2,3,5,6,7,8BEX

Widespread Lavatory Faucet With Brass Pop-Up

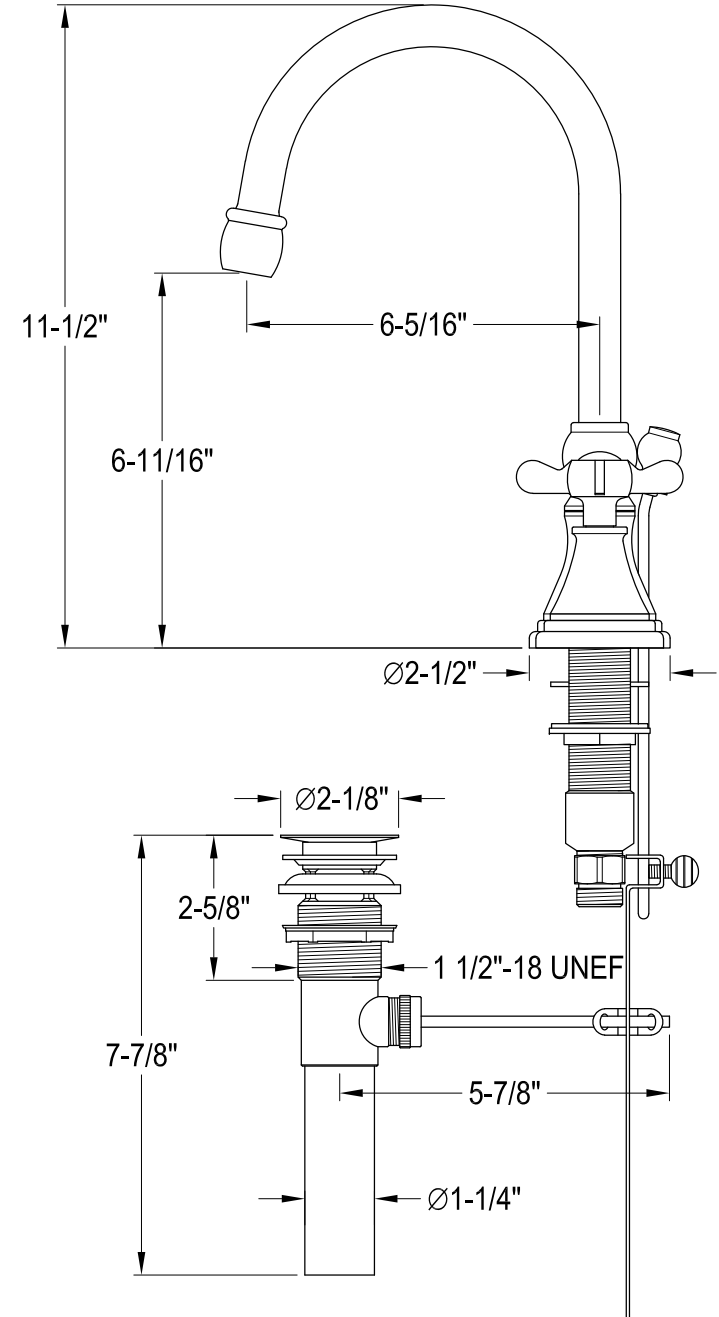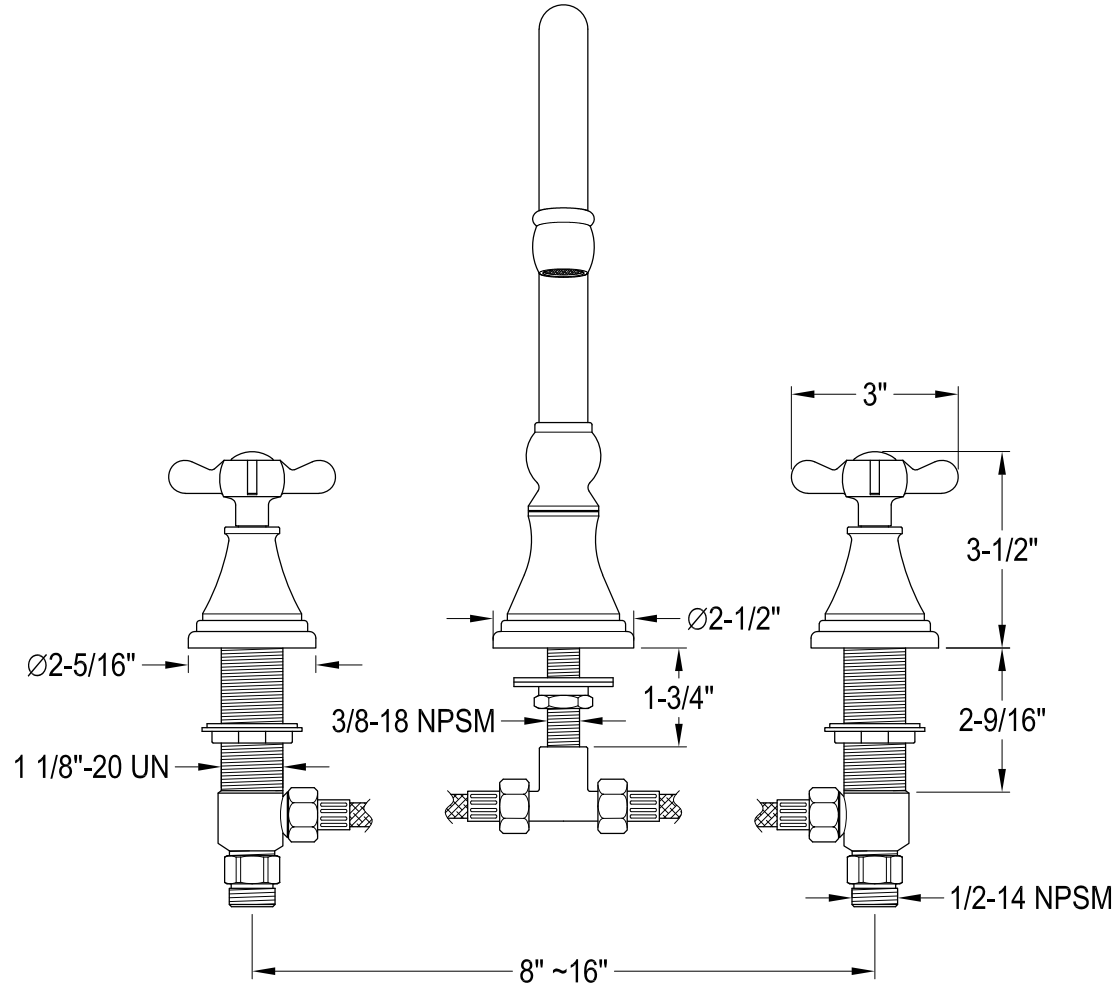

Exposed Shower Installation Guide

EXPOSED PIPE SHOWER INSTALLATION GUIDE

BEFORE YOU BEGIN ** IMPORTANT **

Before installing, read entire installation instruction. Observe all local building and safety codes.

For the following installation instructions it is assumed that the water supply lines have been installed in the desired location behind the finished wall and are accessible for shower installation.


We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures.

INSTALLATION STEP

1. Assemble the shower riser as drawing, to use Teflon tape on pipe threads.
2. Assemble the loop, wall support tube and wall flange together. If necessary to cut the extra length of tube.
3. Attach the support to shower riser and screw the flange on wall.
4. Attach the hand shower cradle to shower riser.
5. Place Teflon tape on the 1/2" pipe thread in the shower wall and thread on the faucet couplers. Allow tape to cure for 24 hours before use.
6. Attach the faucet body to the couplers. Using faucet top connect nut and cone seal to connect the shower riser and faucet. Install the faucet handles.
7. Place Teflon tape on the thread of shower riser. Attach the shower head to the top of the riser with wrench.
8. To install a hand-held shower. Using included wall mount bracket to install on desire location. Attach the hand-held shower holder on bracket and screw it with set screw from bottom.
9. Attach the shower hose to faucet body with rubber washer.
10. Turn on the water supply and open the faucet valves. Check for any leaks. If leakage occurs, tighten connections again as necessary. Let the water flow through the shower hose for approximately 30 seconds to clear out debris and dirt.
11. Connect the hand-held shower with shower hose and check leaks.

COMPLETE INSTALLATION


Note: All connections nuts, do not tighten more than 1/4 turn beyond hand tight.

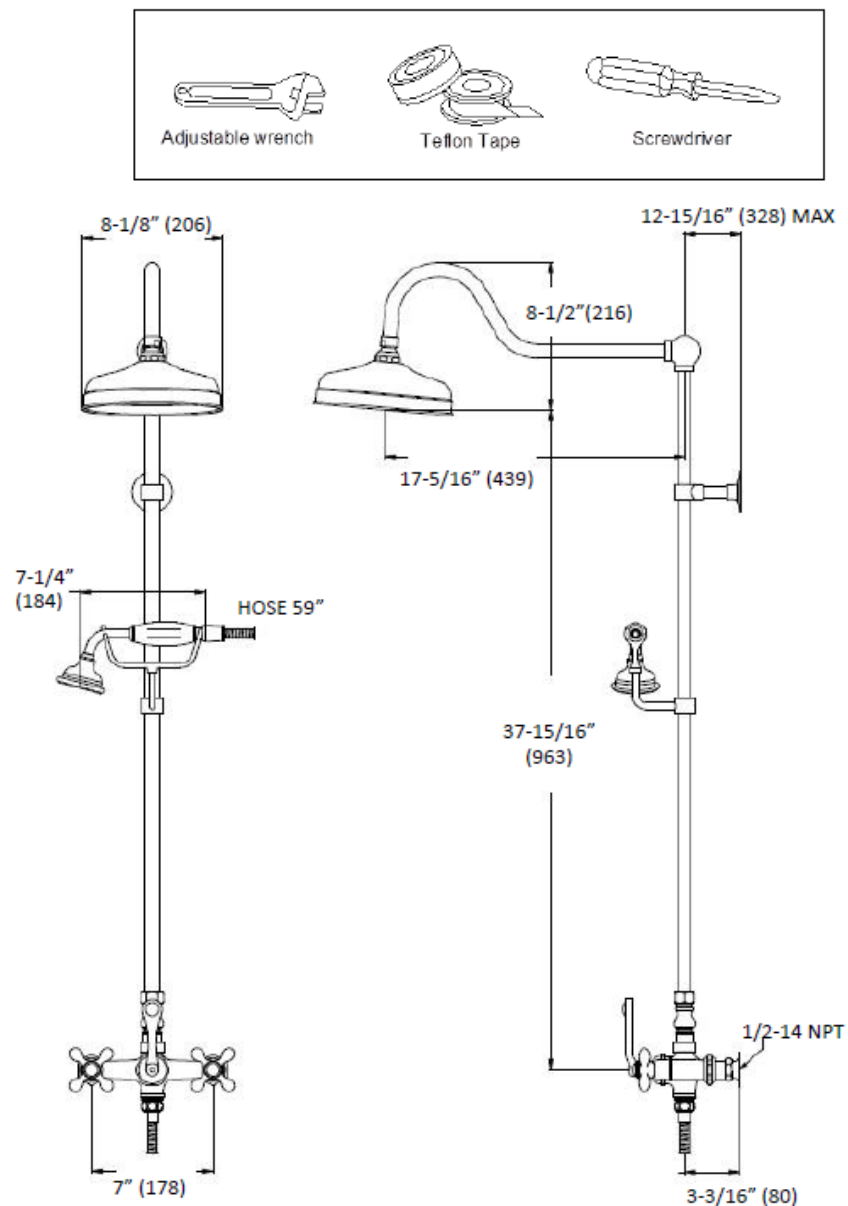



Exposed Shower Set by Randolph Morris

Item #: RMHL2

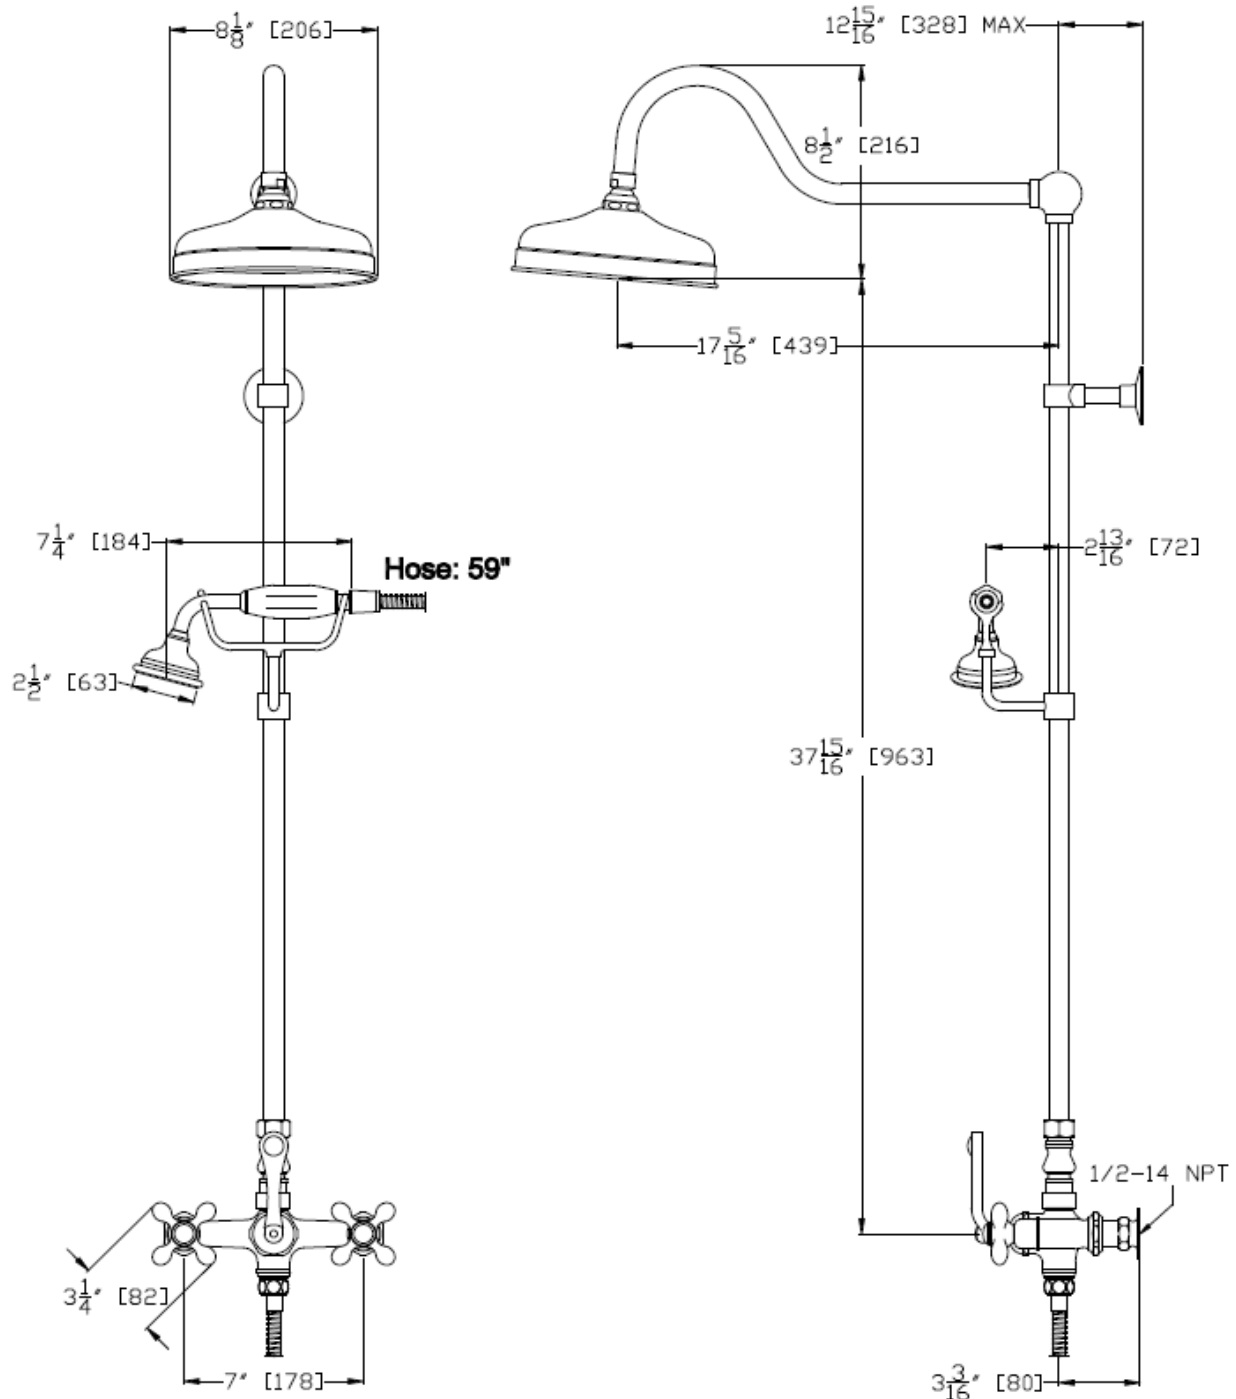


All products and specifications are subject to change without notice. Randolph Morris is not responsible for typographical and/or dimensional errors. Typographical errors are subject to correction.

Note: Rough-in dimensions may vary +/- 1/2" and are subject to change. No responsibility is assumed by Randolph Morris.



Exposed Shower Set by Randolph Morris

Item #: RMHL2

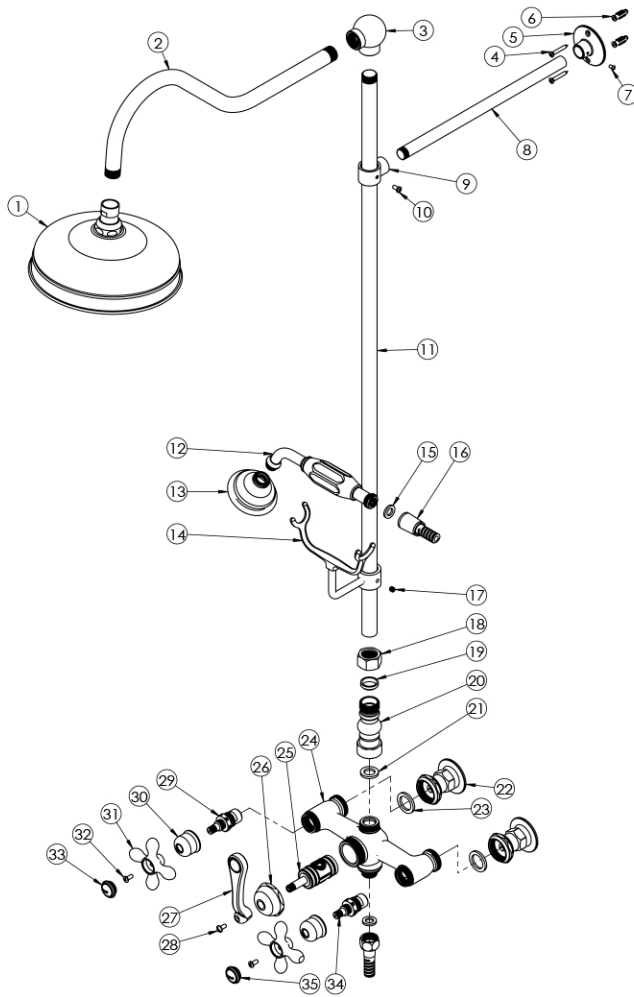

No.	Part Name	Part No.	FINISH
1	Shower head	HLN-016-8A	Y
2	Shower arm	HL-2980	Y
3	Elbow	HL-4548	Y
4	Screw	HL-4602-6	Y
5	Escutcheon	HL-4602-3	Y
6	Anchor	HL-4602-5	
7	Screw	HL-4602-4	Y
8	Connect tube	HL-4330-12	Y
9	Loop	HL-2722M	Y
10	Screw	HL-1428	Y
11	Riser pipe	HL-43082-36	Y
12	Hand held	HL-4364+5702	Y
13	Shower head	HL-3710	Y
14	Cradle	HLP-0144R	Y
15	Washer	HL-5002-1	
16	Hose	HL-5002	Y
17	Set screw	HL-1420	
18	Locknut	HL-3416-1	Y
19	Seal	HL-1906	
20	Adaptor	HLN-803	Y
21	Washer	HL-1830	
22	Wall coupler	HL-5314	Y
23	Washer	HL-1831	
24	Faucet body	HL-31BD	Y
25	Diverter	HL-308-DVT/32	Y
26	Escutcheon	HL-2011	Y
27	Handle	HL-2370	Y
28	Screw	HL-1410	Y
29	Cartridge - Hot	HL-162M-32TH	
30	Escutcheon	HL-4407	Y
31	Cross Handle	HL-2365	Y
32	Screw	HL-1405	
33	Index- Hot	HL-2514-H	Y
34	Cartridge - Cold	HL-162M-32TC	
35	Index- Cold	HL-2514-C	Y

All products and specifications are subject to change without notice. Randolph Morris is not responsible for typographical and/or dimensional errors. Typographical errors are subject to correction.

Note: Rough-in dimensions may vary +/- 1/2" and are subject to change. No responsibility is assumed by Randolph Morris.



Cast Iron Clawfoot Tub Foot Installation Guide

Before You Start:

We recommend using a professional plumbing installer if you are unfamiliar with vintage style bathroom fixtures and plumbing. Vintage Tub & Bath will not be responsible for any damage to the floor, walls, plumbing, or personal injury during installation. Please review all local plumbing and building codes to be sure your purchase is code compliant for your area.

Tools Needed: 11/16" wrench

Materials Included: *Tapered* rubber shims, 4 feet, 4 bolts, 4 flat washers, 4 lock washers, 4 nuts

1. Remove plastic wrapping from tub
2. Cut and remove strapping from around tub
3. Remove foam rim protector
4. Check tub paint and porcelain for any imperfections or damage
5. Remove and inspect the feet for any scratches or rust
6. Fold and lay down a blanket on the floor to place the tub on when you remove it from the crate
7. NOTICE: If you have purchased a roll top tub, be sure to place some form of blocking (for example a book) under the rim during Step 8 so that you will be able to get your hands under the tub to flip it back over when finished
8. Remove the tub from the crate and place it rim down on the blanket ***The tub will now be resting upside down so that the tub bottom should be pointing at the ceiling***
9. Set out feet so that the letter on the bottom of the foot corresponds to the letter that is located beside the lugs on the bottom of the tub.
10. Take bolt and insert into the lug so that the threads are pointing towards the ceiling
11. Take foot and place over bolt and gently lower so that the foot rests on both the tub and the tongue and lug (The tongue is the flat area that extends back from the foot and consists of the mounting hole for the bolt)

*****CAUTION: the foot can scratch the side of the tub if it is not placed gently over the bolt!*****

12. Place flat washer over bolt on top of the foot tongue
13. Place lock washer over flat washer
14. Place nut over lock washer and tighten it to within 1/8" of the lock washer (this will allow you enough space to adjust the foot as needed)
15. IF THE FOOT LIES FLUSH on both the side of the tub and between the foot tongue and lug, continue to STEP 20
16. IF FOOT DOES NOT LIE FLUSH loosen the nut so that it rests approximately 1/2" away from the washer
17. Take one of the provided shims and place it between the foots tongue and tubs lug

*****NOTICE: The shims are tapered so be sure to insert the shims so that the largest end of the shim rest in the largest space between tongue and lug*****

18. IF FOOT LIES FLUSH on both surfaces continue to STEP 20
19. IF FOOT DOES NOT LIE FLUSH, repeat process in STEP 17 until you've reached the desired outcome
20. Once foot lies flush on both the side of the tub and between the tongue and lug, tighten the nut

*****CAUTION: DO NOT OVERTIGHTEN NUT! Overtightening will cause the bolts to strip and become unusable*****

21. After nut is tightened, gently shake the foot to make sure there is no movement in the foot
22. Flip the tub rightside up and make sure that it rests stationary on the floor


*****When refliping tub, be sure to not put all of the tubs weight on only two tub feet*****

23. If the tub does not remain stationary, establish which corner is causing the unevenness, flip tub back over, and shim the appropriate corner.
24. Repeat Steps 22 & 23 until desired outcome is reached.
25. ENJOY YOUR NEW TUB!



Deck Mount British Telephone Tub Faucet with Handshower
by Randolph Morris

Item #: RM462

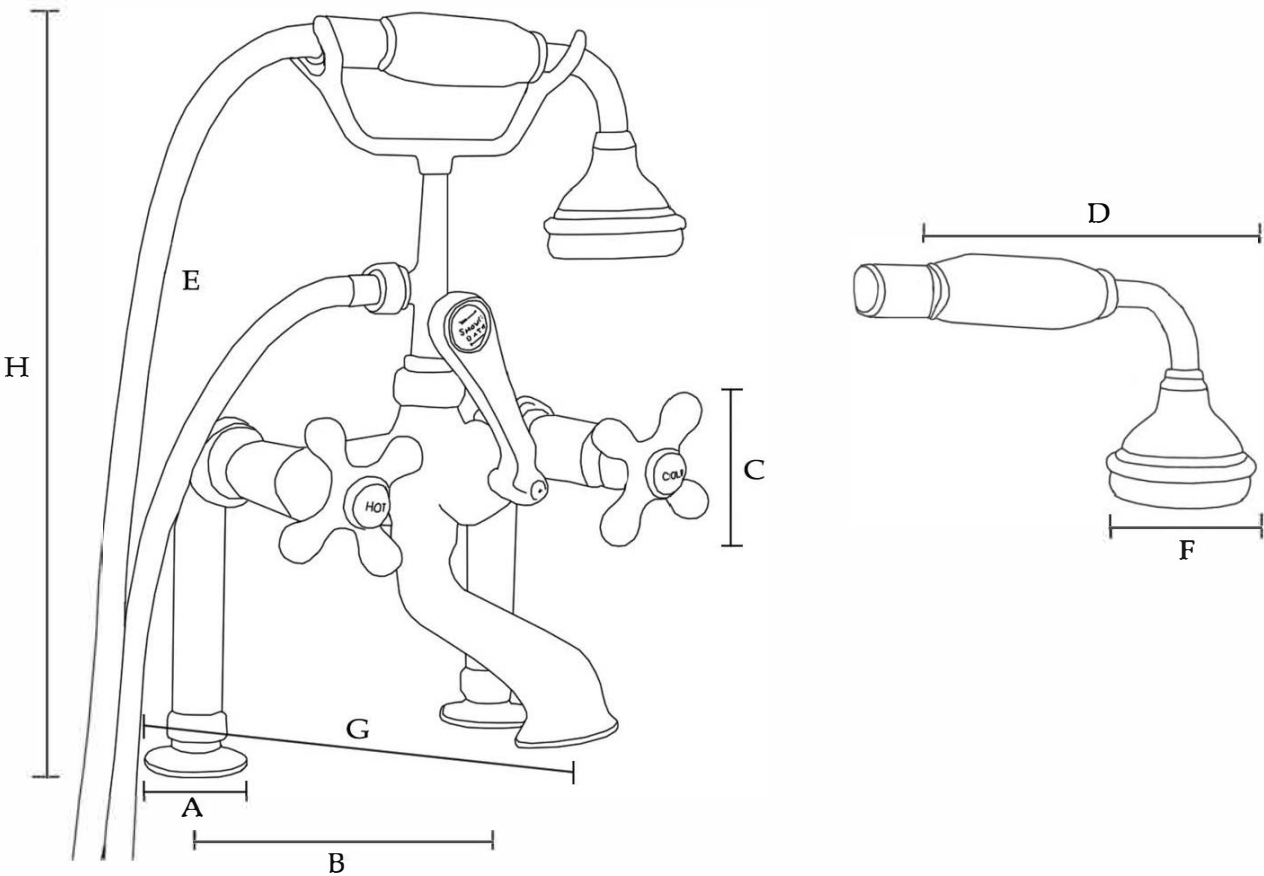

(A) Base: 2" OD	(D) Hand Shower: 7" L	(G) Spout: 7" Reach
(B) Centers: 7" W	(E) Hose: 59-3/4" L	(H) Total Height: 14" H
(C) Handle: 3-1/4" L	(F) Shower Head: 2-1/2" OD	Flow Rate: 7 gal/min


All products and specifications are subject to change without notice. Randolph Morris is not responsible for typographical and/or dimensional errors. Typographical errors are subject to correction.

Note: Rough-in dimensions may vary +/- 1/2" and are subject to change. No responsibility is assumed by Randolph Morris.



Straight Tub Supply Lines by Randolph Morris

Item #: RMH55

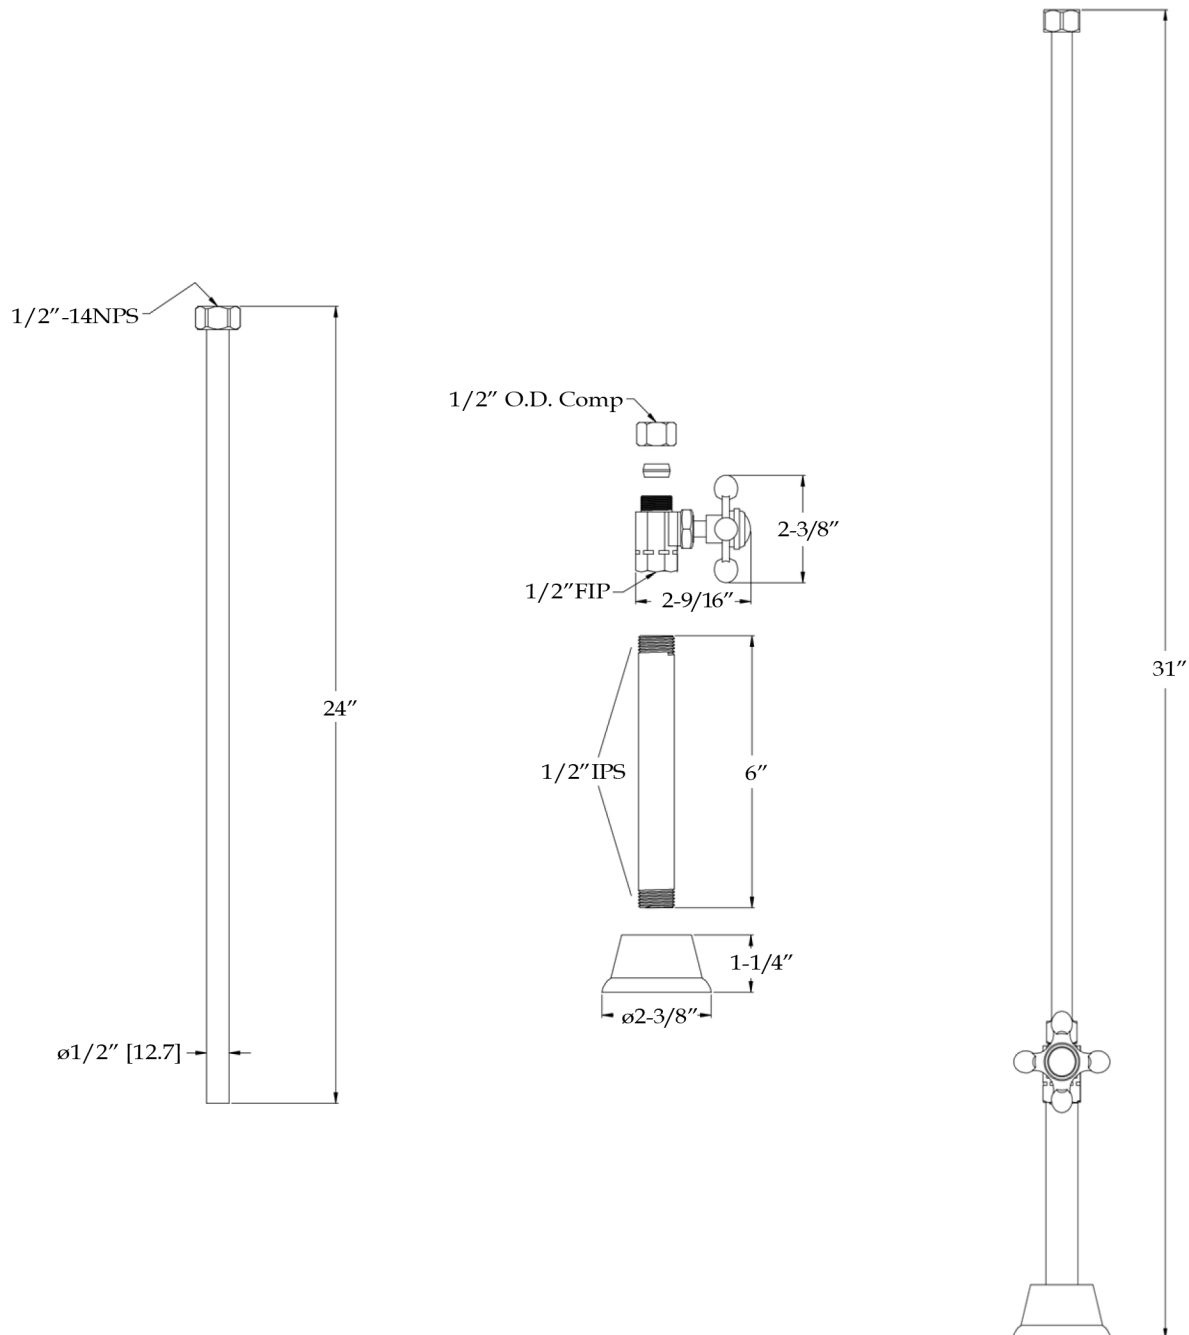


All products and specifications are subject to change without notice. Randolph Morris is not responsible for typographical and/or dimensional errors. Typographical errors are subject to correction.

Note: Rough-in dimensions may vary +/- 1/2" and are subject to change. No responsibility is assumed by Randolph Morris.



Clawfoot Tub Drain *by Randolph Morris*

Item #: RMH6LTD

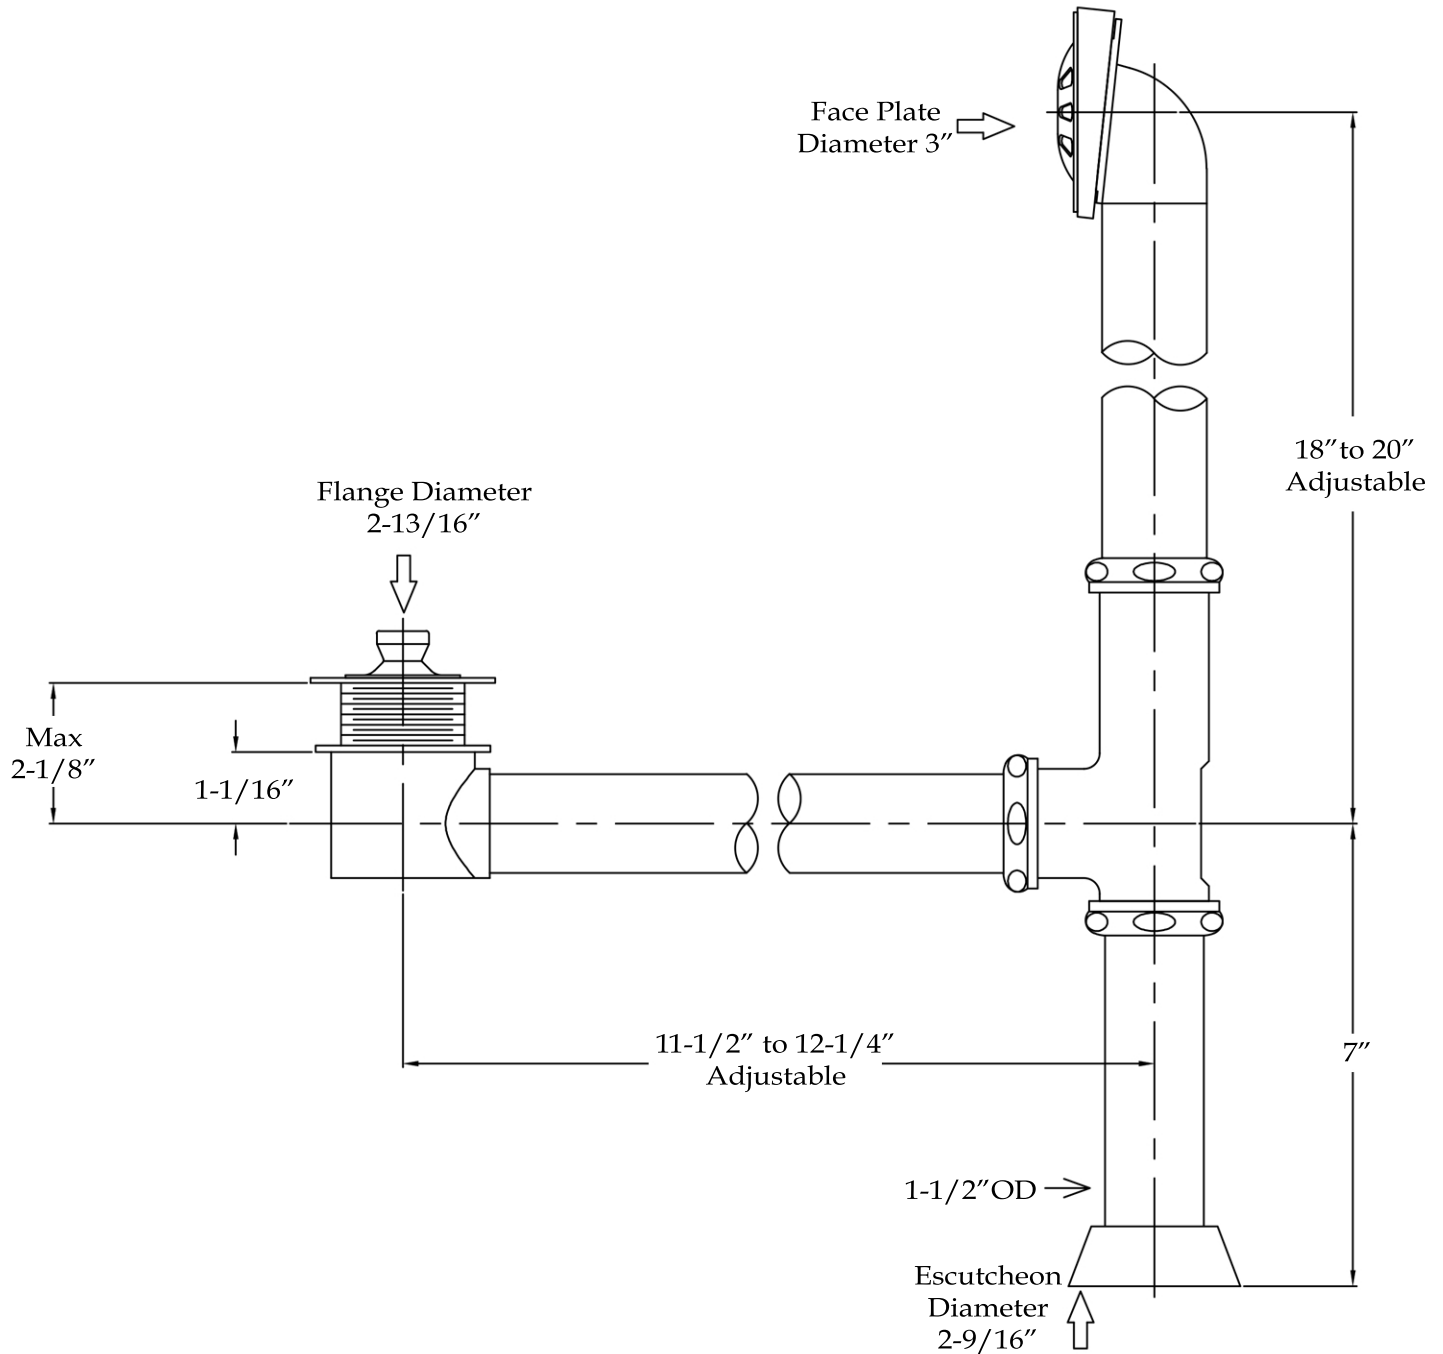




All products and specifications are subject to change without notice. Randolph Morris is not responsible for typographical and/or dimensional errors. Typographical errors are subject to correction.

Note: Rough-in dimensions may vary +/- 1/2" and are subject to change. No responsibility is assumed by Randolph Morris.



Cast Hull Roll Top 7 Rim Dr K-3 by Randolph Morris

Item #: LG57RT7W

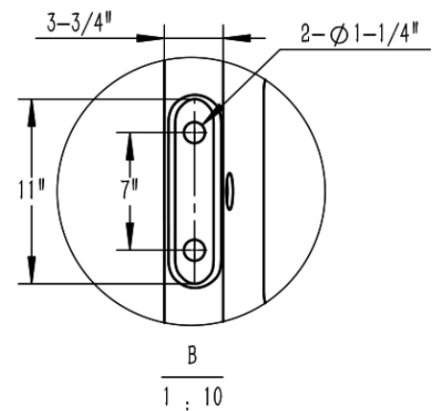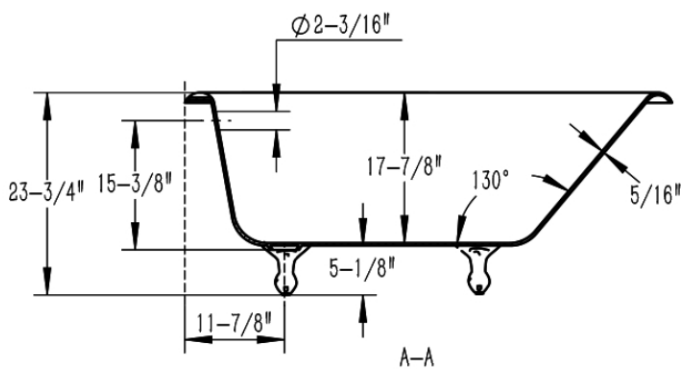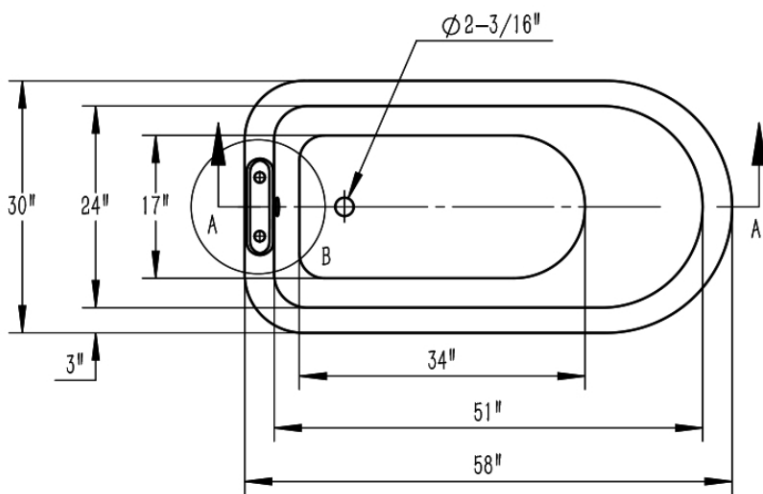

All products and specifications are subject to change without notice. Randolph Morris is not responsible for typographical and/or dimensional errors. Typographical errors are subject to correction.

Note: Rough-in dimensions may vary +/- 1/2" and are subject to change. No responsibility is assumed by Randolph Morris.



Freehold 10PM

07728

What can we help you find today?



Home Depot Credit Cards



BEMIS

Weston Round Soft-Close Never-Loosens Chrome-Hinge Enameled Wood Toilet Seat in Black

★★★★★ (5794) Questions & Answers (167)

\$42⁹⁷

Pay \$17.97 after \$25 OFF your total qualifying purchase upon opening a new card. [Apply for a Home Depot Consumer Card](#)

- Enameled wood with superior high-gloss finish resists chipping
- Stylish metal hinges complement bath hardware and decor
- Whisper close hinge quietly closes seat which eliminates slamming
- [View More Details](#)

Color/Finish: Black with Chrome Hinge



Bowl/Seat Shape: Round



Dimensions

Product Depth (in.)	16.5 in
Product Height (in.)	2.25 in
Product Width (in.)	14.38 in

Details

Bowl/Seat Shape	Round
Color Family	Black
Color/Finish	Black with Chrome Hinge
Features	Soft Close
Included	Hardware
Returnable	90-Day
Seat Material	Molded Wood
Toilet Seat Type	Standard



Memoirs® Stately

Two-piece round-front toilet, 1.28 gpf
K-3933

Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Coordinates with other products in the Memoirs collection with Stately design
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Left-hand trip lever

Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

Recommended Products/Accessories

K-5589 Purefresh® Deodorizing round-front toilet seat
K-76923 PureWash® M250 Quiet-Close™ round-front manual bidet toilet seat
K-5420 Low-Profile Bolt Caps
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose
K-23726 Drain treatment

Included Components

K-4387 Round-front bowl with exposed trapway
K-4434 Toilet tank, 1.28 gpf



ADA

Codes/Standards

ASME A112.19.2/CSA B45.1
EPA WaterSense®
ADA
ICC/ANSI A117.1

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	7	Black Black™


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada

2-7-2026 21:26 - US/CA

THE BOLD LOOK
OF **KOHLER®**

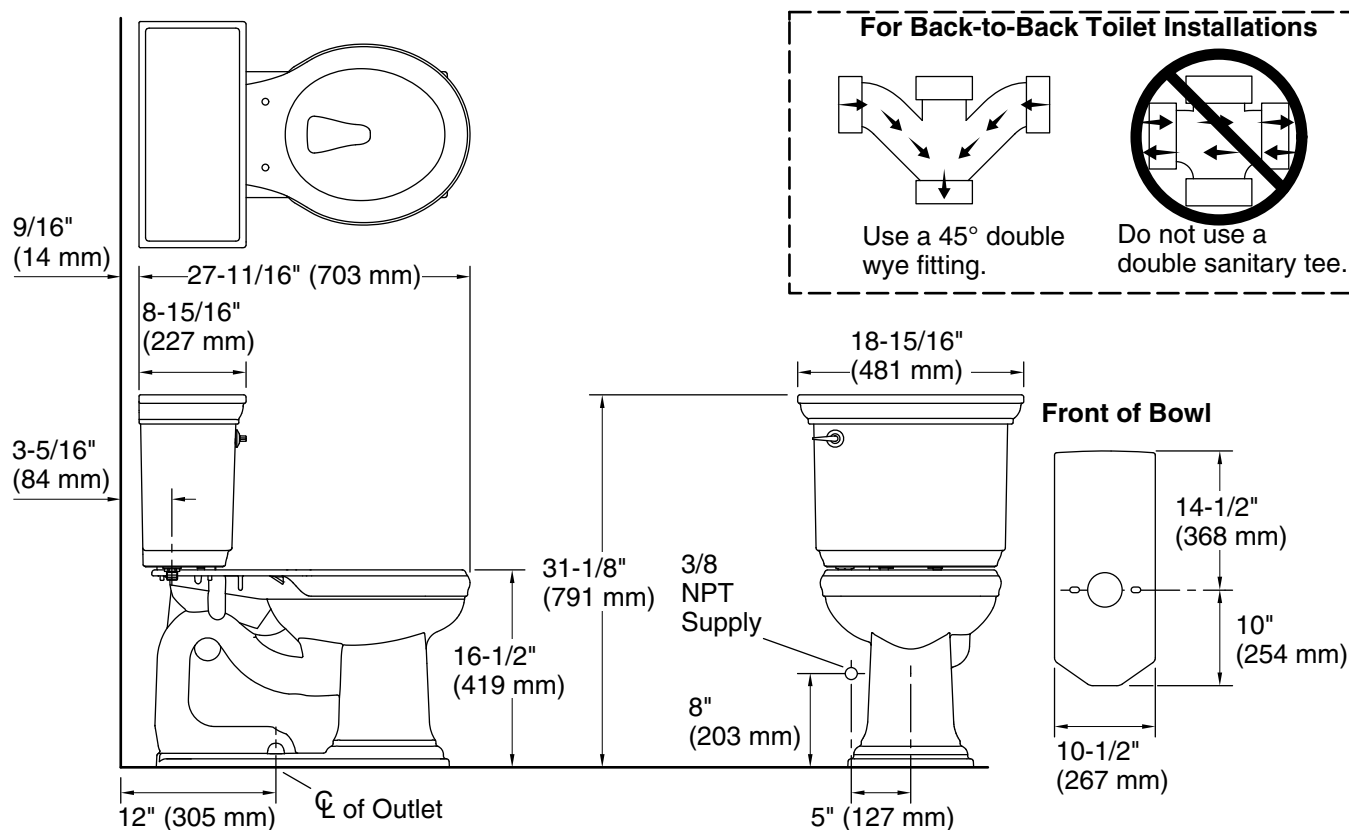

Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Round-front
Flush type:	AquaPiston
Trap passageway:	2-1/8" (54 mm)
Water surface size:	11-1/2" x 8-3/4" (292 mm x 222 mm)
Rim to water surface:	6-1/8" (156 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

Fixture Supply Requirements

Min static pressure:	20 psi (137.9 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	15 psi (103.4 kPa)
Min flow rate:	1 gpm (3.8 lpm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.