

PLS-020A-3PPI

PLS-020A-3PPI

World's smallest magnetic
Level Sensor




Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	180
	VAC	130
Switching current max.	A	0.7
Carry current max.	A	1
Breakdown voltage min.	VDC	200
Total resistance max.	mΩ	280

Environmental Characteristics		
Operating temperature	°C	-20 to +80
Storage temperature	°C	-30 to +80





Mechanical Characteristics		
Density of float typ.*	g / cm ³	0.7
Recommended minimum gravity of medium	g / cm ³	Density of float + 20%

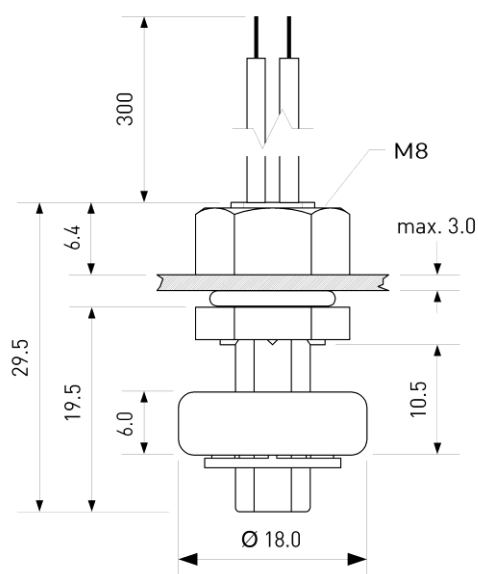* in delivery condition

Dimensions in mm



Features
<ul style="list-style-type: none"> ➤ Polypropylene housing ➤ FDA test passed ➤ typ. Load resistive ➤ Customized types available

Approvals
   

Ordering Information		
Packing Unit	20	pcs
Weight per piece	5.6	g
Weight per package	120	g

PLS-020A-3PPI

PLS-020A-3PPI


World's smallest magnetic
Level Sensor



Material Information

	Material	Colour
Housing	PP	white
Cable	UL 1007, AWG 24, 4 mm stripped and tinned	white
Nuts	PA66, M8, 1 pc preassembled	white
Float	PP foam	white
Potting	PU / Epoxy	black
Sealing ring	Silicone	white

Operation View

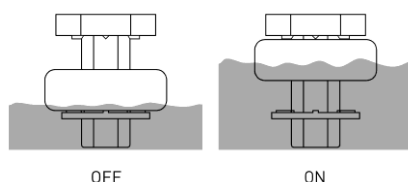


Remarks

When mounted near ferromagnetic parts
switching distance of PLS-020A-3PPI
may vary.

Electromagnetical influences and
magnetic fields may change
the switching behaviour of the
Level Sensor.

Mounting

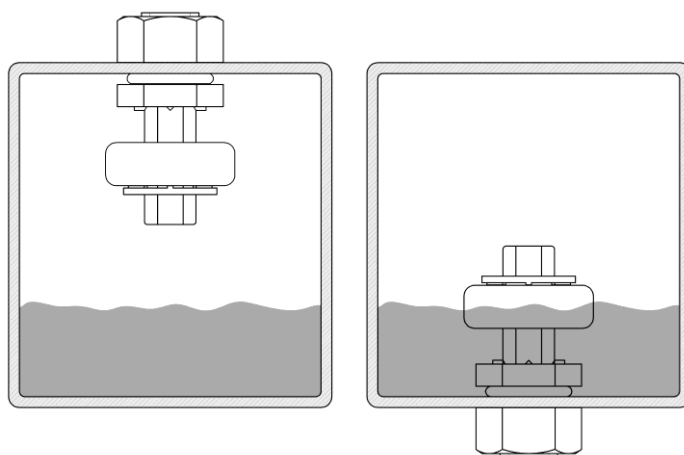

When mounted stem up,
operating functions are reversed.