National Semiconductor

June 1989

54LS257A/DM54LS257B/DM74LS257B, 54LS258A/DM54LS258B/DM74LS258B TRI-STATE® Quad 2-Data Selectors/Multiplexers

General Description

These Schottky-clamped high-performance multiplexers feature TRI-STATE outputs that can interface directly with data lines of bus-organized systems. With all but one of the common outputs disabled (at a high impedance state), the low impedance of the single enabled output will drive the bus line to a high or low logic level. To minimize the possibility that two outputs will attempt to take a common bus to opposite logic levels, the output enable circuitry is designed such that the output disable times are shorter than the output enable times.

This TRI-STATE output feature means that n-bit (paralleled) data selectors with up to 258 sources can be implemented for data buses. It also permits the use of standard TTL registers for data retention throughout the system.

Features

- TRI-STATE versions LS157 and LS158 with same pin-outs
- Schottky-clamped for significant improvement in A-C performance
- Provides bus interface from multiple sources in high-performance systems
- Average propagation delay from data input 12 ns
- Typical power dissipation
  LS257B   50 mW
  LS258B   35 mW
- Alternate military/aerospace devices (54LS257A/54LS258A) are available. Contact a National Semiconductor Sales Office/Distributor for specifications.

Connection Diagrams

Dual-In-Line Package
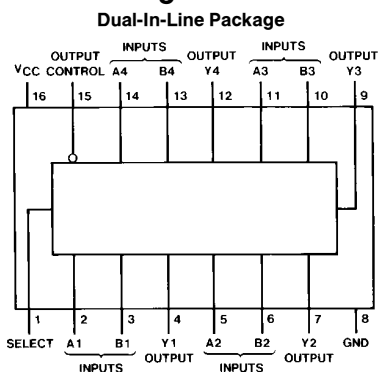
TL/F/6417–1

Order Number 54LS257ADMQB, 54LS257AFMQB, 54LS257ALMQB, DM54LS257BJ, DM54LS257BW, DM74LS257BM or DM74LS257BN
See NS Package Number E20A, J16A, M16A, N16E or W16A

Dual-In-Line Package
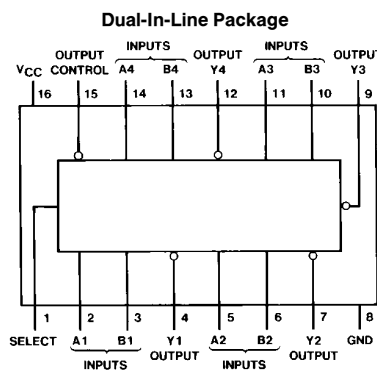
TL/F/6417–2

Order Number 54LS258ADMQB, 54LS258AFMQB, 54LS258ALMQB, DM54LS258BJ, DM54LS258BW, DM74LS258BM or DM74LS258BN
See NS Package Number E20A, J16A, M16A, N16E or W16A

Function Table

Inputs				Output Y	
Output Control	Select	A	B	LS257	LS258
H	X	X	X	Z	Z
L	L	L	X	L	H
L	L	H	X	H	L
L	H	X	L	L	H
L	H	X	H	H	L

H = High Level, L = Low Level, X = Don't Care,
Z = High Impedance (off)

Absolute Maximum Ratings (Note)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	
DM54LS and 54LS	$-55°C$ to $+125°C$
DM74LS	$0°C$ to $+70°C$
Storage Temperature Range	$-65°C$ to $+150°C$

Note: *The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.*

Recommended Operating Conditions

Symbol	Parameter	DM54LS257B			DM74LS257B			Units
		Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High Level Input Voltage	2			2			V
V_{IL}	Low Level Input Voltage			0.7			0.8	V
I_{OH}	High Level Output Current			-1			-2.6	mA
I_{OL}	Low Level Output Current			12			24	mA
T_A	Free Air Operating Temperature	-55		125	0		70	°C

'LS257B Electrical Characteristics
over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ (Note 1)	Max	Units
V_I	Input Clamp Voltage	V_{CC} = Min, I_I = -18 mA				-1.5	V
V_{OH}	High Level Output Voltage	V_{CC} = Min, I_{OH} = Max V_{IL} = Max, V_{IH} = Min	DM54	2.4	3.4		V
			DM74	2.4	3.1		
V_{OL}	Low Level Output Voltage	V_{CC} = Min, I_{OL} = Max V_{IL} = Max, V_{IH} = Min	DM54		0.25	0.4	V
			DM74		0.35	0.5	
		I_{OL} = 12 mA, V_{CC} = Min	DM74		0.25	0.4	
I_I	Input Current @ Max Input Voltage	V_{CC} = Max, V_I = 7V	Select			0.2	mA
			Other			0.1	
I_{IH}	High Level Input Current	V_{CC} = Max, V_I = 2.7V	Select			40	μA
			Other			20	
I_{IL}	Low Level Input Current	V_{CC} = Max, V_I = 0.4V	Select			-0.8	mA
			Other			-0.4	
I_{OZH}	Off-State Output Current with High Level Output Voltage Applied	V_{CC} = Max, V_O = 2.7V V_{IH} = Min, V_{IL} = Max				20	μA
I_{OZL}	Off-State Output Current with Low Level Output Voltage Applied	V_{CC} = Max, V_O = 0.4V V_{IH} = Min, V_{IL} = Max				-20	μA
I_{OS}	Short Circuit Output Current	V_{CC} = Max (Note 2)	DM54	-20		-100	mA
			DM74	-20		-100	
I_{CCH}	Supply Current with Outputs High	V_{CC} = Max (Note 3)			5.9	10	mA
I_{CCL}	Supply Current with Outputs Low	V_{CC} = Max (Note 3)			9.2	16	mA
I_{CCZ}	Supply Current with Outputs Disabled	V_{CC} = Max (Note 3)			12	19	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Note 3: I_{CC} is measured with all outputs open and all possible inputs grounded, while achieving the stated output conditions.

'LS257B Switching Characteristics

at $V_{CC} = 5V$ and $T_A = 25°C$ (See Section 1 for Test Waveforms and Output Load)

Symbol	Parameter	From (Input) To (Output)	$R_L = 667\Omega$				Units
			$C_L = 45$ pF		$C_L = 150$ pF		
			Min	Max	Min	Max	
t_{PLH}	Propagation Delay Time Low to High Level Output	Data to Output		18		27	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Data to Output		18		27	ns
t_{PLH}	Propagation Delay Time Low to High Level Output	Select to Output		28		35	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Select to Output		35		42	ns
t_{PZH}	Output Enable Time to High Level Output	Output Control to Y		15		27	ns
t_{PZL}	Output Enable Time to Low Level Output	Output Control to Y		28		38	ns
t_{PHZ}	Output Disable Time from High Level Output (Note 1)	Output Control to Y		26			ns
t_{PLZ}	Output Disable Time from Low Level Output (Note 1)	Output Control to Y		25			ns

Note 1: $C_L = 5$ pF.

Recommended Operating Conditions

Symbol	Parameter	DM54LS258B			DM74LS258B			Units
		Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High Level Input Voltage	2			2			V
V_{IL}	Low Level Input Voltage			0.7			0.8	V
I_{OH}	High Level Output Current			-1			-2.6	mA
I_{OL}	Low Level Output Current			12			24	mA
T_A	Free Air Operating Temperature	-55		125	0		70	°C

'LS258B Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ (Note 1)	Max	Units
V_I	Input Clamp Voltage	$V_{CC} = $ Min, $I_I = -18$ mA				-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = $ Min, $I_{OH} = $ Max $V_{IL} = $ Max, $V_{IH} = $ Min	DM54	2.4	3.4		V
			DM74	2.4	3.1		
V_{OL}	Low Level Output Voltage	$V_{CC} = $ Min, $I_{OL} = $ Max $V_{IL} = $ Max, $V_{IH} = $ Min	DM54		0.25	0.4	V
			DM74		0.35	0.5	
		$I_{OL} = 12$ mA, $V_{CC} = $ Min	DM74		0.25	0.4	
I_I	Input Current @ Max Input Voltage	$V_{CC} = $ Max, $V_I = 7V$	Select			0.2	mA
			Other			0.1	
I_{IH}	High Level Input Current	$V_{CC} = $ Max, $V_I = 2.7V$	Select			40	μA
			Other			20	

'LS258B Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted) (Continued)

Symbol	Parameter	Conditions		Min	Typ (Note 1)	Max	Units
I_{IL}	Low Level Input Current	V_{CC} = Max, V_I = 0.4V	Select			−0.8	mA
			Other			−0.4	
I_{OZH}	Off-State Output Current with High Level Output Voltage Applied	V_{CC} = Max, V_O = 2.7V V_{IH} = Min, V_{IL} = Max				20	µA
I_{OZL}	Off-State Output Current with Low Level Output Voltage Applied	V_{CC} = Max, V_O = 0.4V V_{IH} = Min, V_{IL} = Max				−20	µA
I_{OS}	Short Circuit Output Current	V_{CC} = Max (Note 2)	DM54	−20		−100	mA
			DM74	−20		−100	
I_{CCH}	Supply Current with Outputs High	V_{CC} = Max (Note 3)			4.1	7	mA
I_{CCL}	Supply Current with Outputs Low	V_{CC} = Max (Note 3)			9	14	mA
I_{CCZ}	Supply Current with Outputs Disabled	V_{CC} = Max (Note 3)			12	19	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Note 3: I_{CC} is measured with all outputs open and all possible inputs grounded, while achieving the stated output conditions.
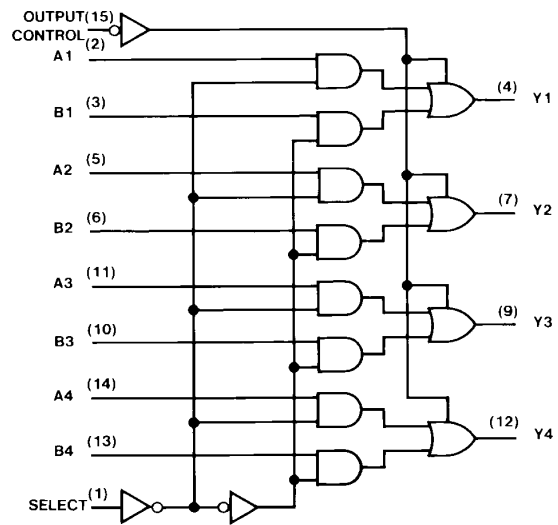
'LS258B Switching Characteristics

at V_{CC} = 5V and T_A = 25°C (See Section 1 for Test Waveforms and Output Load)

Symbol	Parameter	From (Input) To (Output)	R_L = 667Ω				Units
			C_L = 45 pF		C_L = 150 pF		
			Min	Max	Min	Max	
t_{PLH}	Propagation Delay Time Low to High Level Output	Data to Output		18		27	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Data to Output		18		27	ns
t_{PLH}	Propagation Delay Time Low to High Level Output	Select to Output		28		35	ns
t_{PHL}	Propagation Delay Time High to Low Level Output	Select to Output		35		42	ns
t_{PZH}	Output Enable Time to High Level Output	Output Control to Y		15		27	ns
t_{PZL}	Output Enable Time to Low Level Output	Output Control to Y		28		38	ns
t_{PHZ}	Output Disable Time from High Level Output (Note 4)	Output Control to Y		26			ns
t_{PLZ}	Output Disable Time from Low Level Output (Note 4)	Output Control to Y		25			ns

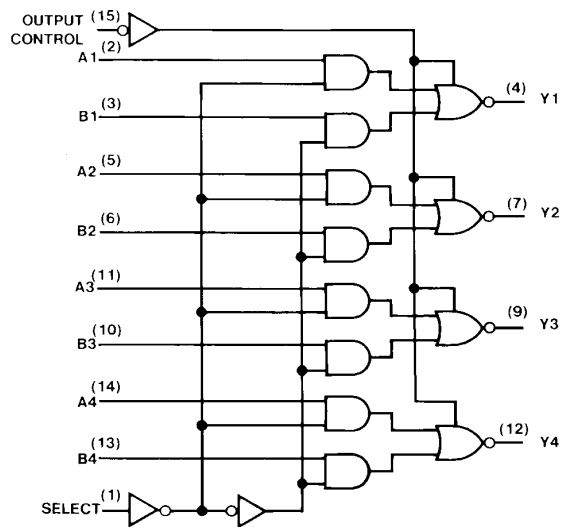**Note 4:** C_L = 5 pF.

4

Logic Diagrams

LS257B

TL/F/6417–3

LS258B

TL/F/6417–4

5

Physical Dimensions inches (millimeters)

0.350 ± 0.008
(8.890 ± 0.203)

Top View

0.063 − 0.075
(1.600 − 1.905)

DETAIL A

Side View

0.200 ± 0.005
(5.080 ± 0.127)
TYP

45° × 0.015 ± 0.010
(0.381 ± 0.254)

0.015
(0.381)
MIN TYP

0.077 − 0.093
(1.959 − 2.362)

PIN #1
INDEX

0.007 − 0.011
(0.178 − 0.279)
R TYP

0.022 − 0.028
(0.559 − 0.711)
TYP

0.045 − 0.055
(1.143 − 1.397)
TYP

0.067 − 0.083
(1.702 − 2.108)
TYP

0.045 − 0.055
(1.143 − 1.397)
TYP

45° × 0.040 ± 0.010
(1.016 ± 0.254)
3 PLCS

Bottom View

0.003
(0.076)
MIN TYP

0.015
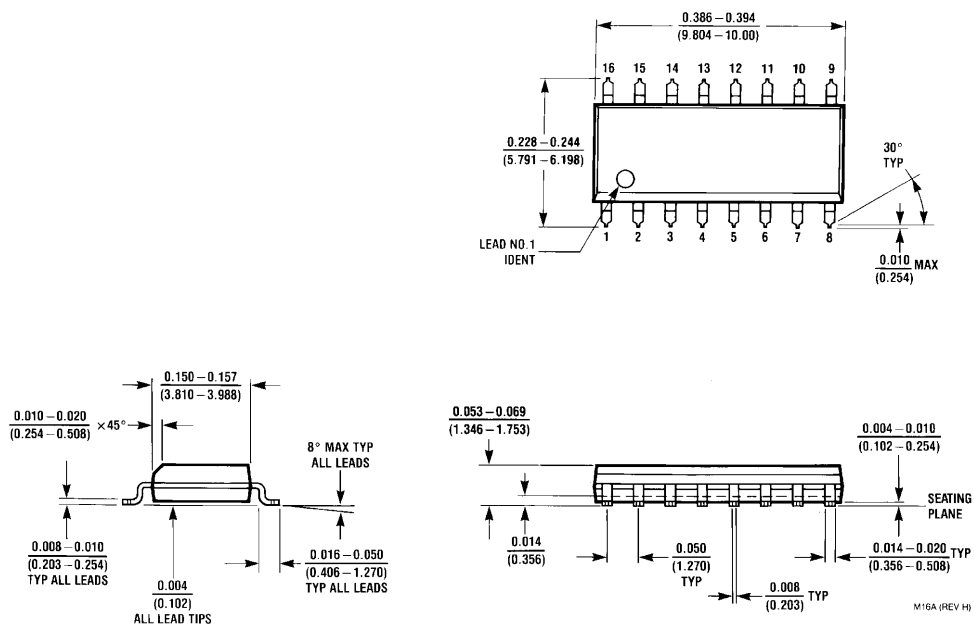(0.381)
MAX TYP

0.022
(0.559)
MAX TYP

0.006
(0.152)
MIN TYP

Detail A
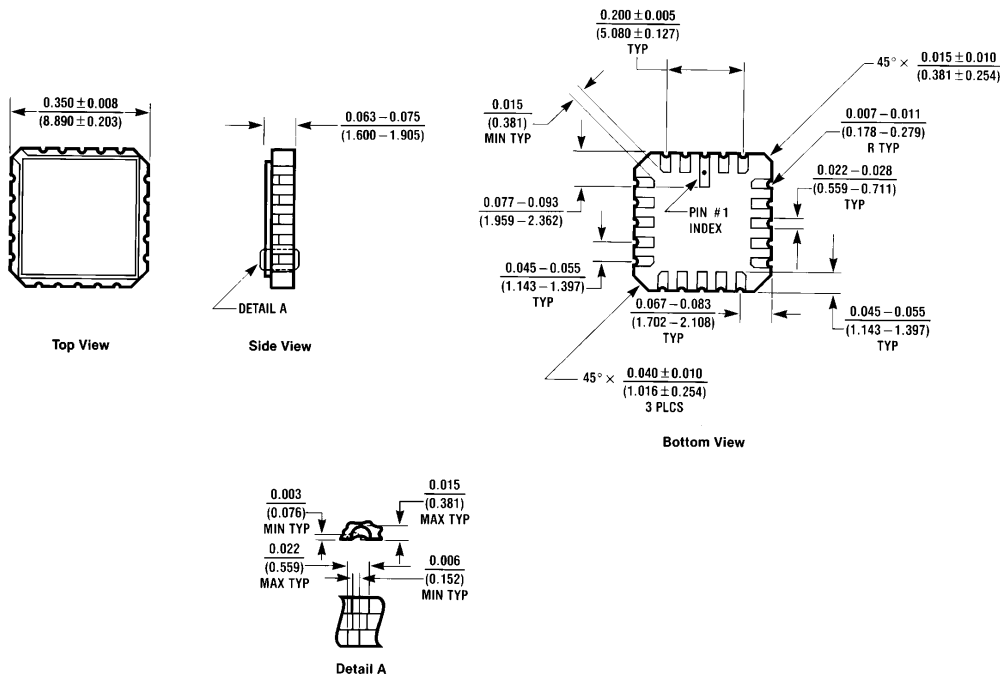
E20A (REV D)

Ceramic Leadless Chip Carrier Package (E)
Order Number 54LS257ALMQB or 54LS258ALMQB
NS Package Number E20A

0.785
[19.94] MAX

16   9

0.220 − 0.310
[5.59 − 7.87]

R 0.025
[0.64]

1   8

R 0.005 − 0.020
[0.13 − 0.51] TYP

0.037 ± 0.005
[0.94 ± 0.13] TYP

0.005
[0.13]
MIN TYP

0.055 ± 0.005
[1.40 ± 0.13] TYP

0.200
[5.08]
MAX TYP

0.020 − 0.060
[0.51 − 1.52] TYP

0.290 − 0.320
[7.37 − 8.13]

GLASS SEALANT

0.180
[4.57] MAX

0.010 ± 0.002
[0.25 ± 0.05] TYP

0.150
[3.81] MIN TYP

0.125 − 0.200
[3.18 − 5.08] TYP

0.080
[2.03] MAX
BOTH ENDS

90° ± 4°
TYP

95° ± 5°
TYP

0.310 − 0.410
[7.87 − 10.41]

0.100 ± 0.010
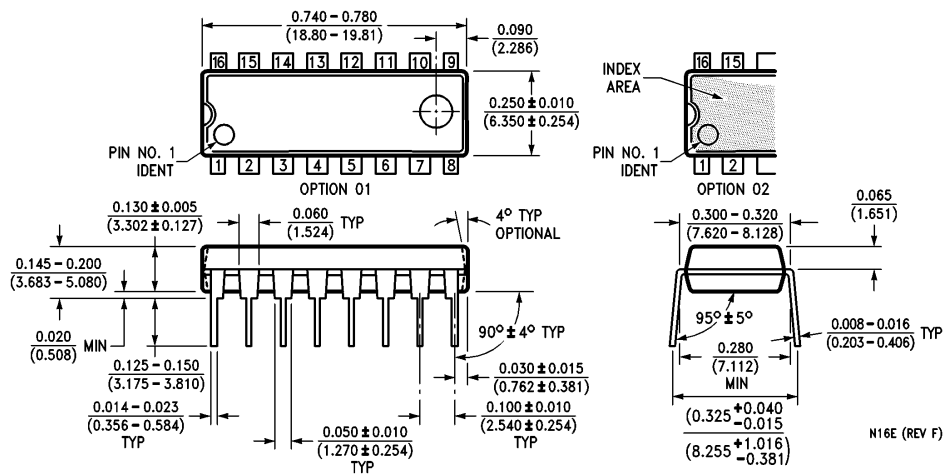[2.54 ± 0.25] TYP

0.018 ± 0.003
[0.46 ± 0.08] TYP
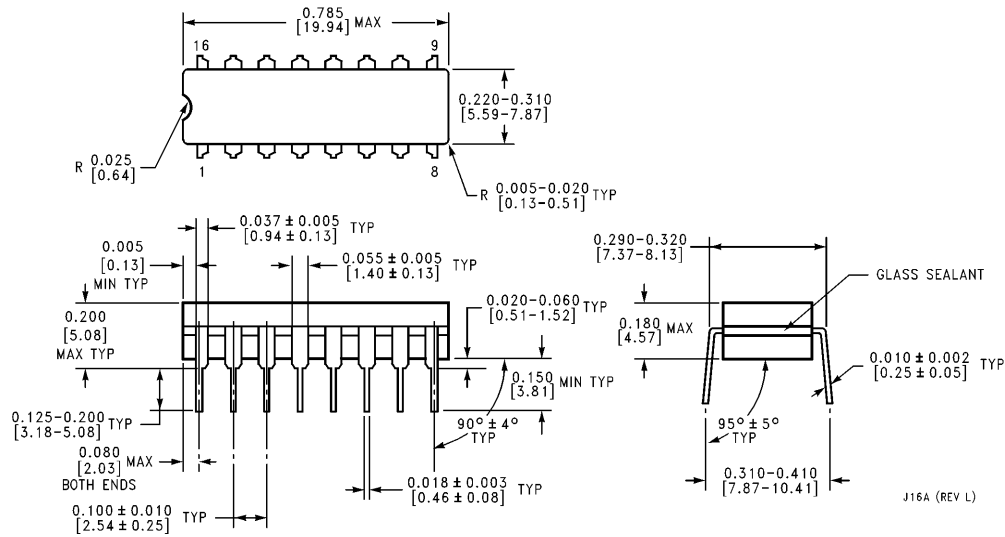
J16A (REV L)

16-Lead Ceramic Dual-In-Line Package (J)
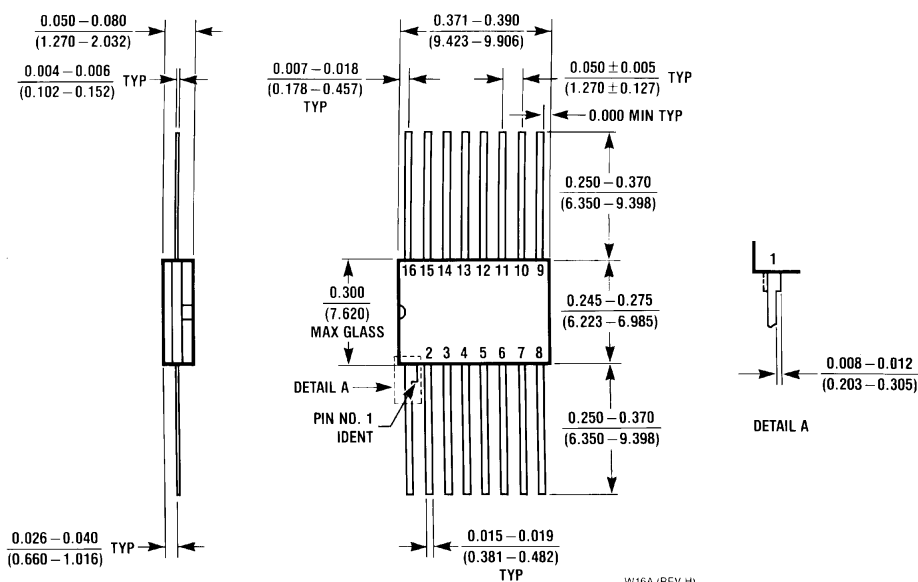**Order Number 54LS257ADMQB, 54LS258ADMQB, DM54LS257BJ or DM54LS258BJ**
NS Package Number J16A

6

Physical Dimensions inches (millimeters) (Continued)

0.386 − 0.394
(9.804 − 10.00)

0.228 − 0.244
(5.791 − 6.198)

30°
TYP

LEAD NO.1
IDENT

0.010 MAX
(0.254)

0.150 − 0.157
(3.810 − 3.988)

0.010 − 0.020
(0.254 − 0.508) ×45°

8° MAX TYP
ALL LEADS

0.008 − 0.010
(0.203 − 0.254)
TYP ALL LEADS

0.004
(0.102)
ALL LEAD TIPS

0.016 − 0.050
(0.406 − 1.270)
TYP ALL LEADS

0.053 − 0.069
(1.346 − 1.753)

0.004 − 0.010
(0.102 − 0.254)

SEATING
PLANE

0.014
(0.356)

0.050
(1.270)
TYP

0.014 − 0.020 TYP
(0.356 − 0.508)

0.008 TYP
(0.203)

M16A (REV H)

16-Lead Small Outline Molded Package (M)
Order Number DM74LS257BM or DM74LS258BM
NS Package Number M16A

0.740 − 0.780
(18.80 − 19.81)

0.090
(2.286)

INDEX
AREA

0.250 ± 0.010
(6.350 ± 0.254)

PIN NO. 1
IDENT

OPTION 01

PIN NO. 1
IDENT

OPTION 02

0.065
(1.651)

0.130 ± 0.005
(3.302 ± 0.127)

0.060 TYP
(1.524)

4° TYP
OPTIONAL

0.300 − 0.320
(7.620 − 8.128)

0.145 − 0.200
(3.683 − 5.080)

90° ± 4° TYP

95° ± 5°

0.008 − 0.016 TYP
(0.203 − 0.406)

0.020 MIN
(0.508)

0.125 − 0.150
(3.175 − 3.810)

0.030 ± 0.015
(0.762 ± 0.381)

0.280
(7.112)
MIN

0.014 − 0.023
(0.356 − 0.584)
TYP

0.050 ± 0.010
(1.270 ± 0.254)
TYP

0.100 ± 0.010
(2.540 ± 0.254)
TYP

$(0.325 {+0.040 \atop -0.015})$

$(8.255 {+1.016 \atop -0.381})$

N16E (REV F)

16-Lead Molded Dual-In-Line Package (N)
Order Number DM74LS257BN or DM74LS258BN
NS Package Number N16E

7

Physical Dimensions inches (millimeters) (Continued)

$$\frac{0.050 - 0.080}{(1.270 - 2.032)}$$

$$\frac{0.004 - 0.006}{(0.102 - 0.152)} \text{ TYP}$$

$$\frac{0.371 - 0.390}{(9.423 - 9.906)}$$

$$\frac{0.007 - 0.018}{(0.178 - 0.457)} \text{ TYP}$$

$$\frac{0.050 \pm 0.005}{(1.270 \pm 0.127)} \text{ TYP}$$

0.000 MIN TYP

$$\frac{0.250 - 0.370}{(6.350 - 9.398)}$$

16 15 14 13 12 11 10 9

$$\frac{0.300}{(7.620)} \text{ MAX GLASS}$$

$$\frac{0.245 - 0.275}{(6.223 - 6.985)}$$

2 3 4 5 6 7 8

DETAIL A

PIN NO. 1 IDENT

$$\frac{0.250 - 0.370}{(6.350 - 9.398)}$$

$$\frac{0.026 - 0.040}{(0.660 - 1.016)} \text{ TYP}$$

$$\frac{0.015 - 0.019}{(0.381 - 0.482)} \text{ TYP}$$

$$\frac{0.008 - 0.012}{(0.203 - 0.305)}$$

DETAIL A

W16A (REV H)

16-Lead Ceramic Flat Package (W)
Order Number 54LS257AFMQB or 54LS258AFMQB
NS Package Number W16A

National Semiconductor was acquired by Texas Instruments.

This file is the datasheet for the following electronic components:

DM74LS258 - http://www.ti.com/product/dm74ls258?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS258AFMQB - http://www.ti.com/product/54ls258afmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258BM - http://www.ti.com/product/dm74ls258bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257 - http://www.ti.com/product/dm74ls257?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257BM - http://www.ti.com/product/dm74ls257bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258 - http://www.ti.com/product/dm74ls258?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS258ALMQB - http://www.ti.com/product/54ls258almqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257BN - http://www.ti.com/product/dm74ls257bn?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257BN - http://www.ti.com/product/dm74ls257bn?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258 - http://www.ti.com/product/dm74ls258?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258BM - http://www.ti.com/product/dm74ls258bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258BN - http://www.ti.com/product/dm74ls258bn?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS258AFMQB - http://www.ti.com/product/54ls258afmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257ADMQB - http://www.ti.com/product/54ls257admqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258BN - http://www.ti.com/product/dm74ls258bn?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257A - http://www.ti.com/product/54ls257a?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257ADMQB - http://www.ti.com/product/54ls257admqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257AFMQB - http://www.ti.com/product/54ls257afmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258BM - http://www.ti.com/product/dm74ls258bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257A - http://www.ti.com/product/54ls257a?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257ALMQB - http://www.ti.com/product/54ls257almqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS258BN - http://www.ti.com/product/dm74ls258bn?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257BN - http://www.ti.com/product/dm74ls257bn?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257 - http://www.ti.com/product/dm74ls257?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257AFMQB - http://www.ti.com/product/54ls257afmqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257BM - http://www.ti.com/product/dm74ls257bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS258ADMQB - http://www.ti.com/product/54ls258admqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257 - http://www.ti.com/product/dm74ls257?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS257ALMQB - http://www.ti.com/product/54ls257almqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

DM74LS257BM - http://www.ti.com/product/dm74ls257bm?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS258ADMQB - http://www.ti.com/product/54ls258admqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe

54LS258ALMQB - http://www.ti.com/product/54ls258almqb?HQS=TI-null-null-dscatalog-df-pf-null-wwe