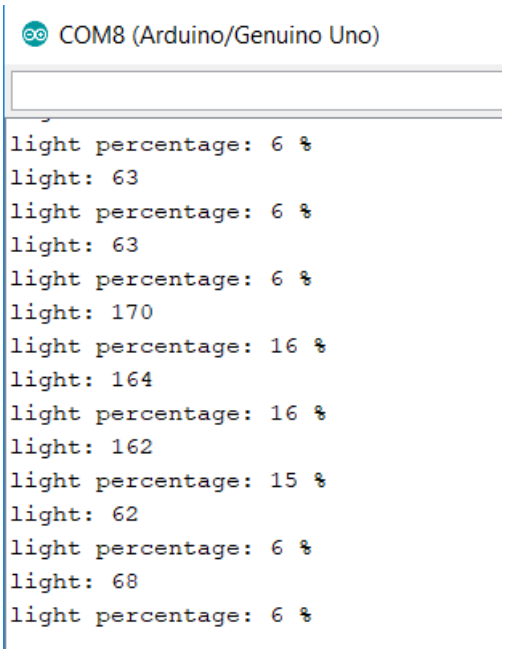
COM8 (Arduino/Genuino Uno)
light percentage: 6 %
light: 63
light percentage: 6 %
light: 63
light percentage: 6 %
light: 170
light percentage: 16 %
light: 164
light percentage: 16 %
light: 162
light percentage: 15 %
light: 62
light percentage: 6 %
light: 68
light percentage: 6 %

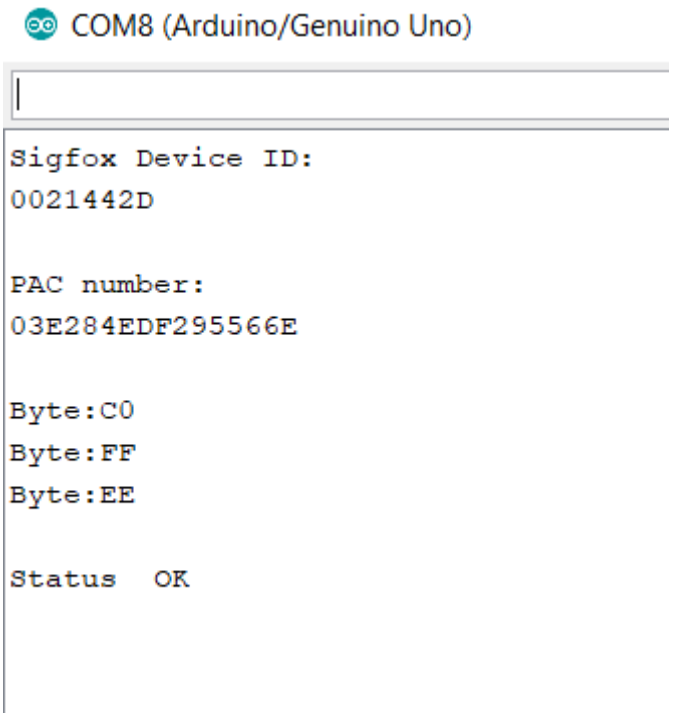
COM8 (Arduino/Genuino Uno)
Sigfox Device ID:
0021442D
PAC number:
03E284EDF295566E
Byte:C0
Byte:FF
Byte:EE
Status OK

-110.07
40.96
BKRWS01-21442D
21442D
2018-02-12 14:24:19
BKRWS01-21442D

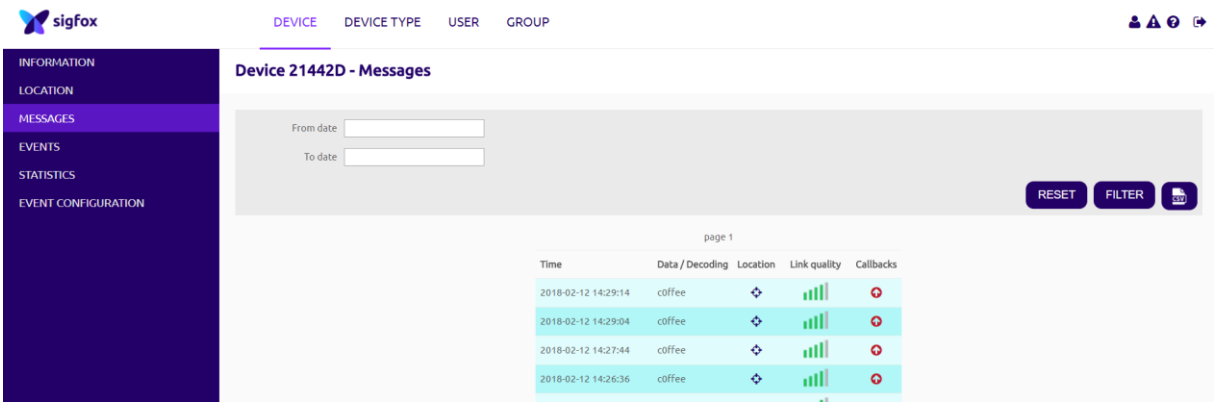
sigfox
DEVICE
DEVICE TYPE
USER
GROUP
INFORMATION
LOCATION
MESSAGES
EVENTS
STATISTICS
EVENT CONFIGURATION
Device 21442D - Messages
From date
To date
RESET
FILTER
page 1
Time
Data / Decoding
Location
Link quality
Callbacks
2018-02-12 14:29:14 c0ffee
2018-02-12 14:29:04 c0ffee
2018-02-12 14:27:44 c0ffee
2018-02-12 14:26:36 c0ffee

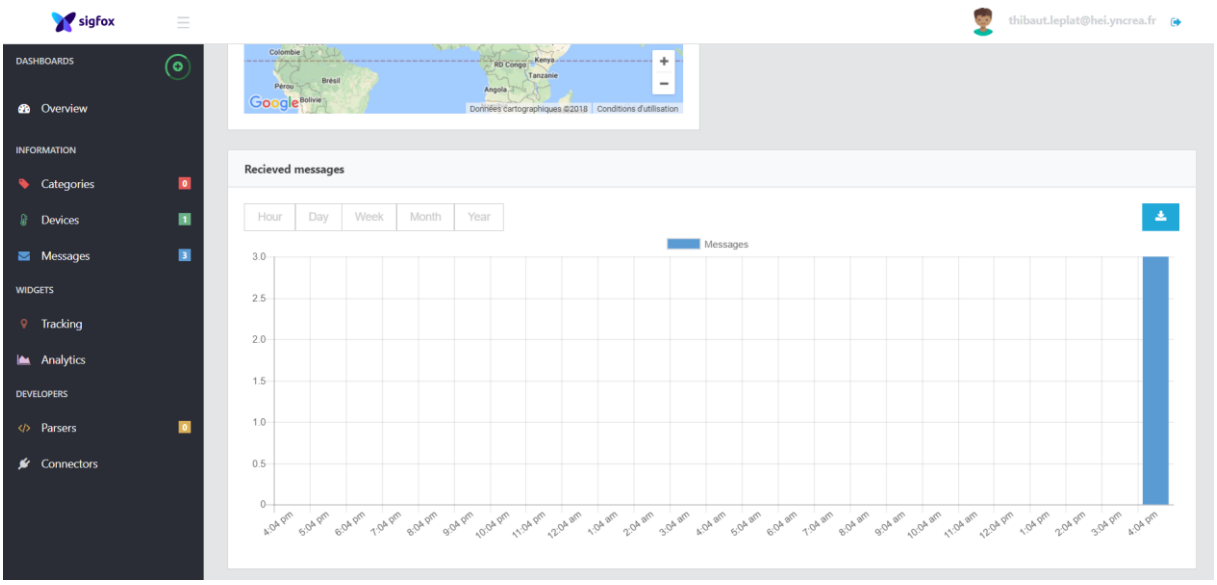
sigfox
thibaut.leplat@hei.yncrea.fr
DASHBOARDS
Overview
INFORMATION
Categories
Devices
Messages
WIDGETS
Tracking
Analytics
DEVELOPERS
Parsers
Connectors
Recieved messages
Hour
Day
Week
Month
Year
Messages

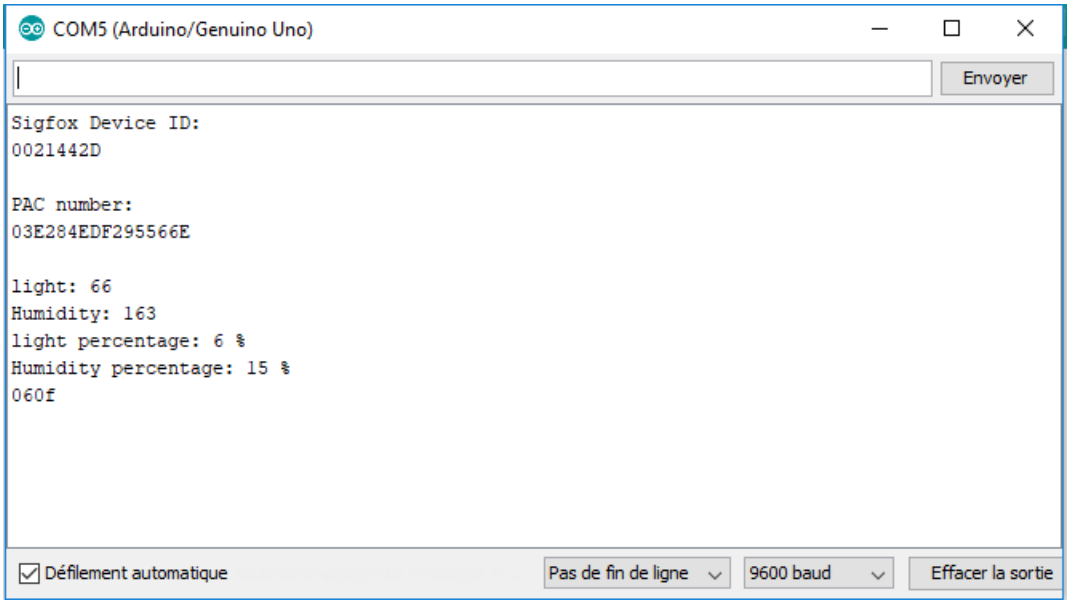
COM5 (Arduino/Genuino Uno)
Envoyer
Sigfox Device ID:
0021442D
PAC number:
03E284EDF295566E
light: 66
Humidity: 163
light percentage: 6 %
Humidity percentage: 15 %
060f
Défilement automatique
Pas de fin de ligne
9600 baud
Effacer la sortie
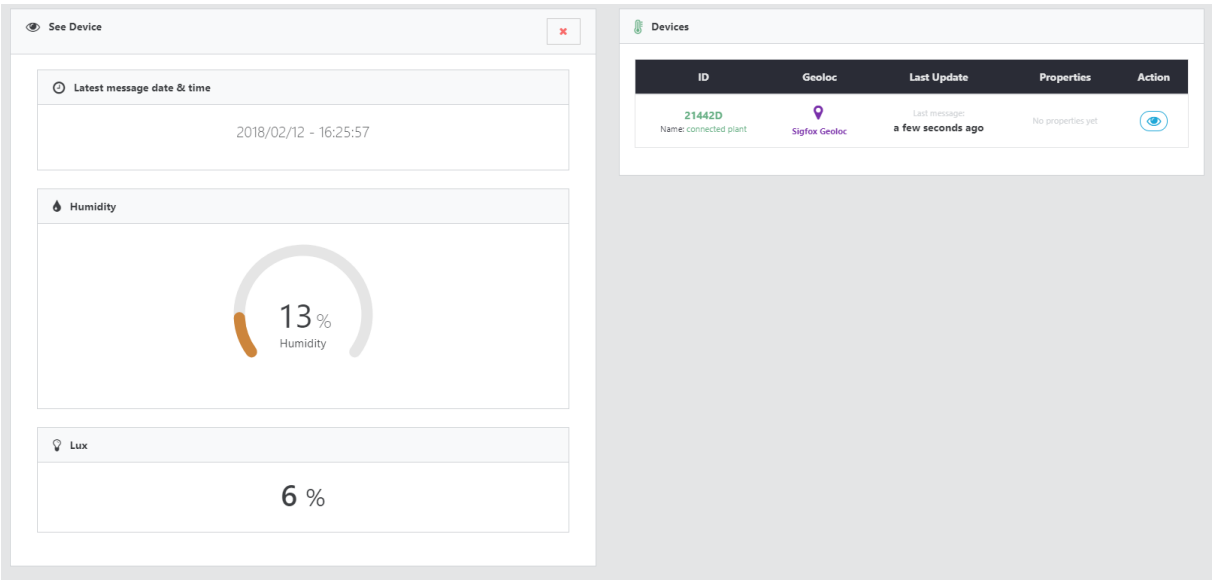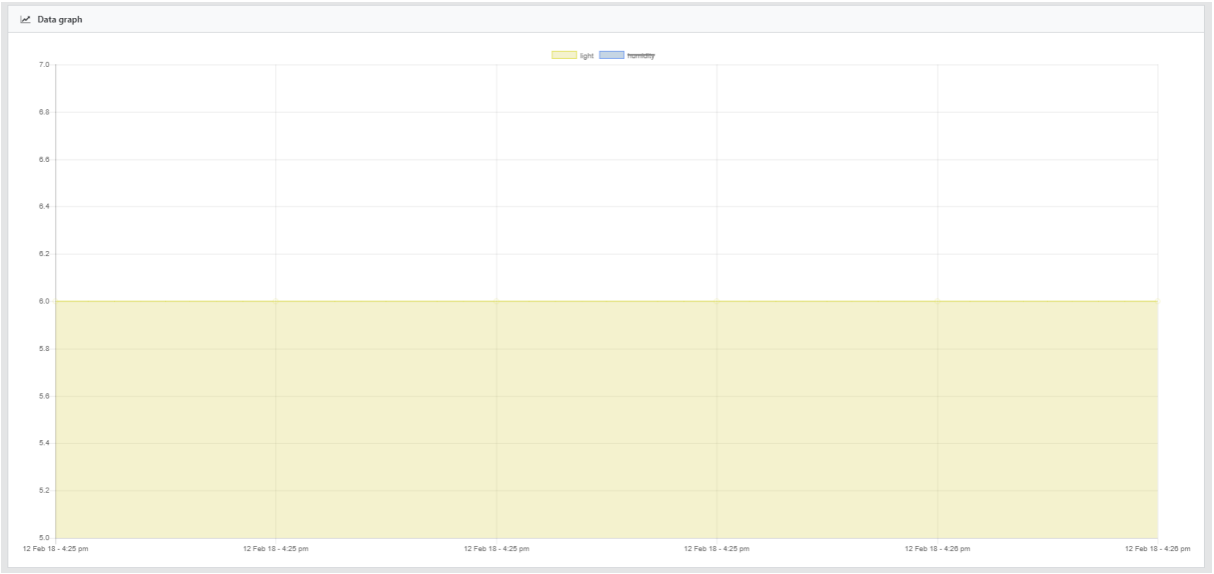
Date	Data	Device	Geoloc	Seq Number	Reception	Action
2018/02/12 16:25:20	060d light: **6 %** humidity: **13 %**	21442D connected plant		117	-114 0B77 37.45	
2018/02/12 16:25:02	060d light: **6 %** humidity: **13 %**	21442D connected plant	Sigfox Network Lat: 50.633 Lng: 3.022	116	-133 36F9 18.42 -143 1EBD 8.52 -108 0B77 43.37 -136 3D24 14.92 -136 1E9E 15.32 -126 3D21 25.3