



For more information

PCD Cutter for Aluminum Machining


TUNG^{PEED}**SMILL**


Tungaloy Report No. 524-G

Expansion of lightweight cutter for #30 machining centers



TPYD06J100B31.7R22  8953355
N_{max}=15000min⁻¹

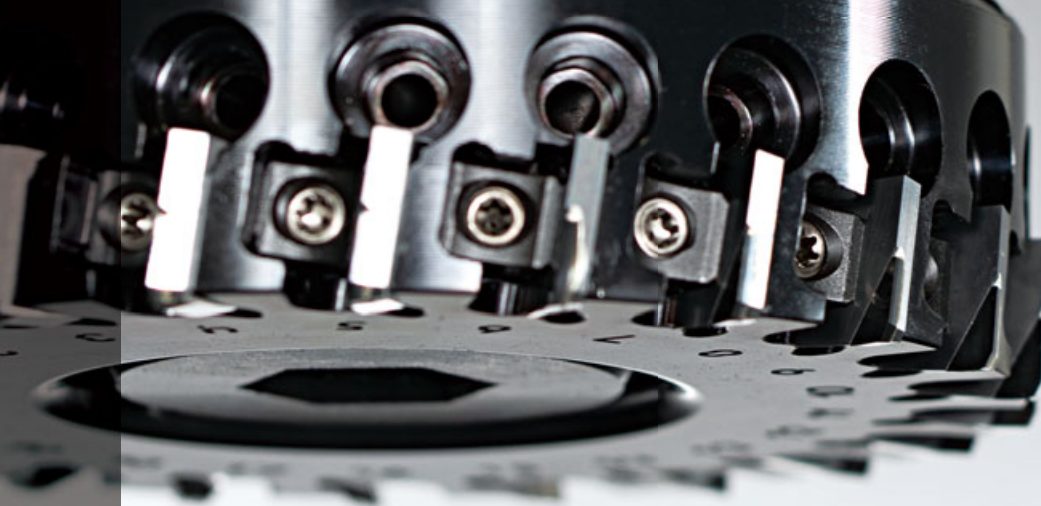

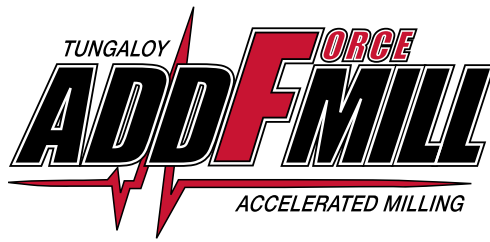

TUNG ^{PEED}SMILL



Super high density cutters
for efficient finishing of aluminum



Super high density cutter for efficient finishing of aluminum

■ Unique axial adjusting mechanism of PCD cutting edges

- Saving a great amount of presetting work.



TPYD06...

Unique axial adjusting mechanism - Cam Adjust

A single key wrench is all it takes from mounting the inserts to fine-adjusting for precision, Setting range: 1 mm



Internal coolant in each pocket

Coolant is directed to the cutting edge, facilitating smooth chip evacuation

Steel body (Exterior color: Black)

the cutter body is made of durable steel

Extremely high balancing quality for high speed milling

G6.3 under ISO1940/1


New

■ Lightweight-body for #30 spindle machine, Now available.

- Cutter bodies with DC = 100 & 125 mm, applicable in #30 spindle machines
- Available of extra close pitch cutter for high productivity



TPYD06...
(Lightweight type)

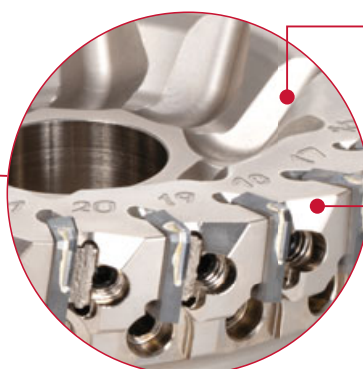

Multiple grooves effectively reduce weight

Steel body (Exterior color: Silver)

the cutter body is made of durable steel

Extremely high balancing quality for high speed milling

G6.3 under ISO1940/1

New

■ The number of insert settings that can be used for a wide range of machining forms

TPYD06..., EPYD06...

DC (mm)	Number of inserts on the cutter		
	Coarse pitch	Close pitch	Extra close pitch
40	-	-	8
50	6	8	10
63	8	10	14
80	-	10	16
100	-	12	22
125	-	14	26
160	-	20	34



New TPYD06...
(Extra close pitch type)

New TPYD06...(Lightweight type)

DC (mm)	Cutter weight (kg, Insert-included)	Number of inserts on the cutter	
		Close pitch	Extra close pitch
100	< 1.3*	12	22
125	< 1.8*	14	26

*Including the arbor weight, it must be 3 kg or less.



New TPYD06...
(Lightweight type)


■ Safety measures for high speed milling

Safety insert lock to protect against centrifugal force

Inserts are securely retained in place, preventing displacement due to centrifugal force during high-speed milling.

Wedge shape design prevents the insert from dislodging from its seat due to centrifugal inertia force.

Note: Do not exceed the maximum rotation (n max) inscribed on the cutter body.




DC (mm)	Max. rotation number (min ⁻¹)
40	24,000
50	20,000
63	19,000
80	17,000
100	15,000
125	14,000
160	12,000

■ Insert variations


■ Standard insert with built-in deburrer (YDEN0603PDFR-D, YDEN0603PDSR-D)

- Double-angled cutting edge for effective chip splitting
- Burr formation is significantly minimized by the cutting edge's chip thinning effect at the exit
- Built-in wiper geometry for better surface finishing

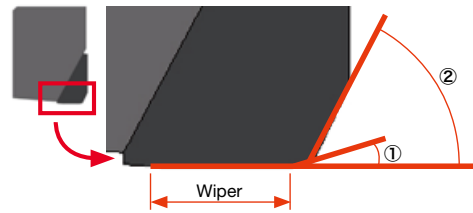

■ Standard insert with edge preparation (YDEN0603PDSR-D)

For cutting gates or greater depths of cut

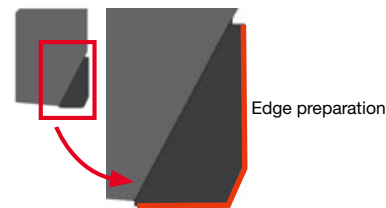


■ Deburring insert - Tungaloy's exclusive insert design (YDEN0603PDFR-BD)

Use with standard inserts for enhanced burr-free machining




■ Wiper insert - for superior surface finishing (YDEN0603PDFR-WD)

Use with standard inserts to improve the surface finishing quality. Number of wiper inserts on the cutter may depend on the feed rate.

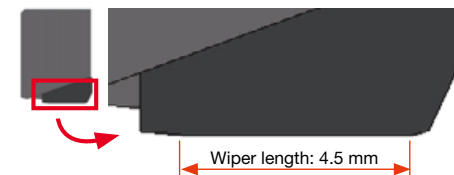


■ Nose radius (with R0.4 or R0.8)


Ideal for applications where corner radius on the workpiece is specified. Rounded nose corner can also protect the edge from fracture during challenging interrupted cutting.

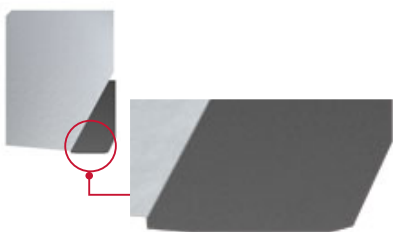

Double-angle design (YDEN0603PDFR-D)

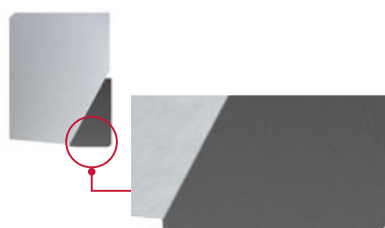


R0.4 (YDEN060304PDFR-D)

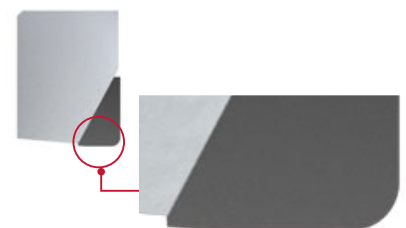


R0.8 (YDEN060308PDFR-D)

■ Long edged insert

Featuring 9.5 mm in length, the cutting edge can effectively remove gates and risers left on the workpiece without damaging the carbide insert base. The peripheral cutting edge is chamfered to protect against fractures and reduce burr formation.

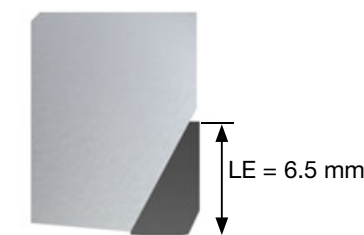


Standard geometry
(YDEN0603PDFR-D)

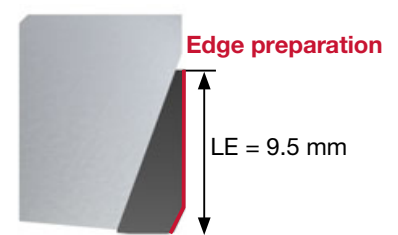

Long edge version
(YDEN0603PDCR-LD)

CUTTING PERFORMANCE


Reduced burr formation

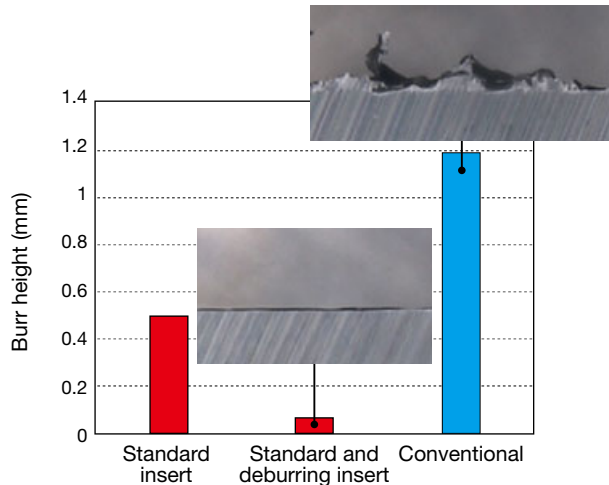


Cutter : TPYD06J080B25.4R16 (DC = 80 mm, CICT = 16)
 Insert : YDEN0603PDFR-D DX110 (Standard insert)
 : YDEN0603PDFR-BD DX110 (Deburring insert)
 Workpiece : A1100 (30x100 mm)
 Cutting speed : $V_c = 2,513$ m/min
 Number of revolutions : $n = 10,000$ min⁻¹
 Feed per tooth : $f_z = 0.1$ mm/t
 Feed speed : $V_f = 16,000$ m/min (Standard insert)
 : $V_f = 8,000$ m/min (Standard and deburring insert)
 Insert runout : < 1 μ m
 Depth of cut : $a_p = 0.5$ mm
 Depth of width : $a_e = 30$ mm
 Coolant : Wet
 Machining : Face milling (on center)
 Machine : Vertical M/C, BT40

2 types of deburring inserts for burr-free milling

Better surface roughness

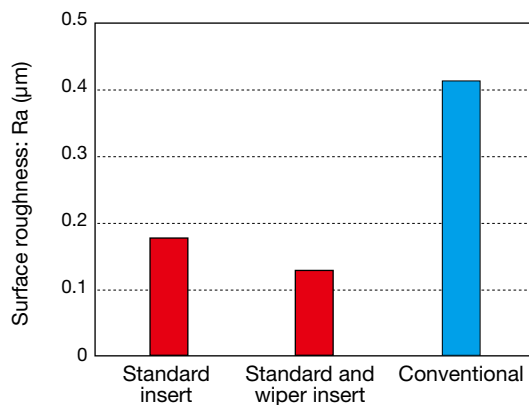


Cutter : TPYD06J080B25.4R16 (DC = 80 mm, CICT = 16)
 Insert : YDEN0603PDFR-D DX110 (Standard insert)
 : YDEN0603PDFR-WD DX110 (Wiper insert)
 Workpiece : A1100 (30x100 mm)
 Cutting speed : $V_c = 2,513$ m/min
 Number of revolutions : $n = 10,000$ min⁻¹
 Feed per tooth : $f_z = 0.1$ mm/t
 Feed speed : $V_f = 16,000$ m/min
 Insert runout : < 1 μ m
 Depth of cut : $a_p = 0.5$ mm
 Depth of width : $a_e = 30$ mm
 Coolant : Wet
 Machining : Face milling (on center)
 Machine : Vertical M/C, BT40

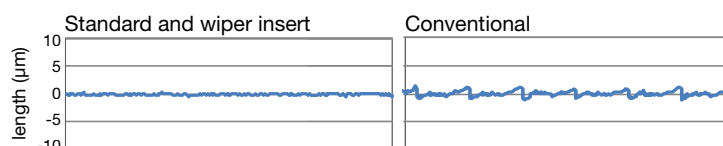

Wiper inserts improve surface roughness

Strong cutting edge

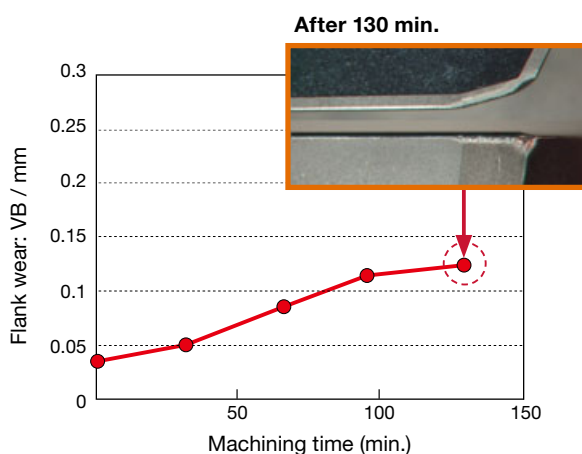

Cutter : TPYD06J100B31.7R22 (DC = 100 mm, CICT = 1)
 Insert : YDEN0603PDSR-D DX110 (with edge preparation)
 Workpiece : AC4C-T6 (150 x 200 mm with 70 holes)
 Cutting speed : $V_c = 3,141$ m/min
 Number of revolutions : $n = 10,000$ min⁻¹
 Feed per tooth : $f_z = 0.09$ mm/t
 Insert runout : < 1 μ m
 Depth of cut : $a_p = 0.2$ mm
 Depth of width : $a_e = 75$ mm
 Coolant : Wet
 Machining : Face milling (down cut)
 Machine : Vertical M/C, BT40

Optimized edge preparation ensures machining security during heavy interrupted cutting

TPYD06

Face milling cutter for non-ferrous applications, bore type, with PCD inserts


GAMP = +9°, GAMF = +4°

New



ø40 - ø63 mm

ø63 - ø160 mm

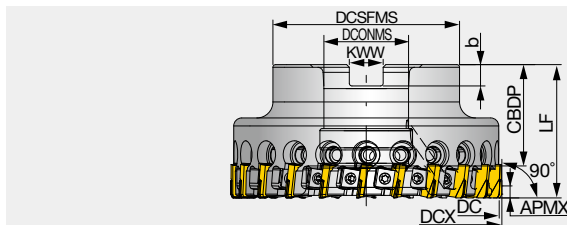

	Designation	APMX	DC	DCX	CICT	DCSFMS	LF	DCONMS	CBDP	KWW	b	WT(kg)	Air hole	RPMX(min ⁻¹)	Insert
New	TPYD06M040B16.0R08	4.5	40	42	8	38	40	16	18	8.4	5.6	0.28	With	24000	YDEN0603...
New	TPYD06M050B22.0R10	4.5	50	52	10	47	40	22	20	10.4	6.3	0.42	With	21000	YDEN0603...
	TPYD06M063B22.0R08	4.5	63	65	8	45	40	22	20	10.4	6.3	0.59	With	19,000	YDEN0603...
	TPYD06M063B22.0R10	4.5	63	65	10	45	40	22	20	10.4	6.3	0.57	With	19,000	YDEN0603...
New	TPYD06M063B22.0R14	4.5	63	65	14	47	40	22	20	10.4	6.3	0.42	With	19000	YDEN0603...
	TPYD06M080B27.0R10	4.5	80	82	10	60	50	27	22	12.4	7	1.3	With	17,000	YDEN0603...
	TPYD06M080B27.0R16	4.5	80	82	16	60	50	27	22	12.4	7	1.24	With	17,000	YDEN0603...
	TPYD06J080B25.4R10	4.5	80	82	10	60	50	25.4	26	9.5	6	1.31	With	17,000	YDEN0603...
	TPYD06J080B25.4R16	4.5	80	82	16	60	50	25.4	26	9.5	6	1.26	With	17,000	YDEN0603...
	TPYD06M100B32.0R12	4.5	100	102	12	70	50	32	25	14.4	8	1.85	With	15,000	YDEN0603...
	TPYD06M100B32.0R22	4.5	100	102	22	70	50	32	25	14.4	8	1.78	With	15,000	YDEN0603...
	TPYD06J100B31.7R12	4.5	100	102	12	70	50	31.75	32	12.7	8	1.84	With	15,000	YDEN0603...
	TPYD06J100B31.7R22	4.5	100	102	22	70	50	31.75	32	12.7	8	1.76	With	15,000	YDEN0603...
	TPYD06M125B40.0R14	4.5	125	127	14	90	60	40	32	16.4	9	3.59	With	14,000	YDEN0603...
	TPYD06M125B40.0R26	4.5	125	127	26	90	60	40	32	16.4	9	3.48	With	14,000	YDEN0603...
	TPYD06J125B38.1R14	4.5	125	127	14	90	60	38.1	38	15.9	10	3.61	With	14,000	YDEN0603...
	TPYD06J125B38.1R26	4.5	125	127	26	90	60	38.1	38	15.9	10	3.56	With	14,000	YDEN0603...
	TPYD06M160B40.0R20	4.5	160	162	20	90	60	40	32	16.4	9	5.34	With	12,000	YDEN0603...
	TPYD06M160B40.0R34	4.5	160	162	34	90	60	40	32	16.4	9	5.2	With	12,000	YDEN0603...
	TPYD06J160B38.1R20	4.5	160	162	20	90	60	38.1	38	15.9	10	5.43	With	12,000	YDEN0603...
	TPYD06J160B38.1R34	4.5	160	162	34	90	60	38.1	38	15.9	10	5.29	With	12,000	YDEN0603...

New Wrench, Grip, and Shell locking bolt are not included in the box.

SPARE PARTS FOR **New** CUTTER



Designation	Insert locking wedge	Wedge fixing screw	Adjusting wedge screw (Optional)	Grip (Optional)	Shell locking bolt (Optional)	Wedge tightening wrench (Optional)
TPYD06M040B16.0R08	WF385N	SSHM5-4PF-S	(AJC08-BLDS635)	(TBJ)	(SRPS118-0416)	(P-2.5F)
TPYD06M050B22.0R10	WF385N	SSHM5-4PF-S	(AJC08-BLDS635)	(TBJ)	(FSHM10-40H)	(P-2.5F)
TPYD06M063B22.0R14	WF385N	SSHM5-4PF-S	(AJC08-BLDS635)	(TBJ)	(CM10X30H)	(P-2.5F)

SPARE PARTS FOR CONVENTIONAL CUTTER




Designation	Insert locking wedge	Wedge fixing screw	Adjusting cam	Torx bit	Cam tightening screw	Wrench	Grip	Shell locking bolt
TPYD06M063B22.0R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	CM10x30H
TPYD06*080B2*.R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	CM12x30H
TPYD06M100B32.0R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	CM16x40H
TPYD06J100B31.7R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	TMBA-M16H
TPYD06*125B*.R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	TMBA-M20H
TPYD06*160B*.R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	TMBA-M20H

New

TPYD06

Face milling cutter for non-ferrous applications, bore type, with PCD inserts

GAMP = +9°, GAMF = +4°

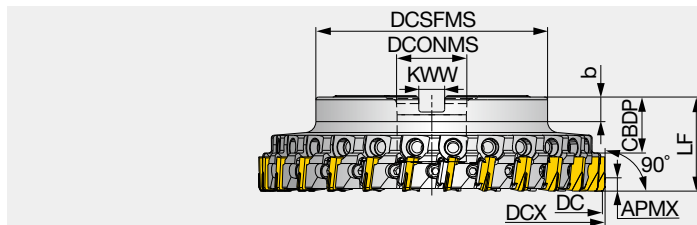

Designation	APMX	DC	DCX	CICT	DCSFMS	LF	DCONMS	CBDR	KWW	b	WT(kg)	Air hole	RPMX(min ⁻¹)	Insert
TPYD06J100B25.4R12	4.5	100	102	12	70	35	25.4	24.5	9.5	6	1.29	With	15000	YDEN0603...
TPYD06M100B27.0R12	4.5	100	102	12	76	35	27	24.5	12.4	7	1.27	With	15000	YDEN0603...
TPYD06J100B25.4R22	4.5	100	102	22	70	35	25.4	24.5	9.5	6	1.29	With	15000	YDEN0603...
TPYD06M100B27.0R22	4.5	100	102	22	76	35	27	24.5	12.4	7	1.27	With	15000	YDEN0603...
TPYD06J125B25.4R14	4.5	125	127	14	70	35	25.4	24.5	9.5	6	1.71	With	13000	YDEN0603...
TPYD06M125B27.0R14	4.5	125	127	14	76	35	27	24.5	12.4	7	1.69	With	13000	YDEN0603...
TPYD06J125B25.4R26	4.5	125	127	26	70	35	25.4	24.5	9.5	6	1.71	With	13000	YDEN0603...
TPYD06M125B27.0R26	4.5	125	127	26	76	35	27	24.5	12.4	7	1.68	With	13000	YDEN0603...

Wrench, Grip, and Shell locking bolt are not included in the box.


SPARE PARTS

Designation	Insert locking wedge	Wedge fixing screw	Adjusting wedge screw (Optional)	Grip (Optional)	Shell locking bolt (Optional)	Wedge tightening wrench (Optional)
TPYD06M100B**R...	WF385N	SSHM5-4PF-S	(AJC08-BLDS635)	(TBJ)	(HM12-26OH)	(P-2.5F)
TPYD06M125B**R...	WF385N	SSHM5-4PF-S	(AJC08-BLDS635)	(TBJ)	(HM12-26OH)	(P-2.5F)

EPYD06

Face milling cutter for non-ferrous applications, shank type, with PCD inserts

GAMP = +9°, GAMF = +4°

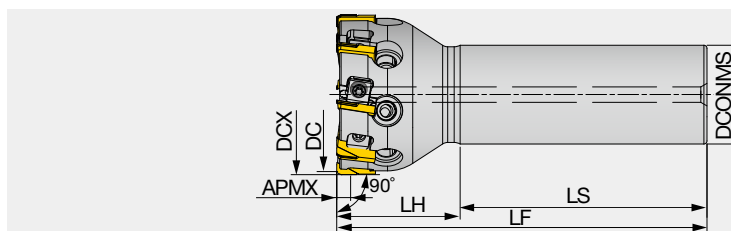

Designation	APMX	DC	DCX	CICT	DCONMS	LF	LH	LS	WT(kg)	Air hole	RPMX(min ⁻¹)	Insert
EPYD06M050C32.0R06	4.5	50	52	6	32	120	40	80	0.91	With	20,000	YDEN0603...
EPYD06M050C32.0R08	4.5	50	52	8	32	120	40	80	0.9	With	20,000	YDEN0603...


SPARE PARTS

Designation	Insert locking wedge	Wedge fixing screw	Adjusting cam	Torx bit	Cam tightening screw	Wrench	Grip
EPYD06M050C32.0R**	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W

■ Proper cutting edge setting

- For the best surface finishing results, wiper insert's (-WD) cutting edge should be set 0.06 mm higher than that of the standard insert's (-D). For deburring inserts (-BD), set 0.2 mm higher than that of the standard insert (-D).
- Effective cutter diameter will vary in accordance with wiper insert (-WD) or deburring insert (-BD) dimensions. Refer to the table below for an effective cutter diameter in each specific case.

DC (mm)	Effective cutter diameter (mm)		
	Standard (-D) only	Standard (-D) and wipers (-WD)	Standard (-D) and deburrers (-BD)
40	50	39.4	33.4
50	50	49.4	43.4
63	63	62.4	56.4
80	80	79.4	73.4
100	100	99.4	93.4
125	125	124.4	118.4
160	160	159.4	153.4

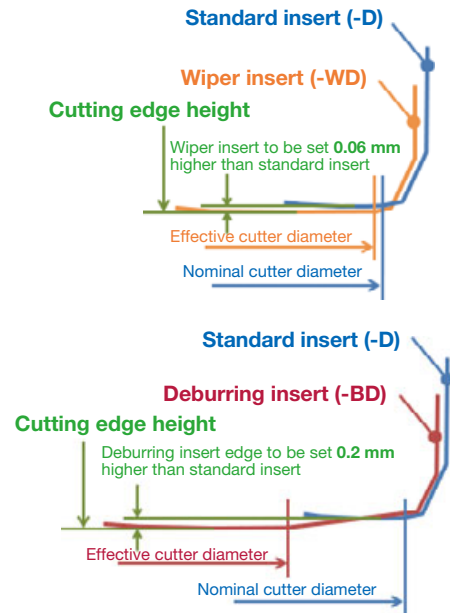

■ Mounting of deburring inserts

To make the best of the cutter's deburring ability, make sure to place a deburring insert immediately behind every standard insert on the cutter.

Please note that, since a deburring insert has no cutting edge on the periphery, the effective cutting edges of the cutter will be divided by 2.

Example:

For $\phi 100$ mm cutter with $Z = 22$, number of effective cutting edges would be $Z = 11$. (standard inserts x 11 and deburring inserts x 11)

The order of insert installation is as follows:

Standard → Deburring → Standard → Deburring...


Location of deburring inserts on the cutter



- **Standard insert**
(YDEN0603PDF/SR-D)
- **Deburring insert**
(YDEN0603PDFR-BD)

■ Managing re-ground inserts

- To maintain minimum insert capability, re-grinding beyond 0.8 mm from the original cutting edge profile is not recommended.
- Regrinding will change the dimension of the wiper edge and may affect the surface finishing quality.
- Used PCD inserts are reground as a batch from the same cutter in order to maintain the dimensional uniformity of all inserts in the same batch.
- If inserts from different batches are accidentally mixed, cutter balance may be compromised, risking tool or machine fracture.
- Re-check the cutter diameter, as needed, after re-grinding inserts are mounted to ensure proper tool offset.

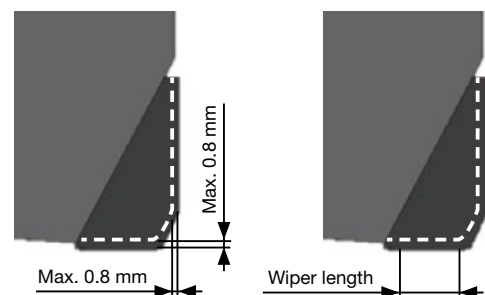

INSERT SETTING PROCEDURE FOR UNIQUE AXIAL ADJUSTING MECHANISM CUTTER (DC 63 - 160 mm / Exterior color: Black)

1 Loosening the wedge



Loosen the wedge so that they do not exceed the cutter's outer diameter.


2 Cleaning insert pockets



Remove all the inserts from the pockets. Use compressed air to thoroughly clean the pockets of dust and chips.


3 Mounting the inserts, LIGHTLY tighten the wedge

Place the insert in the pocket and LIGHTLY tighten the wedge at 1 N·m (0.74 ft-lb). Make sure that there are no gaps between the insert and cutter body. Fix all inserts on the cutter in the same manner.




5 Initially adjusting the axial height

Place the adjusting cam in the hole located at the bottom of the pocket. Adjust the insert axial height by rotating the cam in the CW direction to gradually increase the axial measure. Stop when it reaches 30 μ m ~ 40 μ m just below the desired position. Then, slightly rotate the cam in the CCW direction before removing the cam from the cutter body.




6 Tighten the wedges

Firmly tighten the wedges to 3.5 N·m (2.58 ft-lb). In order to prevent body deformation from tightening, it is recommended to perform the final tightening alternately. Do not exceed the recommended clamping torque when fixing the insert. This may damage or fracture the screw.



4 Place the Adjusting cam

The recessed part of the cam should be placed on the insert bottom.

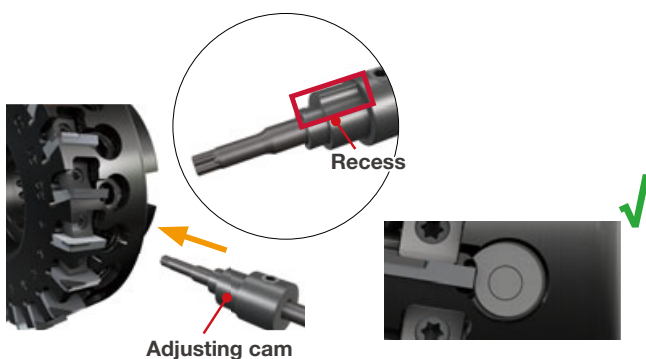

7 Final adjustments

For the final axial adjustment, instead of setting the insert height close to the target position, set so that it reaches approximately 8 μ m above the target. Slightly rotate the cam CCW to remove the key off the body. The insert will go down by 8 μ m to the target height when the cam is removed. It is recommended that the inserts be set to less than 5 μ m axially in relation to one another.

New

INSERT SETTING PROCEDURE (DC 40 - 63mm, 100 - 120 mm / Exterior color: Silver)

Preparing the key wrenches

■ The key for axial adjustment of insert



■ The key for tightening the wedge screws



Note: The key wrenches are not included with the cutter. Please purchase them separately.

1 Loosening the wedge



Loosen the wedge so that they do not exceed the cutter's outer diameter.

2 Cleaning insert pockets




Remove all the inserts from the pockets. Use compressed air to thoroughly clean the pockets of dust and chips.

3 Mounting the inserts, LIGHTLY tighten the wedge

Place the insert in the pocket and LIGHTLY tighten the wedge to 1 N·m (0.74 ft-lb). Make sure that there are no gaps between the insert and cutter body. Fix all inserts on the cutter in the same manner.



Direction to place the insert




4 Place the Adjusting cam

The recessed part of the cam should be placed on the insert bottom.




5 Initially adjusting the axial height

Place the adjusting cam in the hole located at the bottom of the pocket. Adjust the insert axial height by rotating the cam in the CW direction to gradually increase the axial measure. Stop when it reaches 20 μ m just below the desired position. Then, slightly rotate the cam in the CCW direction before removing the cam from the cutter body.




Note: Make sure to place the cam all the way in.

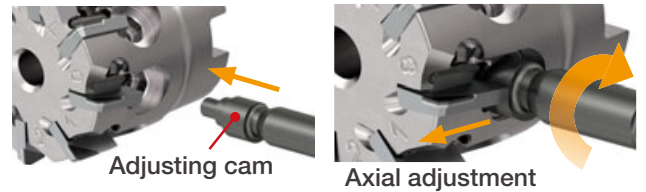

Note: If the desired height is not reached and is exceeded during adjustment, loosen the wedge and push the insert all the way to the pocket bottom, then start from Step 3.

6 Tighten the wedges




Firmly tighten the wedges to 2 N·m (2.58 ft-lb). In order to prevent body deformation from tightening, it is recommended to perform the final tightening alternatively. Do not exceed the recommended clamping torque when fixing the insert. This may damage or fracture the screw.

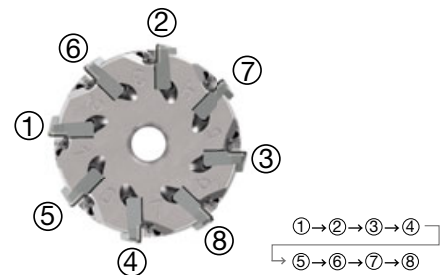

7 Final adjustments

For the final axial adjustment, instead of setting the insert height close to the target position, set so that it reaches approximately 5 μ m above the target. Slightly rotate the cam CCW to remove the key off the body. The insert will go down by 5 μ m to the target height when the cam is removed. It is recommended that the inserts be set to less than 5 μ m axially in relation to one another.

PRACTICAL EXAMPLES

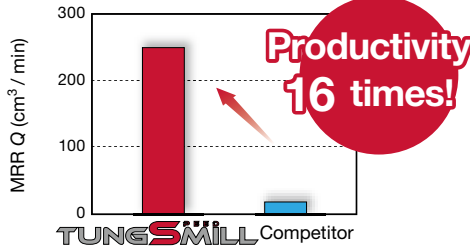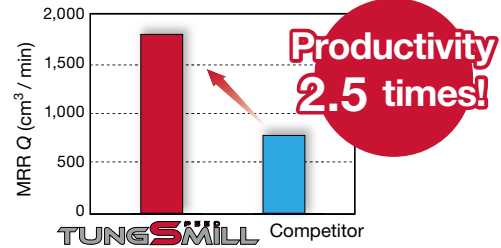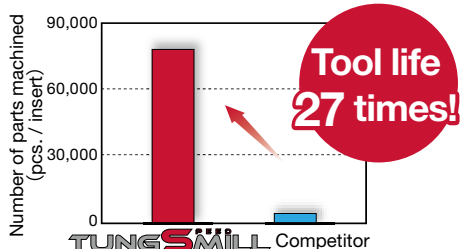Workpiece type		Hoist body part	Crank casing
Cutter		TPYD06J080B25.4R16 (DC = 80 mm, CICT = 16)	TPYD06J100B31.7R22 (DC = 100 mm, CICT = 22)
Insert		YDEN0603PDFR-D	YDEN0603PDFR-D
Grade		DX110	DX110
Workpiece material		High pressure aluminum die cast (ADC12)	High pressure aluminum die cast (ADC12)
		 N	 N
Cutting conditions	Cutting speed: Vc (m/min)	2,011	3,142
	Feed per tooth: fz (mm/t)	0.1	0.09
	Feed speed: Vf (mm/min)	12,800	20,000
	Depth of cut: ap (mm)	4/1	4.5/1.5
	Width of cut: ae (mm)	5 - 20	10 - 70
	Machining	Face milling	Face milling
	Coolant	Wet (External)	Wet (Internal)
	Machine	Vertical M/C, BT50	Vertical M/C, BT40
Results		 MRR was improved by 16 times, with increased table feed and reduced number of passes. Deburring inserts eliminated burr formation.	 MRR was improved by 2.5 times thanks to super high density cutter design.
Workpiece type		Cover	Cylinder head
Cutter		TPYD06M050B22.0R10 (DC = 50 mm, CICT = 10)	Special TPYD06 body (DC = 75 mm, CICT = 15)
Insert		YDEN0603PDFR-D	YDEN0603PDSR-D
Grade		DX110	DX110
Workpiece material		High pressure aluminum die cast (ADC12)	Cast aluminum alloy (AC2B)
		 N	 N
Cutting conditions	Cutting speed: Vc (m/min)	1,256	990
	Feed per tooth: fz (mm/t)	0.05	0.04
	Feed speed: Vf (mm/min)	-	2,849
	Depth of cut: ap (mm)	0.5	0.5
	Width of cut: ae (mm)	~ 40	- 70
	Machining	Face milling	Face milling
	Coolant	Wet (Internal)	Wet (Internal)
	Machine	Vertical M/C, BT30	Specialized machine
Results		 MRR was improved by 2 times thanks to super high density cutter design.	 Wear resistant DX110 PCD grade dramatically improved the tool life by 27 times.

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
tungaloy.com/jp

Tungaloy-NTK America Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
tungaloy.com/us

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
tungaloy.com/ca

Tungaloy-NTK De Mexico S.A.

C. Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
tungaloy.com/mx

Tungaloy-NTK do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
tungaloy.com/br

Tungaloy-NTK Germany GmbH.

Katzbergstr. 3a
D-40764 Langenfeld, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
tungaloy.com/de

Tungaloy France s.a.s

Les Fjords
19 avenue de Norvège
91140 Villebon Sur Yvette, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
tungaloy.com/fr

Tungaloy Italia S.r.l.

Viale Sarca 336/Edificio 13
20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
tungaloy.com/it

Tungaloy Czech s.r.o.

Turanka 1583/115g,
627 00 Brno, Czech Republic
Phone: +420-532 123 391
tungaloy.com/cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
tungaloy.com/es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
Fax: +46-462119207
tungaloy.com/se

Tungaloy Rus, LLC

Andropova avenue, h.18/7,
11 floor, office 3, 115432,
Moscow, Russia
Phone: +7-499-683-01-80
Fax: +7-499-683-01-81
tungaloy.com/ru

Tungaloy Polska Sp. z o.o.

Ul. Irysowa 1, 55-040 Bielany
Wrocławskie, Poland
Phone: +48 607 907 237
tungaloy.com/pl

Tungaloy-NTK UK Ltd.

Suite 3, Pioneer House, Mill Street,
Cannock, WS11 0EF, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
tungaloy.com/uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
tungaloy.com/hu

Tungaloy Turkey

Serifali Mah.bayraktar Bulvari Kule Sk. No:26
34775 Umraniye / Istanbul / Turkey
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
tungaloy.com/tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
tungaloy.com/nl

Tungaloy Croatia

Ulica bana Josipa Jelačića 87,
10430, Samobor, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
tungaloy.com/hr

Tungaloy Cutting Tool (Shanghai) Co. Ltd.

Room 701, 7th Floor,
No.1 Lane 388 Kang'an Road,
Pudong New Area, Shanghai, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
tungaloy.com/cn

Tungaloy Cutting Tools Taiwan Co. Ltd.

9F. No.293, Zhongyang Rd,
Xinzhuang Dist, New Taipei City,
24251 Taiwan
Phone: +886-2-8521-9986
Fax: +886-2-8521-8935
tungaloy.com/tw

Tungaloy-NTK Cutting Tool (Thailand) Co.,Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
tungaloy.com/th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #08-09 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
tungaloy.com/sg

Tungaloy-NTK Vietnam LLC

Floor 3, Licogi 13 Tower, No.164 Khuat Duy
Tien Street, Thanh Xuan Ward, Ha Noi,
Vietnam
Phone: +84 24 63282086
tungaloy.com/vn

Tungaloy India Pvt. Ltd.

One International Center,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai 400013, India
Phone: +91-22-6124-8803
Fax: +91-22-6124-8899
tungaloy.com/in

Tungaloy-NTK Korea

1040 Gachang-ro, Gachang-myeon,
Dalseong-gun, Daegu, 42936, Korea
Phone: +82-53-760-7698
Fax: +82-53-768-9912
tungaloy.com/kr

Tungaloy Malaysia Sdn Bhd

B715, Block B, Kelana Square, No 17,
Jalan SS7/26, Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan,
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
tungaloy.com/my

Tungaloy Australia Pty Ltd

Unit 68 14/70 Ferntree Gully Road
Knoxfield 3180 Victoria, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
tungaloy.com/au

PT. Tungaloy Indonesia

Ruko Blok AA.10 No3&5, Grand Wisata,
Lembangjaya, Tambun Selatan, Bekasi,
17510 Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
tungaloy.com/id



tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

www.youtube.com/tungaloycorporation

Distributed by:



Tungaloy APP & SNS



FIND US ON THE CLOUD!
machiningcloud.com

QR Code is registered trademark of DENSO WAVE INCORPORATED.