


NOTE: J1 is NOT a Qwiic connector.  
It uses a benign "compatible" pinout to prevent damage but is not functional as an I2C device.

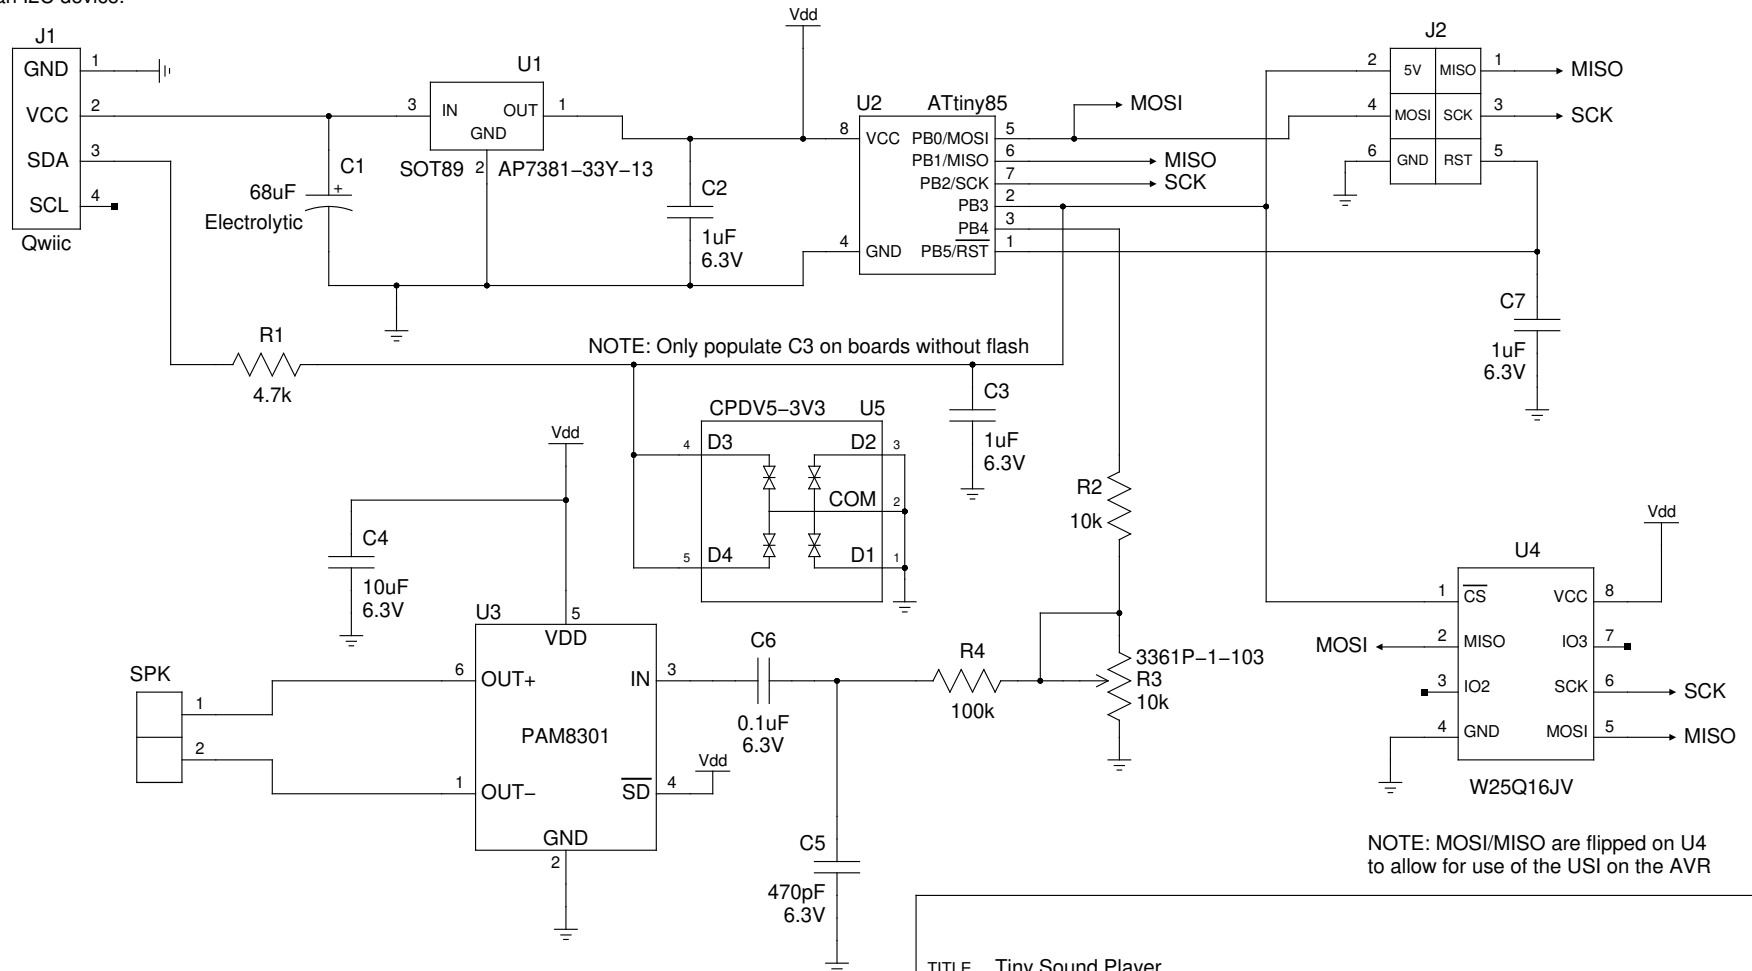

NOTE: MOSI/MISO are flipped on U4 to allow for use of the USI on the AVR

TITLE Tiny Sound Player

FILE: ckt-dingdong.sch

PAGE 1 OF 1

REVISION:

DRAWN BY: Michael Petersen