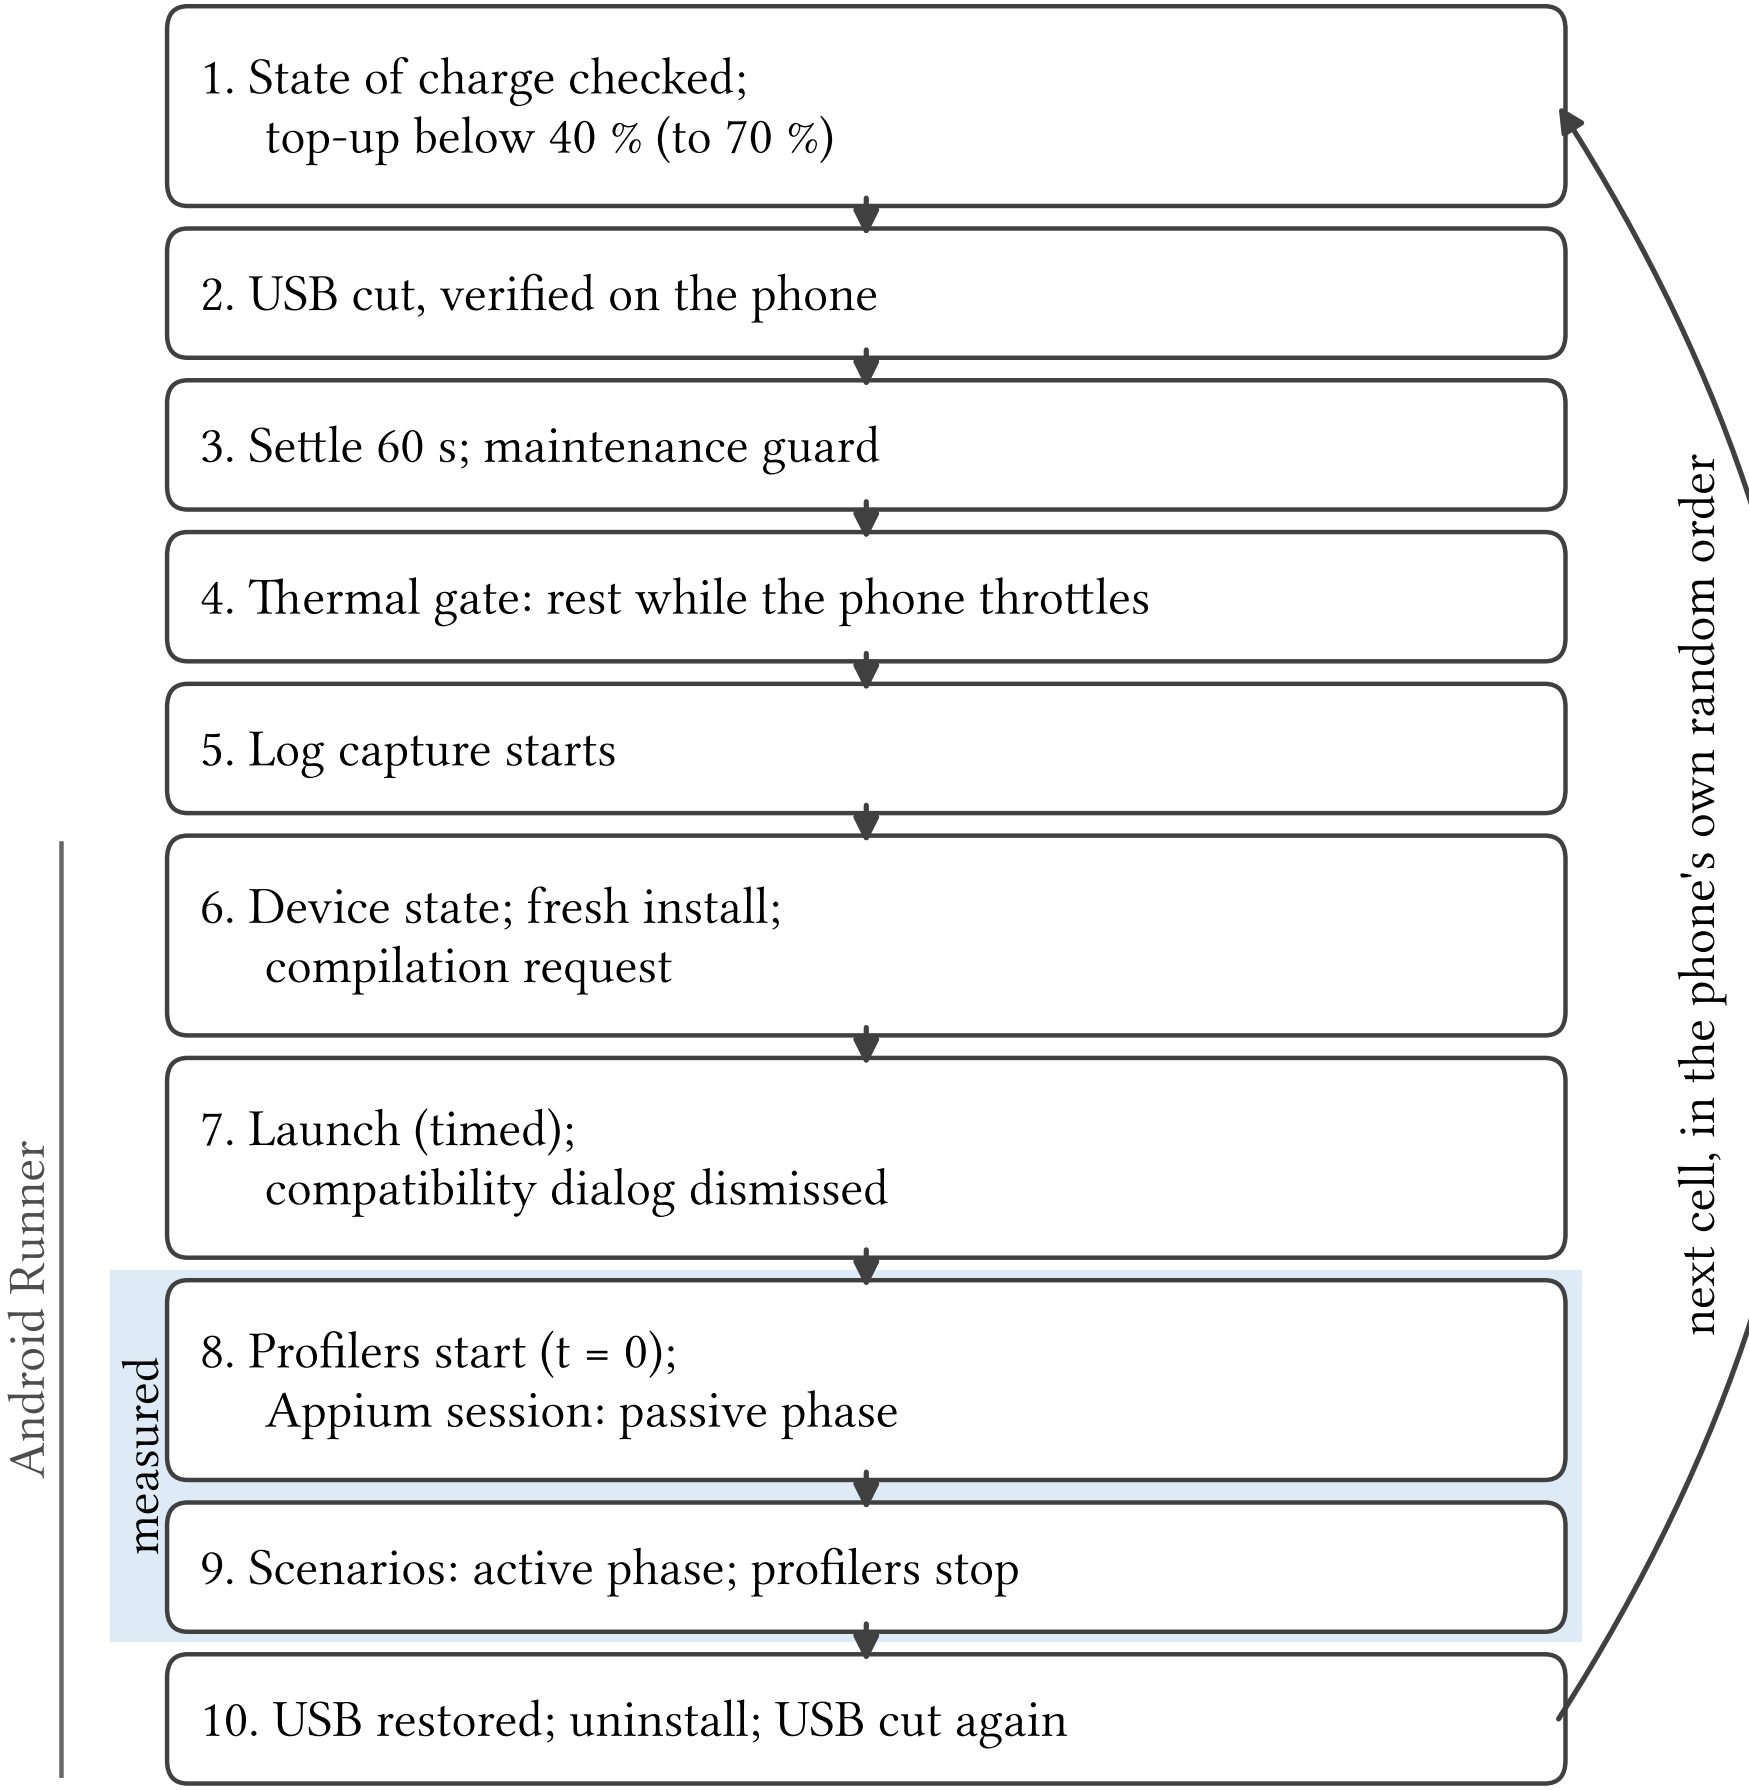
1. State of charge checked;
top-up below 40 % (to 70 %)
2. USB cut, verified on the phone
3. Settle 60 s; maintenance guard
4. Thermal gate: rest while the phone throttles
5. Log capture starts
6. Device state; fresh install;
compilation request
7. Launch (timed);
compatibility dialog dismissed
8. Profilers start (t = 0);
Appium session: passive phase
9. Scenarios: active phase; profilers stop
10. USB restored; uninstall; USB cut again
measured
Android Runner
next cell, in the phone's own random order