

SPECIFICATIONS						
PARAMETERS	VALUES	UNITS				
RATED VOLTAGE	3	Vdc				
OPERATING VOLTAGE RANGE	2 ~ 5	Vdc				
RATED CURRENT (MAX)	9	mA				
MINIMUM SPL @ 10 CM	100	dBA				
RESONANT FREQUENCY	3,500 ± 500	Hz				
TONE OR PULSE RATE	CONTINUOUS	0 pulse/sec				
OPERATING TEMPERATURE	-30 ~ +70	°C				
STORAGE TEMPERATURE	-40~ +85	°C				
HOUSING MATERIAL	PBT	-				
TERMINAL MATERIAL	Sn PLATED					
I ERIVIINAL IVIA I ERIAL	COPPER					
WEIGHT	8	grams				

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY							
LTR	DESCRIPTION	DATE	APPROVED				
-	RELEASED FROM ENGINEERING	3/22/2006					
Α	REVISED BODY HEIGHT DIMENSION	4/18/2008	B.R.				
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	6/14/2008	B.R.				
С	REVISED HEIGHT AND STAND-OFF DIMENSIONS	9/23/2011	M.L.				
D	NEGATIVE POLARITY MARK REMOVED POSITIVE POLARITY MARK RECESSED	7/6/2017	M.V.				
E	REVISED HOUSING DIMENSIONS	8/21/2017	M.L.				

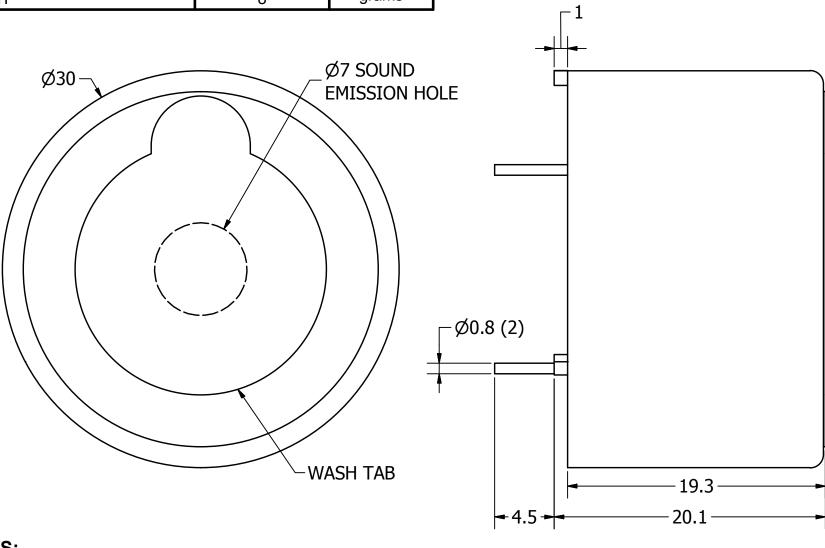

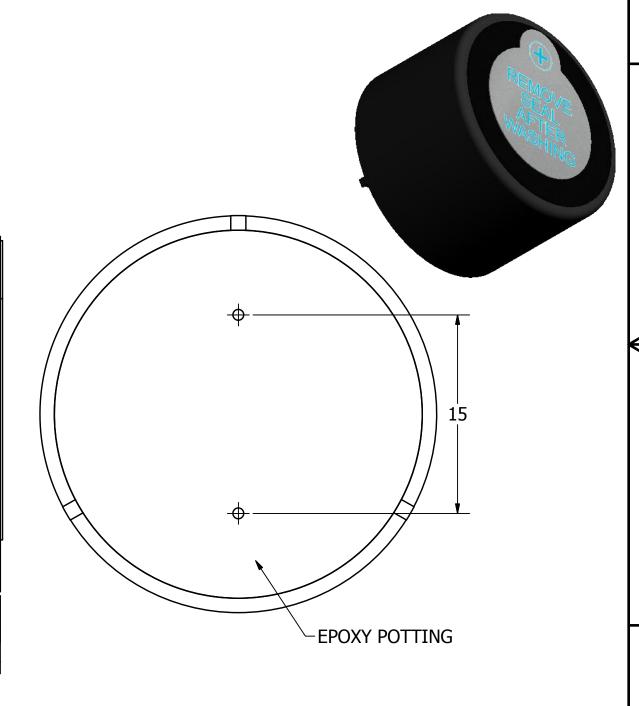

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE Desi
SI7F
DIMENSIONS ARE IN MILLIMETERS.
TOLERANGES A 2
TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.
AI-3035-TWT-3V-R.idw

\sim	5.05 - 01.07 81909		AT 20	2F T)	A/T 2\/	
T.G.	3/22/2006	B.R.	3/22/2006	E.P.	3/22/2006	6/14/2008
Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date

I O Inc unlimited company

AI-3035-TWT-3V-R

Indicator

- 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: