

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC

DIST

REVISIONS

P


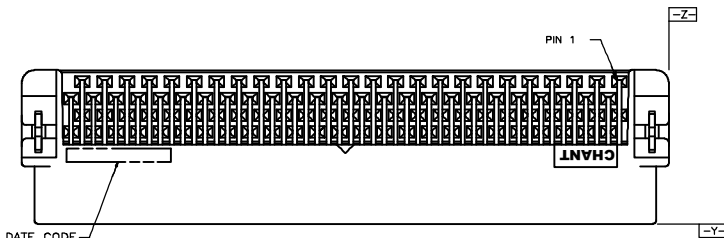
LTR

DESCRIPTION

DATE

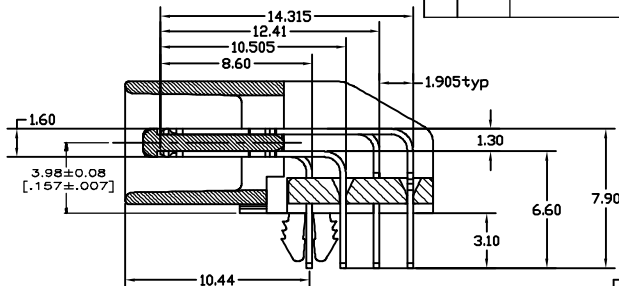
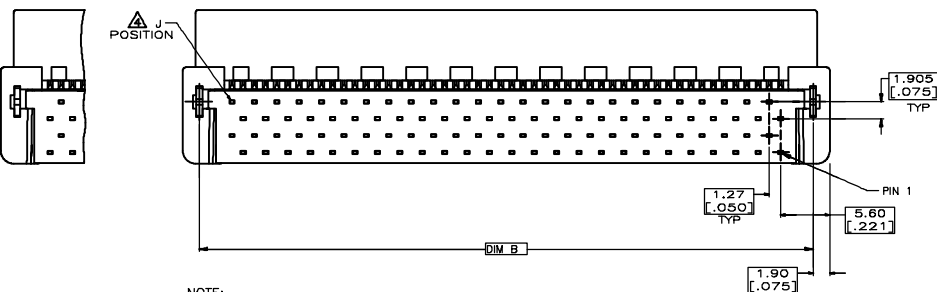
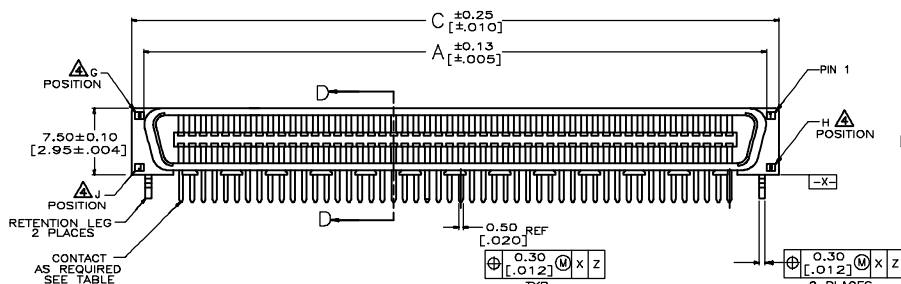
DWN

APVD

FOR 26, 30, 50  
POSITIONS ONLY

DATE CODE

FOR 20, 40, 60, 68, 80, 100, 120 POSITIONS ONLY

SECTION D-D  
SCALE 8:1

NOTE:

1. MATERIAL:

HOUSING: LCP, UL 94V-0, BLACK COLOR.

CONTACTS: PHOSPHOR BRONZE.

BOARDLOCKS: BRASS. (Phosphor bronze)

FINISH:

CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,

3.81μm [150μ"] MIN. MATTE-TIN ON SOLDER TAIL, OVER

1.27μm [50μ"] MIN. NICKEL UNDERPLATED.

BOARDLOCKS: 3.81μm [150μ"] MIN. TIN-Cu OVER

1.27μm [50μ"] MIN. UNDERPLATED.

3. WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC.

109-202, CONDITION B.

G, J, H INDICATE NUMBER OF POSITION MARKED ON ASSEMBLY.

ALSO SEE TABLE.


GOLD FLASH OVER

0.762μm [30μ"] MIN. PALLADIUM-NICKEL PLATED.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

SEE NOTE

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:0 PLC ± -  
1 PLC ± 0.25  
2 PLC ± 0.2  
3 PLC ± -  
4 PLC ± -  
ANGLES ± -

FINISH

SEE NOTE

DWN

CHK

APVD

PRODUCT SPEC [产品规格]

APPLICATION SPEC [适用规范]

AMP MOLEX

WEIGHT

CUSTOMER DRAWING

NAME [名称]

PLUG ASSEMBLY, R/A, BTB, CHANT 1.27 SERIES

1.27系列全塑型SCSI插头[公头], R/A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

[代码]

C-1734099

SCALE

SHEET

1 OF 4

REV

E1