

Near Field Communication Wireless Power Transfer with Energy Harvesting Capability

Isa Al-Khalifa - M00736430

Abstract: Wireless Power Transfer (WPT) is an emerging technology that enables the transfer of electrical energy from a power source to a device without the use of wires or connectors. WPT is currently being developed for a wide range of applications, including electric vehicles, wireless charging of mobile devices, and implantable medical devices. However, the technology also faces several challenges, including low power transfer efficiency, limited range, and electromagnetic interference. NFC (Near Field Communication) technology was first introduced in 2002 as an extension of RFID technology, enabling simple contactless data transfer between 2 devices. NFC can be used for WPT on low power applications, as the amount of power that can be transferred is low. Energy harvesting refers to the process of capturing and storing small amounts of energy from the environment or from a system and converting it into usable electrical power. This technique can be used to power low-power devices, sensors, and other electronics that require small amounts of energy. The review covers an overview of the WPT technology, particularly focusing on the one based on inductive coupling and the main challenges that must be resolved in order to unblock the commercialization of the full potential of this technology. Then the review shows how NFC can be used for WPT and the pros/cons of this technology compared to other near and far fields WPT. Finally, an overview of the state of art of the energy harvesting technology and how it can be used for building battery less sensors systems. Some examples of already existing applications will be showed too.

Keywords: Battery less systems; Energy Harvesting; Energy Transfer; Inductive WPT, IoT; Near Fields Communication; NFC; WPT; Wireless Power Transfer.

1. Introduction

Wireless power transfer (WPT) was originally proposed by Nikola Tesla and the end of 19th century [1]. Tesla did study how to transfer power on near fields using inductive coupling and in the far fields using radio waves. The earliest forms of wireless power technology were developed in the 1800s, thanks to the invention of the transformer, which involved inductive power transfer between wire coils placed near one another. Resonant inductive wireless energy transfer was employed successfully in the 1960s for implantable medical devices, such as artificial hearts and pacemakers [2]. Between 1970 and 1990, as microwave technology progressed, various research initiatives were launched to explore wireless charging options also for electric vehicles [3]. In recent times, there has been a surge in the commercialization of RFID technology at the 920-MHz band. This trend has been further amplified by the increasing prevalence of mobile rechargeable batteries, which has created a greater demand for wireless charging solutions in various applications.

In the past, neither inductive coupling nor magnetically coupled wireless power transfer technologies garnered much attention as a groundbreaking innovation. Inductive-coupling WPT had limited range between the transmitter and receiver, while magnetically

coupled WPT had low efficiency between them. However, the introduction of resonance-coupling WPT by the MIT group overcame these limitations and allowed for efficient wireless charging and battery-free electric devices. This breakthrough technology paved the way for the widespread recognition of WPT as a viable solution for these applications [4].

Wireless networks of the future will rely heavily on the Internet of Things (IoT) and massive machine-type communications, enabling an increasingly intelligent world with ambient-assisted living, smart control systems, and real-time data monitoring. To achieve this vision, trillions of low-power wireless sensors, actuators, and small computing devices must be pervasively connected to form cost-effective and self-sustainable wireless sensor networks (WSNs). Near field inductive coupling WPT are expected to be commercialized very soon. Far-field WPT via radio waves is expected to be commercialized following the commercialization of inductive-coupling WPT [5].

Beam focusing and Energy Harvesting are the most interesting features that make this technology attracting.

Near field communication (NFC) was standardized in 2004, which revolutionized the consumer electronics market and enabled various applications such as electronic transactions, mobile payments, and data transfer, among others, at the beginning of the 21st century. The technology has been used a lot for exchanging data in the near fields, and it is now raising a lot of interest because it can be used for WPT too. Various wireless charging solutions have been suggested, but compared to them, combining NFC and wireless charging in the same implementation can result in more cost-effective and compact charging interfaces for portable devices, a wider charger infrastructure in the future with reduced costs, and the potential to integrate NFC-based services into charging applications.

Currently, WPT and energy harvesting are not feasible for far-field applications due to low efficiency between the transmitter and receiver. Although wide beams WPT has the potential to increase the distance, the technology is not yet mature.

Energy harvesting in near field communication (NFC) technology has become an area of increasing interest in recent years. NFC energy harvesting typically relies on magnetic induction or capacitive coupling, where energy is harvested from the near field of an NFC reader or another NFC-enabled device. The harvested energy can then be used to power low-power electronic devices, such as sensors or RFID tags. NFC energy harvesting has the advantage of being able to operate at very low power levels and can potentially provide an infinite source of power to electronic devices near an NFC-enabled device. However, the amount of energy that can be harvested is limited by the strength of the magnetic or electric field generated by the NFC device, which decreases rapidly with distance.

In this literature review I first show an overview of WPT using inductive coupling, focusing on the distance within where the power can be transferred with best efficiency and performance. Then I will look at how NFC can be used for WPT and how to integrate Energy harvesting for creating a battery less sensors system. I will talk about the pros and cons comparing NFC WPT to other WPT solutions. The comparison includes the advantages/disadvantages of near fields WPT applications with the far field ones, discussing the potential applications that could be unblocked when some WPT challenges will be solved. Finally, some examples of applications where NFC WPT and Energy harvesting is already used for creating battery less sensors systems.

2. Wireless Power Transfer

Wireless power transfer (WPT) is a method of transmitting electrical power from a power source to an electrical load without the need for physical connections such as wires. There are several different types of WPT technologies, each with their own unique characteristics and advantages [6]:

- Inductive coupling: This is the most used form of WPT, which uses electromagnetic fields to transfer energy between two coils. The primary coil is connected to the power source, and the secondary coil is connected to the load. The energy is transferred when the two coils are placed near each other.
- Resonant coupling: This method uses resonant circuits to enhance the energy transfer between the two coils. The system is designed to match the resonant frequency of the two coils, resulting in a higher efficiency of energy transfer.
- Radio frequency (RF) coupling: This method uses high-frequency electromagnetic waves to transfer energy from the power source to the load. The energy is received by a rectifying circuit that converts the RF signal into DC power.
- Magnetic resonance coupling: This technology is based on the principle of magnetic resonance, where energy is transferred between two objects that have the same natural frequency. The power source generates a magnetic field that is then picked up by a resonant receiver, which converts the energy into electrical power.
- Laser power transfer: This technology uses laser beams to transfer energy from a power source to a receiver. The power is transmitted through the air, and the receiver converts the laser energy into electrical power.

2.1 WPT classifications

WPT can be classified in several ways, depending on the perspective and criteria used. Following the three common classifications [6]:

- Distance over which power is transmitted:
 - o Near-field WPT: This category includes technologies that transfer power over a short distance, typically less than a wavelength of the electromagnetic wave used. Near-field WPT technologies include inductive coupling, capacitive coupling, and magnetic resonant coupling.
 - o Far-field WPT: This category includes technologies that transfer power over a long distance, typically greater than a wavelength of the electromagnetic wave used. Far-field WPT technologies include radio frequency (RF) coupling, microwave beamforming, and laser power transfer.
- Frequency range of the electromagnetic wave used for power transmission:
 - o Low-frequency WPT: This category includes technologies that use frequencies below 100 kHz, such as inductive coupling and capacitive coupling.

- High-frequency WPT: This category includes technologies that use frequencies above 100 kHz, such as magnetic resonant coupling, RF coupling, and microwave beamforming.
- The power level of the application (from milliwatts to megawatts):
 - Low-power WPT: This category includes applications that require power levels below 1 W, such as wireless charging of mobile devices and wearables.
 - Medium-power WPT: This category includes applications that require power levels between 1 W and 1 kW, such as wireless charging of electric vehicles and drones.
 - High-power WPT: This category includes applications that require power levels above 1 kW, such as wireless power transmission for industrial and grid-scale applications.

2.2 Inductive WPT

Inductive WPT (IWPT) systems have been a popular choice for modern short-range wireless power transfer applications since the 1990s.

IWPT is a type of near-field WPT technology that uses magnetic induction to transfer power between two coils. This technology is based on the principle of electromagnetic induction, which states that a changing magnetic field can induce an electromotive force (EMF) in a nearby conductor. In inductive WPT the transmitter coil is energized by an alternating current (AC) source, which generates a magnetic field that induces a voltage in the receiver coil. This voltage is then rectified and used to power the load. Inductive WPT is commonly used for low-power applications, such as charging mobile devices and wearable technology. It has a short-range transmission distance of up to a few centimeters, making it suitable for applications where the transmitter and receiver coils can be in proximity. One of the main advantages of inductive WPT is its efficiency, which can be as high as 90% for well-designed systems. However, the efficiency can be affected by the distance between the coils, the orientation and the alignment of the coils [6].

The reasons for using the near-field magnetic coupling and resonance techniques together are for compensating the leakage inductance.

For efficient wireless power transfer, it was demonstrated that using magnetic resonance between a pair of magnetically coupled coil resonators allow to achieve optimal energy transfer [7].

2.3 Fundamental Power Transfer Concepts – Maximum Power Transfer and Maximum energy efficiency

2.3.1 Maximum Power Transfer

The maximum power transfer principle is a fundamental concept in electrical engineering that relates to the transfer of power from a source to a load. The principle states that the maximum amount of power is transferred from a source to a load when the

impedance of the load matches the impedance of the source. In other words, the maximum power is transferred from the source to the load when the impedance of the load is equal to the impedance of the source. If the impedance of the load is lower than the impedance of the source, then some of the power is reflected to the source, resulting in a lower amount of power being transferred to the load. If the impedance of the load is higher than the impedance of the source, more power is dissipated in the source and therefore less power is transferred to the load.

The maximum power transfer principle is important in many practical applications, such as audio systems, power amplifiers, and power supplies. It is used to design circuits that can transfer maximum power from the source to the load, which results in efficient and optimal operation of the circuit [8].

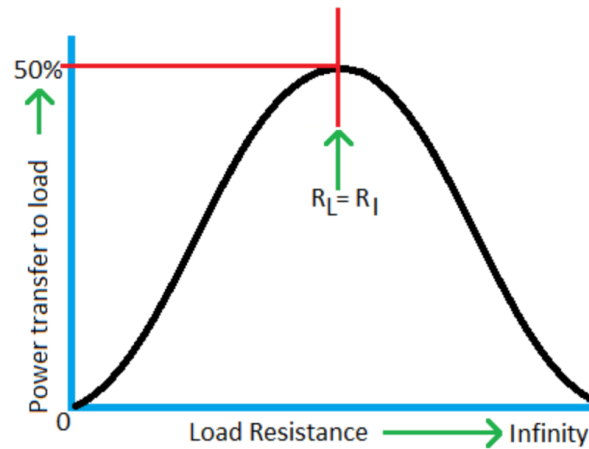


Figure 1 - Power dissipated in a load, versus load resistance

2.3.2 Maximum Energy Efficiency

The maximum energy efficiency principle is a concept that relates to the efficient use of energy in a system. The principle states that the maximum energy efficiency is achieved when the power output of a system is matched to the power demand of the load.

A system operates at maximum energy efficiency when the power output of a system is equal to the power demand of the load. If the power output of the system is lower than the power demand of the load, then the system doesn't work at max energy efficiency simply because it could operate with higher power. Instead, if the power output of the system is higher than the power demand of the load, then the excess energy is wasted, and the system is not operating at maximum energy efficiency.

The maximum energy efficiency principle is used in several applications, such as electric motors, HVAC systems, power plants and renewable energy systems [8].

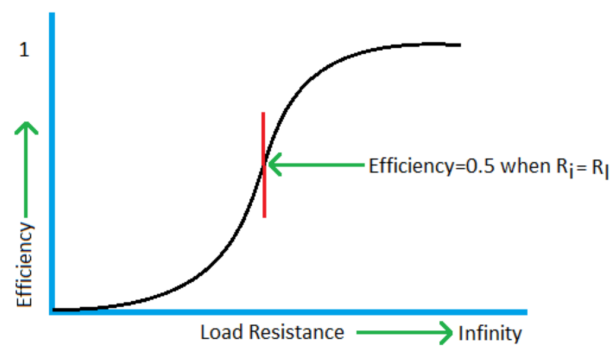


Figure 2 - Power transfer efficiency vs Load resistance

3 Near field communication magnetism – NFC and RFID

NFC (Near Field Communication) and RFID (Radio Frequency Identification) are both wireless communication technologies that are used for identification and data transfer. While they share some similarities, there are several key differences between the two technologies.

The main difference between NFC and RFID is the range of communication. NFC is designed for short-range communication, typically between two devices that are held in proximity (less than 10 cm). This short-range communication is achieved through inductive coupling between the devices. In contrast, RFID can operate over much longer distances, typically several meters, and can be used for tracking and identification of objects over a wide area.

Another difference is their data transfer rates. NFC typically has a much slower data transfer rate than RFID, with a maximum data transfer rate of around 424 kbps. RFID, on the other hand, can achieve much higher data transfer rates, up to several megabits per second.

NFC and RFID also differ in their power requirements. NFC devices typically do not require an external power source, as they can be powered through the electromagnetic field generated by another NFC device. In contrast, RFID devices typically require an external power source, such as a battery, to power the communication between the RFID reader and the RFID tag.

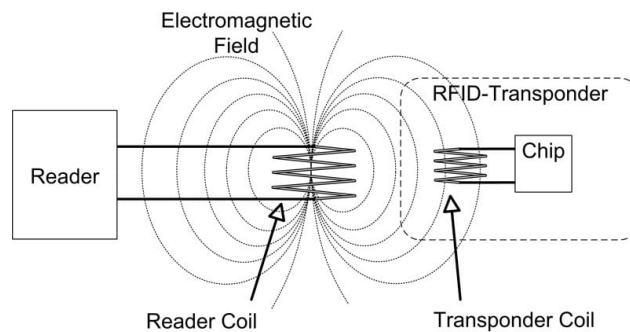


Figure 3 - Data transfer between Reader and Tag

3.1 NFC basic concepts

NFC was first introduced in 2002 by Sony and Philips, as an extension of RFID technology [9]. The initial purpose of NFC was to enable simple and secure contactless transactions, such as mobile payments, by allowing two devices to communicate with each other when held in proximity (typically within 10 cm). Since its introduction, NFC has continued to evolve, with improvements in speed, security, and functionality. Today, NFC is widely used in a variety of applications, such as mobile payments, contactless ticketing, data transfer, and access control. One of the key drivers behind the growth of NFC technology has been the widespread adoption of smartphones, which are now equipped with NFC chips that allow users to make mobile payments, share files, and connect to other NFC-enabled devices [9].

An NFC system is composed by:

- **NFC Reader/Writer:** This is the device that reads and writes data to the NFC tag. It can be a smartphone, tablet, or other device that is equipped with an NFC chip.
- **Antenna:** The NFC reader/writer contains an antenna that is used to generate an electromagnetic field that powers the NFC tag and enables communication between the two devices.
- **NFC Tag:** This is the device that stores data and communicates with the NFC reader/writer. It can be a small sticker or embedded chip that is placed on or embedded in an object.
- **Memory:** The NFC tag contains a small amount of memory that can store data such as a website URL, contact information, or other types of data.
- **Modulation Circuit:** The NFC tag contains a modulation circuit that is used to encode and decode data between the tag and the reader/writer.
- **Power Management Circuit:** The NFC tag contains a power management circuit that regulates the amount of power received from the reader/writer to ensure proper operation of the tag.

NFC works with the principle of inductive coupling between the transmitter and the receiver.

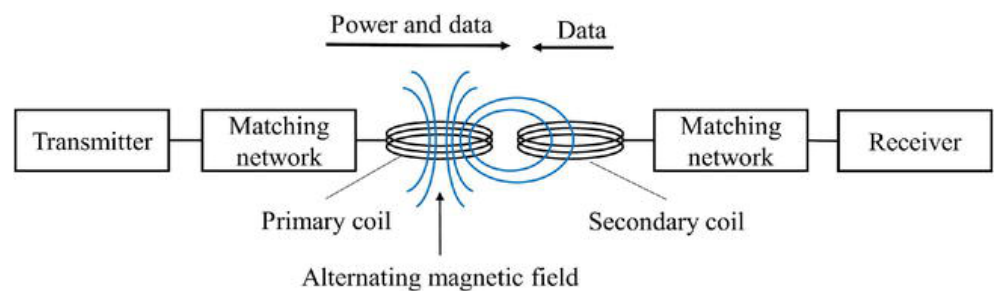


Figure 4 - Inductive coupling between transmitter and receiver coils

3.2 WPT for NFC

- Talk about how NFC can be used for WPT o How to optimize power transfer efficiency, distance where it works o Talk about the challenges and issues that come while using this systems (ie Eddy currents, usage of ferrite materials etc)

4 Energy harvesting

- Talk about energy harvesting in general
- How it can be used in IoT systems
- How it can be used in NFC systems
- Advances in these systems

5 Existing NFC WPT Applications with Energy harvesting

6. Conclusions

References

- [1] N. Tesla, "The transmission of electric energy without wires," *Electrical World*, Mar. 5, 1904.
- [2] Schuder, J. C. (2002). "Powering an artificial heart: Birth of the inductively coupled-radio frequency system in 1960". *Artificial Organs*
- [3] W. C. Brown, "The history of power transmission by radio waves," *IEEE Trans. Microw. Theory Tech.*, vol. 32, no. 9
- [4] Kurs, A., Karalis, A., Moffatt, R., Joannopoulos, J. D., Fisher, P., & Soljacic, M. (2007). Wireless Power Transfer via Strongly Coupled Magnetic Resonances. *Science*, 317(5834), 83-86. <https://doi.org/10.1126/science.1143254>
- [5] N. Shinohara, "Trends in Wireless Power Transfer: WPT Technology for Energy Harvesting, Millimeter-Wave/THz Rectennas, MIMO-WPT, and Advances in Near-Field WPT Applications," in *IEEE Microwave Magazine*, vol. 22, no. 1, pp. 46-59, Jan. 2021, doi: 10.1109/MMM.2020.3027935.
- [6] Sidiku, M.B. & Eronu, Emmanuel & Ashigwuike, Evans. (2021). A review on wireless power transfer: Concepts, implementations, challenges, and mitigation scheme. *Nigerian Journal of Technology*. 39. 1206-1215. 10.4314/njt.v39i4.29.
- [7] Ali, Esraa & Alibakhshikenari, Mohammad & Virdee, B.S. & Soruri, Mohammad & Limiti, Ernesto. (2021). Efficient Wireless Power Transfer via Magnetic Resonance Coupling Using Automated Impedance Matching Circuit. *Electronics*. 10. 2779. 10.3390/electronics10222779.
- [8] S. Y. R. Hui, W. Zhong and C. K. Lee, "A Critical Review of Recent Progress in Mid-Range Wireless Power Transfer," in *IEEE Transactions on Power Electronics*, vol. 29, no. 9, pp. 4500-4511, Sept. 2014, doi: 10.1109/TPEL.2013.2249670.
- [9] Poonam Lathiya and Jing Wang (2020) "Near-Field Communications (NFC) for Wireless Power Transfer (WPT): An Overview"