

Volcano Seismology

May 2021

- By, Isha Lohan

Center for Earth Sciences,
Indian Institute of Science, Bengaluru

Volcano Seismology



Brief summary of what we are going to see ahead...

1. We try to locate the source of magma and source of the volcanic earthquakes and tremors.
2. We try to understand the mechanism of magma injection in conduit and its pathway up to the earth surface.
3. We will study about the acoustic property of magmatic and hydrothermal fluid- by using fluid crack model.
4. Experimental modeling of gas expansion in volcanic conduit.
 - So that we understand its hazardous impact and predict its eruption.



Why seismic waves for imaging volcanoes?

We have many methods which could be used to do imaging and monitoring of volcanoes but seismology has some advantages over other methods like-

- Among all the other methods, seismic imaging provides us good resolution of data and precise estimates.
- It is hard to send long cables to deep down the earth so *electric resistivity* method has shallow depth of investigation, but seismology does not has any such limitations of depth.
- In *thermal imaging* from satellites or from ground, large amounts of ash and dust does not allow to record reliable data, but seismic instruments records most reliable data in any type of eruption or in any weather conditions.

Finding seismic sources of volcano

Can you think of a method analogous to triangulation method to find volcano's seismic source?

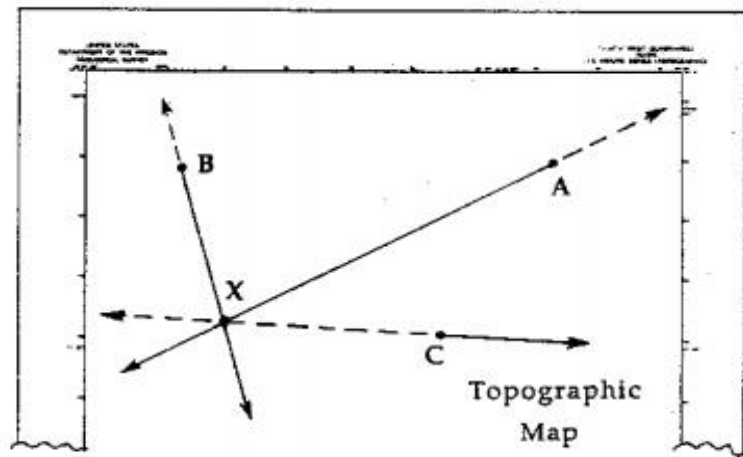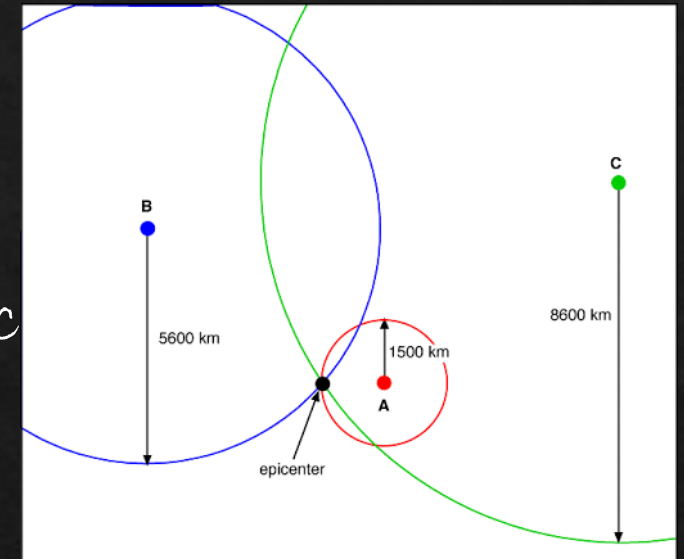


- A, B, C - Given points
- Azimuth line
- - -→ Back azimuth lines
- X - New point located by triangulation

Figure 3. A typical triangulation diagram.

As in earthquake seismology we use triangulation method to estimate the epicenter of earthquake, similarly we use a method of drawing back-azimuths from seismometers to 'roughly' locate the position of source of magma.

Let's see it with an example of Kilauea caldera...

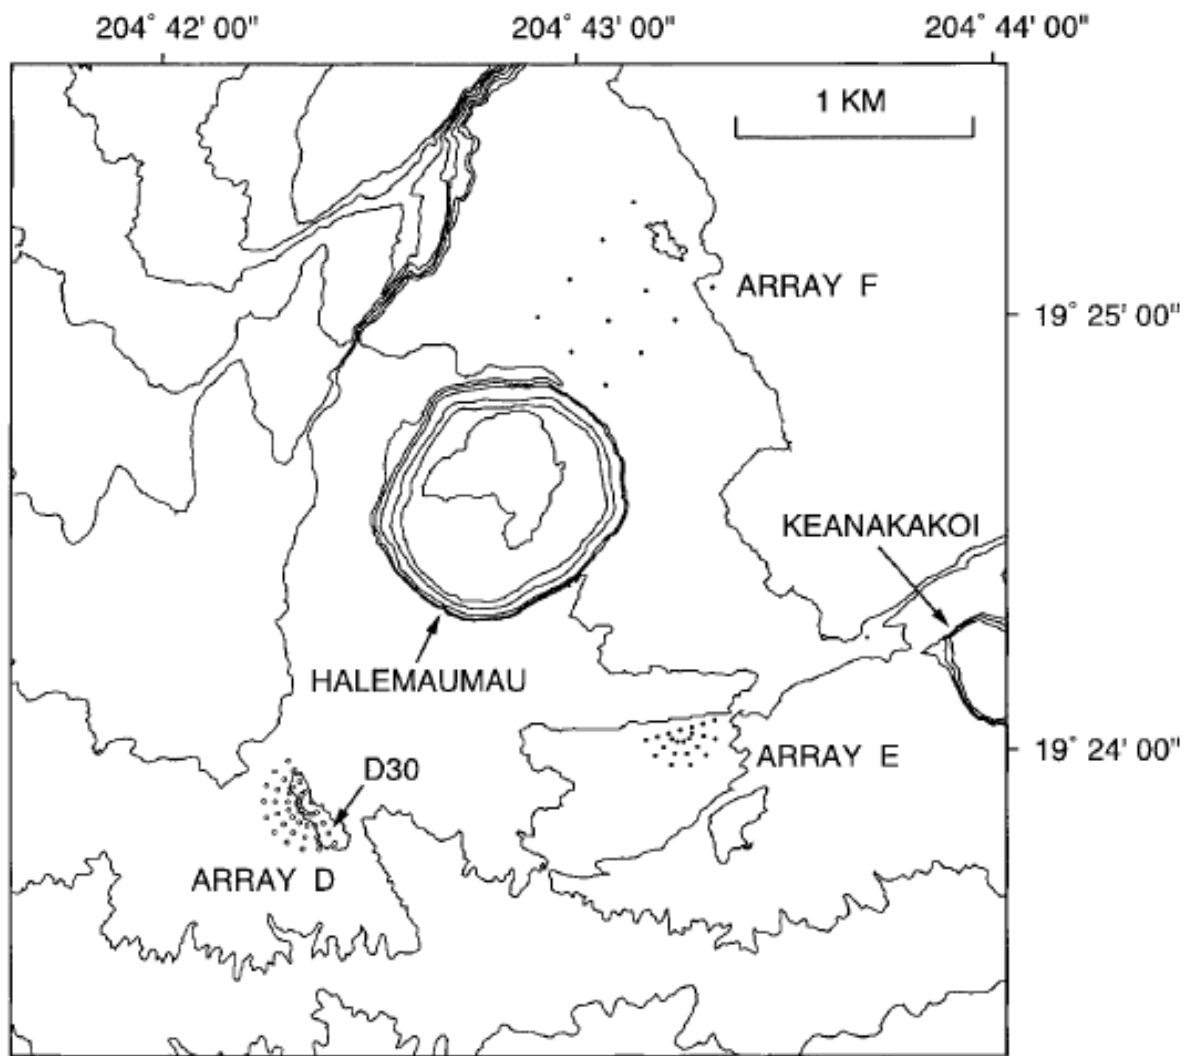

Array D- 41 sensors in semi-circle
 Array E- 33 sensors in semicircle
 Array F- 12 sensors in polygon shape

Why this specific shape of sensor arrays ???


= This shapes are chosen according to place's topography so to record maximum data.

Map of the southern extent of the Kilauea caldera region showing locations of pit craters, main topographic features, and seismic antennas deployed during the 1997 Japan-U.S. experiment.

- This Long Period data was taken with the Small Aperture Seismic Array.
- This data in fig below was taken from array D.
- It shows the temporal distributions of power, azimuth, and ray parameter.


Using the time interval of shaded region, we recorded the azimuths, and then find out their corresponding back-azimuths.

Azimuths for this same time interval from all three arrays were recorded and plotted on the topographical map of Kilauea caldera. It formed a triangular shape as shown in next figure.

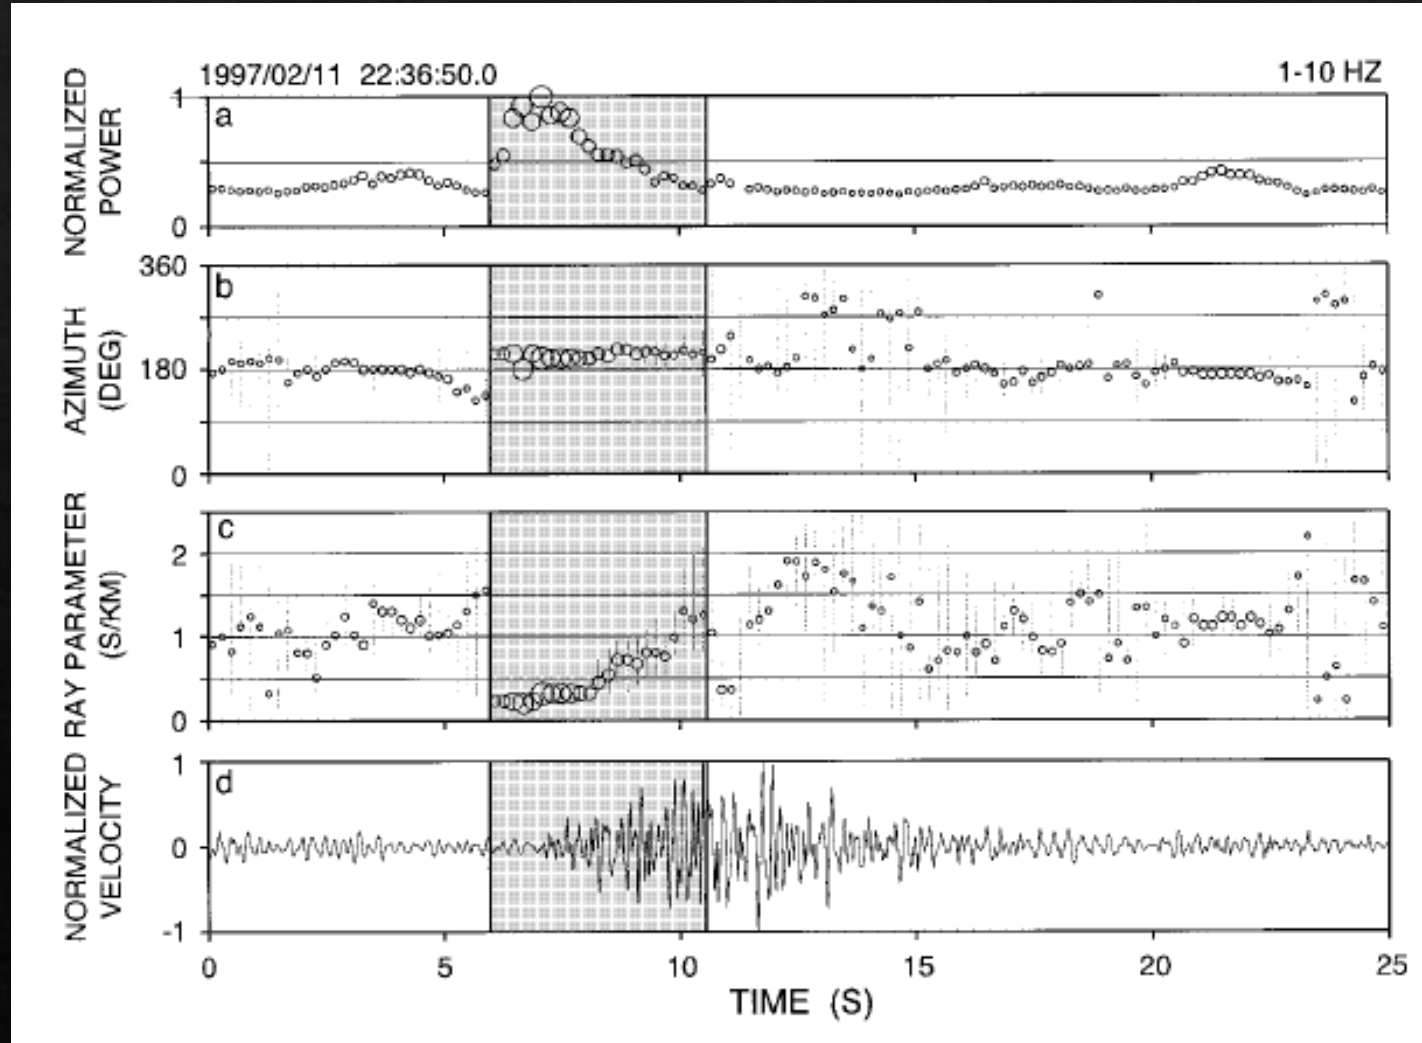


The back-azimuths for 5 sec interval formed wedges as in figure.

The intersection of these 3 wedges gives us the rough idea of the source location.

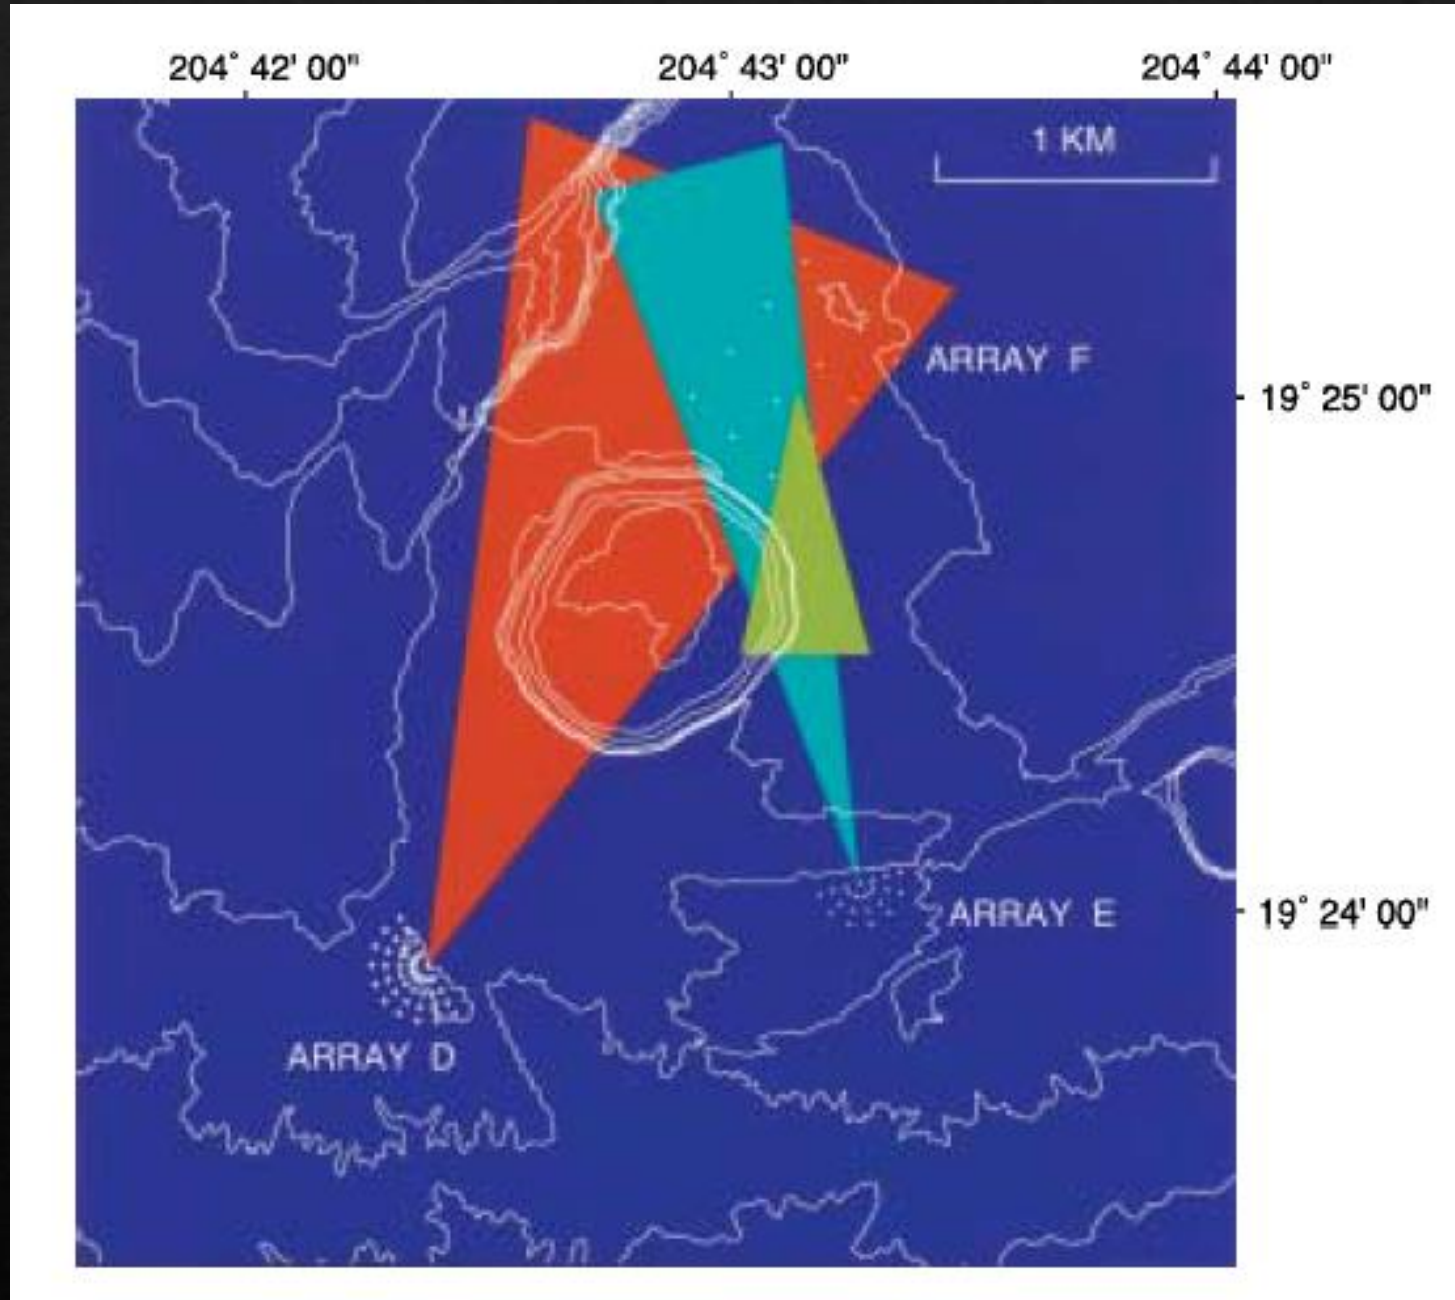


This shaded region
five seconds time
interval from 6th –
11th sec was used to
plot azimuths. But
why do we use this
particular time slot
and not some other
set of time?
THINK!

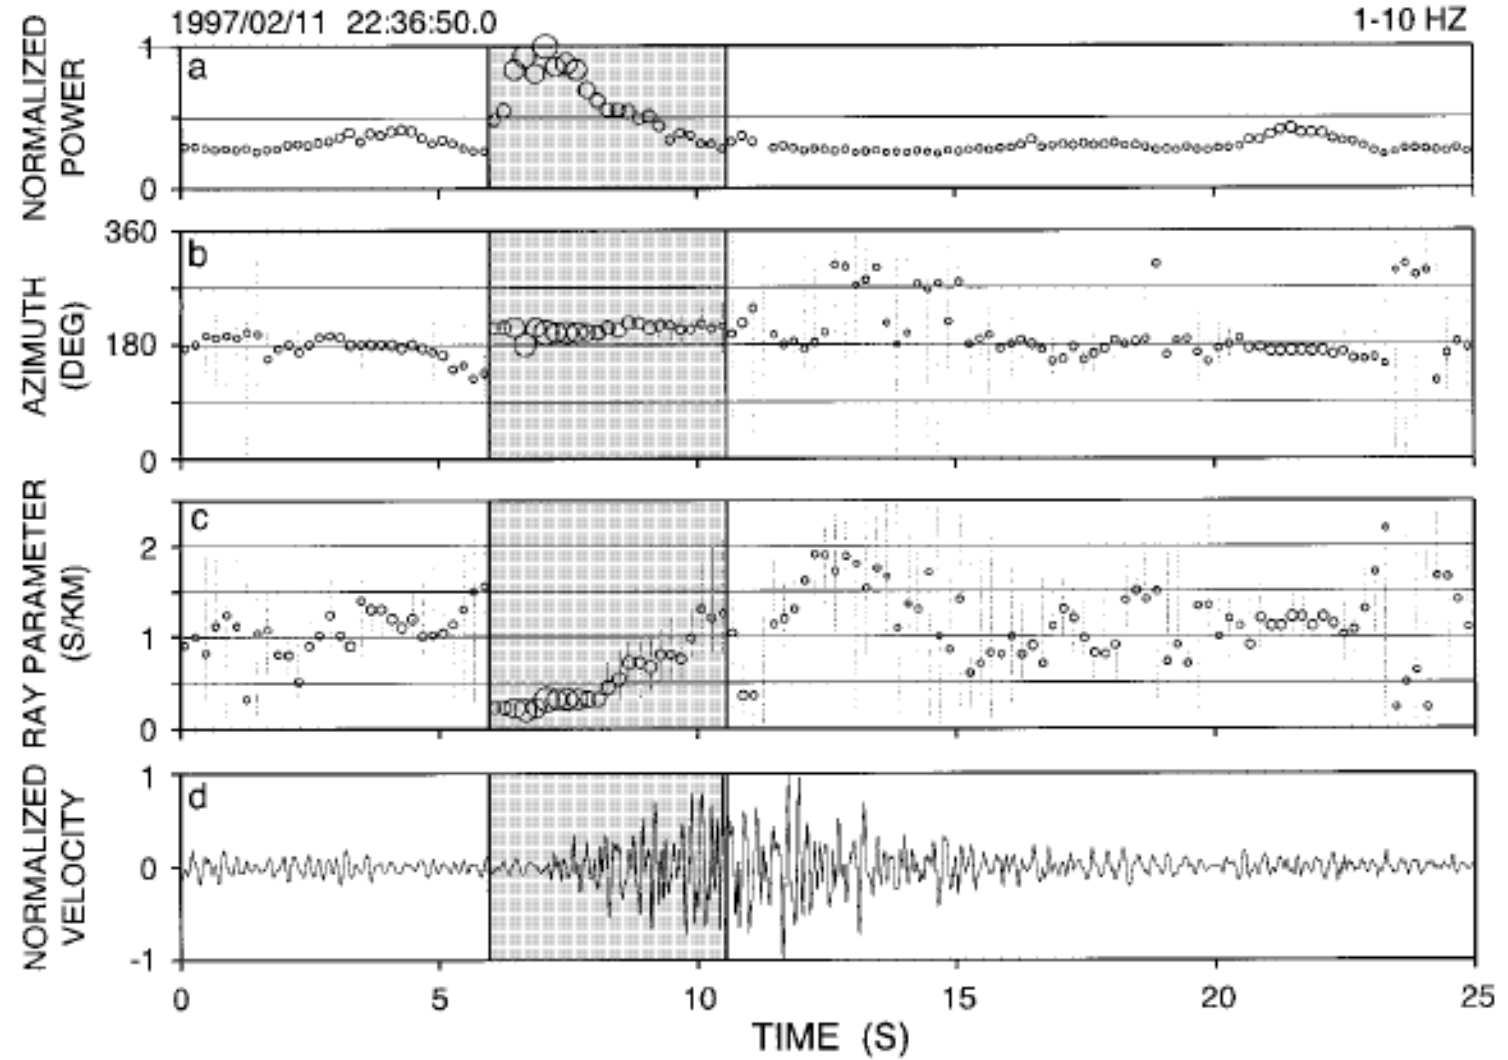

The direction of back-azimuths should give us most precise estimate of source direction, so from the data shown beside, we have to take such values of azimuths which can give us the direction from where the maximum energy comes within short time interval.

To estimate the directional properties, we take time interval characterized by enhanced power and most stable azimuths.

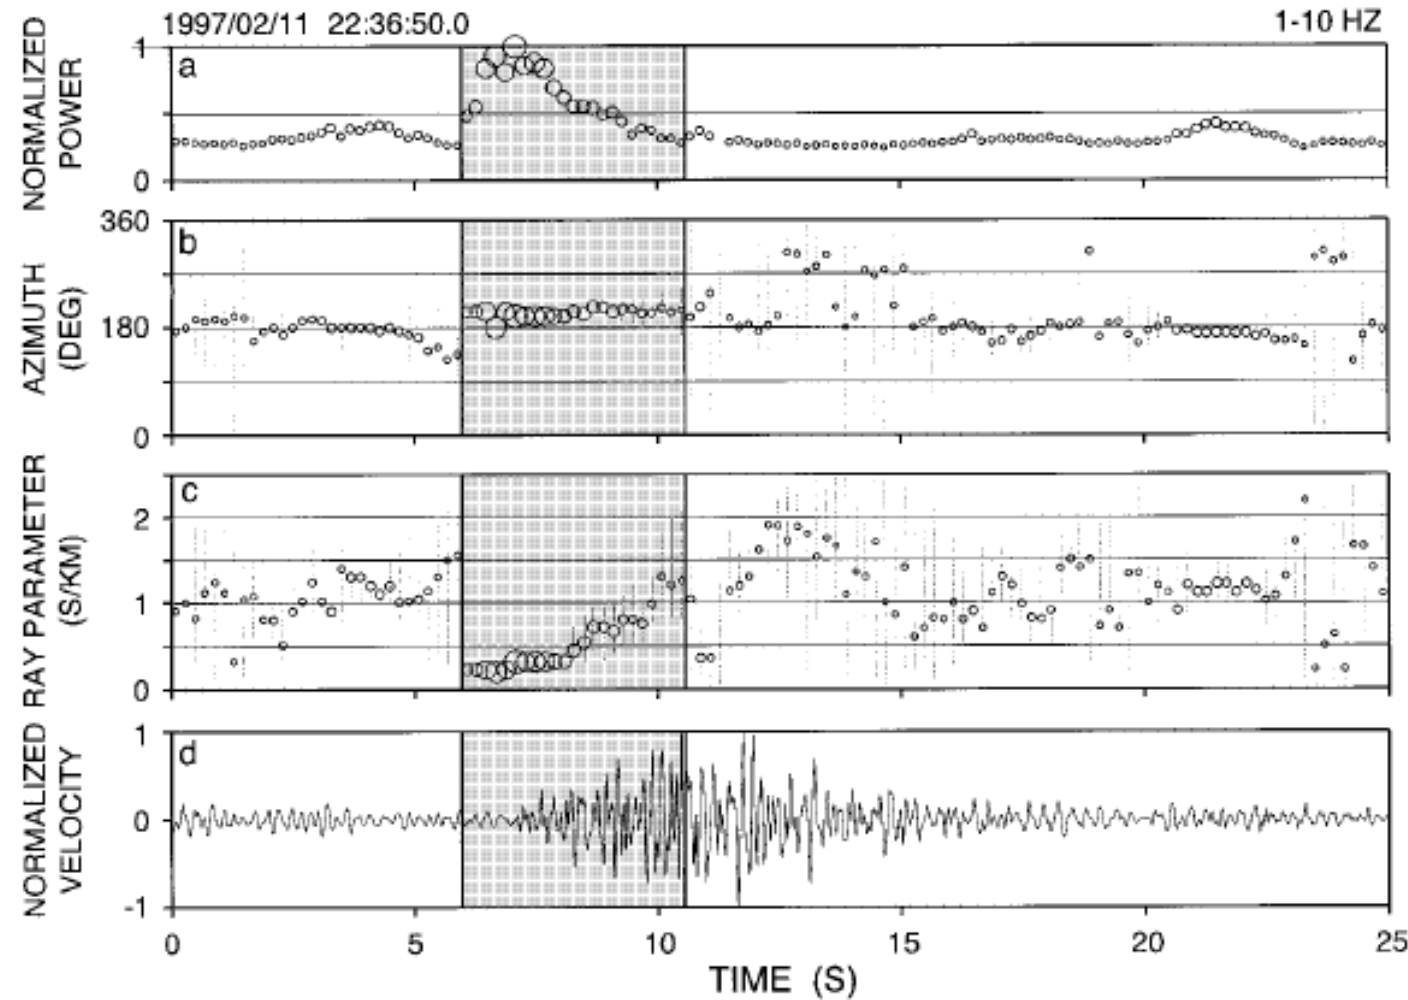

Another methods to better estimate of source region- by modeling the wavefield in the 3-D velocity structure and 3-D topography.

The back-azimuth method gives us the rough estimate of source region, but to have much precise estimate we use modeling method.

We used here spatio-temporal data received from sensors of previously discussed Kilauea caldera and do two types of modeling - (1) 3-D topography and (2) 3-D velocity structure.

3-D topography modeling
- assumes homogenous medium - gives details about how topography affects wave propagation

3-D velocity structure-
assumes heterogeneous medium - gives more precise estimate than topography method.

3-D topography modeling

➤ This waves displacement also helps us to understand effects of topography on wave propagation.


➤ Here the medium is assumed to be homogenous and changes in velocity is not taken into account.

➤ The red anomaly in 0.5s is the diffraction of waves by halemaumau pit crater.

➤ Diffraction anomaly is also seen in 0.9s .

➤ Waves backscattered from cliffs marking the northwest caldera boundary appear as a linear band of orange oriented parallel to the topographic contours north of Halemaumau at $t \frac{1}{4}$ 1.2 s.

This figure represents the vertical component of ground displacement. The origin of the waves is the seismic source location (marked as white circle in the figure).

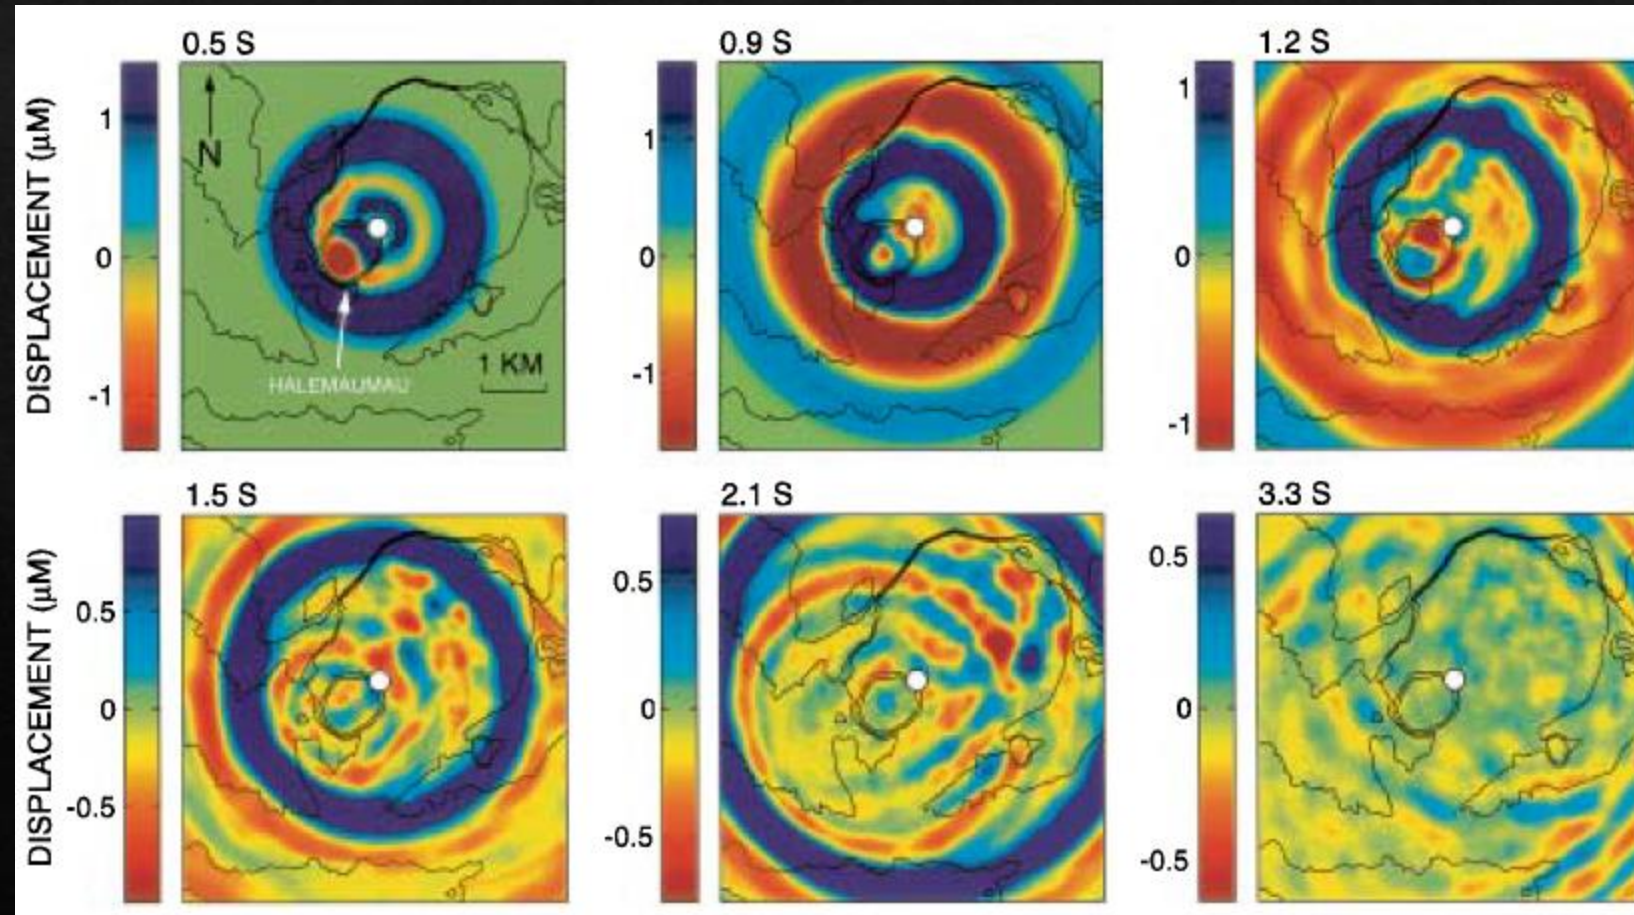


3-D modeling of velocity structure- give better estimate of source location.

Heterogeneous medium is taken. Changes in velocity of wave as it propagates is taken in account in this modeling.

Slowness vector is different in both cases-

- White arrow- topography only
- Black arrow- both topography and velocity structure

This difference in slowness vector shows us that it is mandatory to consider both factors, topography and velocity structure, to obtain precise results for source location estimates.

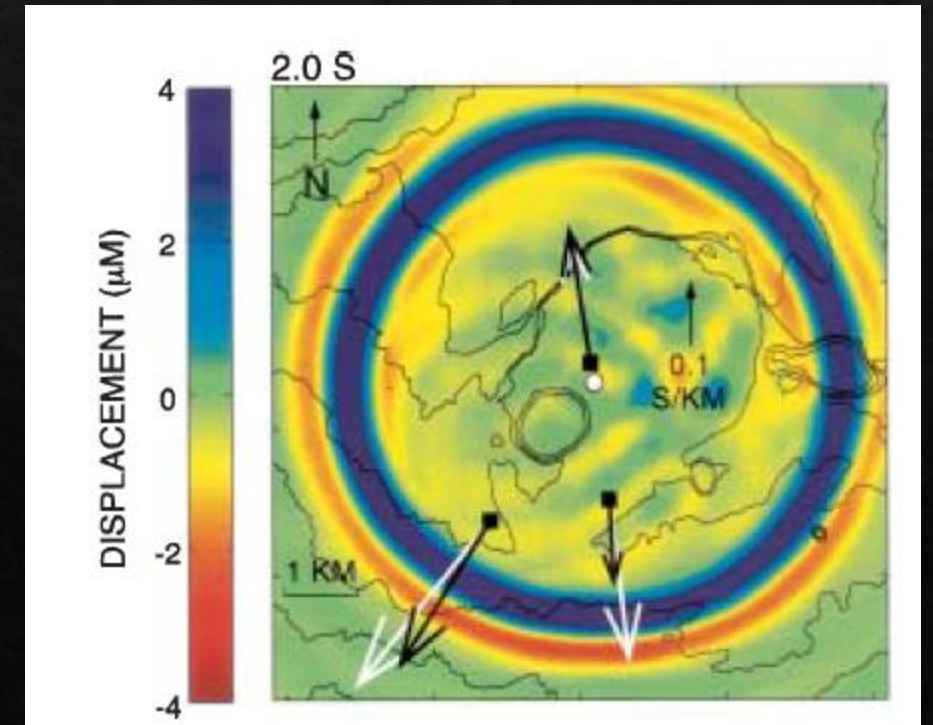

Locating the magma beneath volcano

- Here we image 3-D velocity structure of volcanic edifice by tomographic inversion of P-wave and S-wave arrival times.


- A low velocity anomaly in P-wave is seen beneath Kilauea.

- V_p/V_s ratio has anomaly at same region as the low P-wave anomaly, but it has two separate regions.

- Same region shows a decrease in P-wave velocity, but simultaneously the V_p/V_s ratio increased in anomaly, showing that shear wave velocity has greater decrement.

- And we know that S-wave velocity decreases drastically in liquid medium (in lava).

Map views of the P-wave velocity (a-d) and V_p/V_s ratio (e-h) models at four depths. Black lines indicate ring fractures, faults, and pit crater in Kilauea.

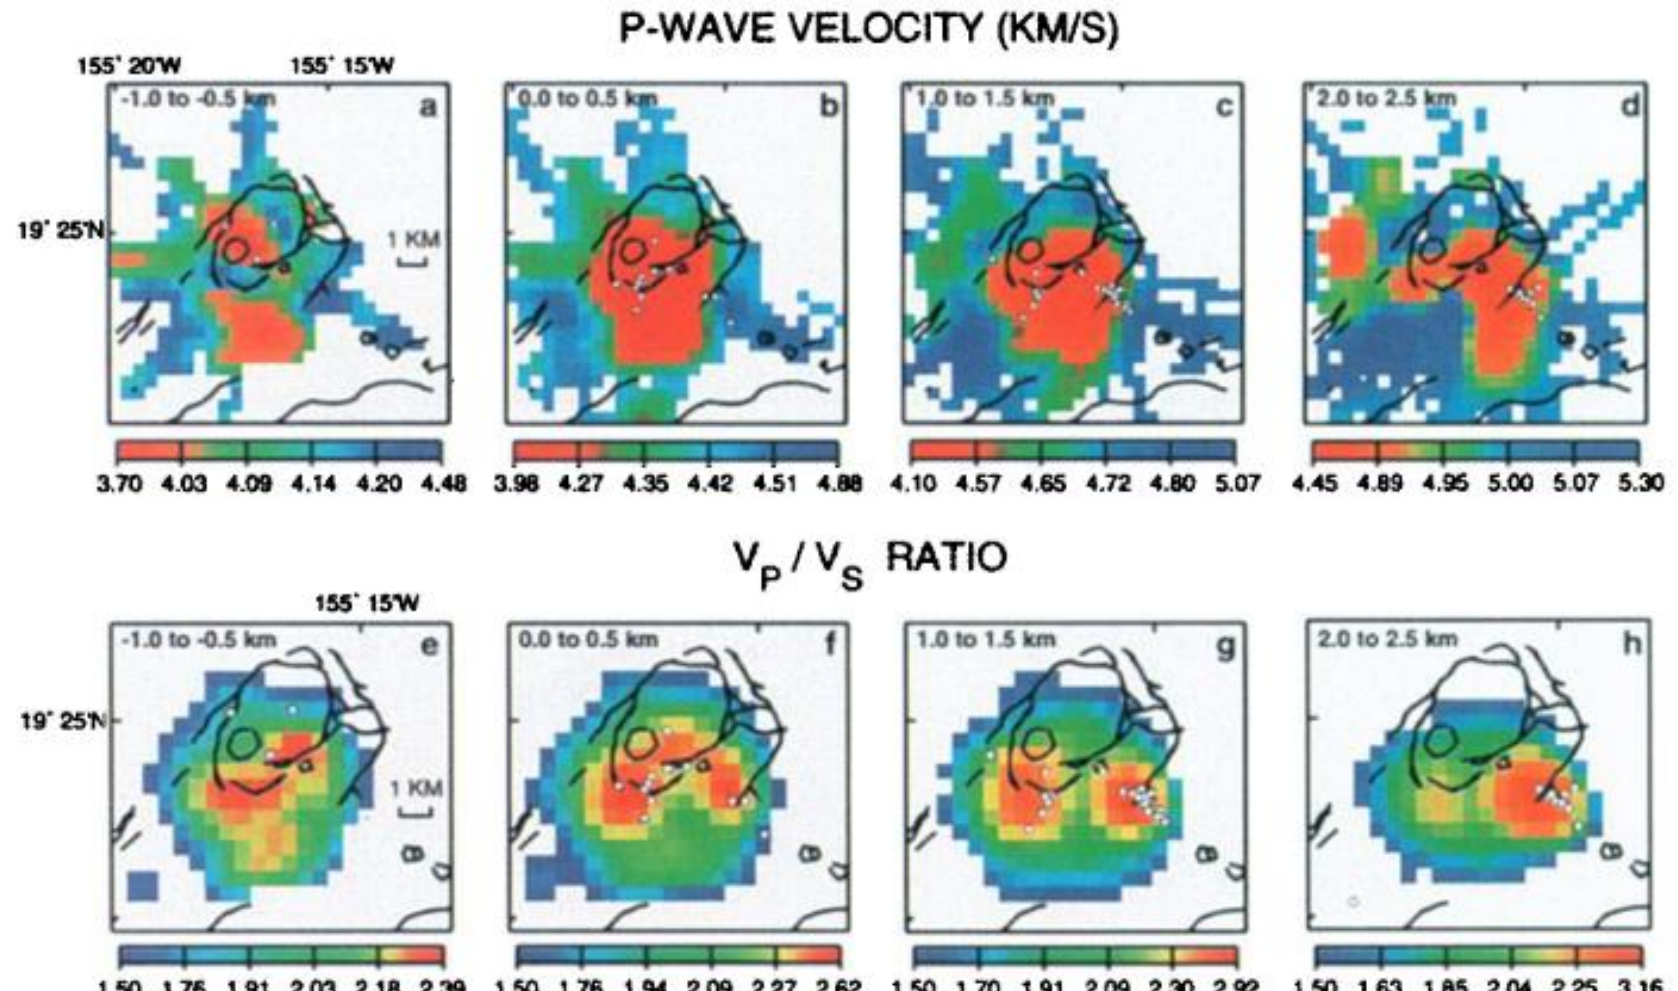

Vp/Vs ratio in HR tomography of volcano

Recall- velocity of shear wave is nearly zero in liquid medium.

- We prepare Vp/Vs model by using travel time inversion data.
- Studying that model we try to identify the position of magma source.
- The sudden increase in Vp/Vs ratio hints of the presence of magma.
- Anomalies observed in Vp or sudden decrease in Vs can also tell us about the presence of magma.

Only the details of Velocity of S or P wave can also provide the hint of presence of magma, then what are the advantages of using Vp/Vs ratio?

- Calculating Vp/Vs ratio is easier than calculating Vp and Vs separately, as we won't need to know the density of every point in magma.
- Moreover, Vp/Vs ratio can be used to predict rock type.


$$v_P = \sqrt{\frac{\lambda + 2\mu}{\rho}}$$

$$v_S = \sqrt{\frac{\mu}{\rho}}$$

Magma migration to earth surface


- When magma rises from its storage zone, it begins to move along system of tectonic fracture and volcanic conduit in the form of dyke or sill.
- Some magma rises directly straight upwards in dykes, in some volcanic systems magma flow into horizontal sills, while in some cases it rides upward at some angle and forms flank crater on surface.

What property or what factor determines the pathway of magma?

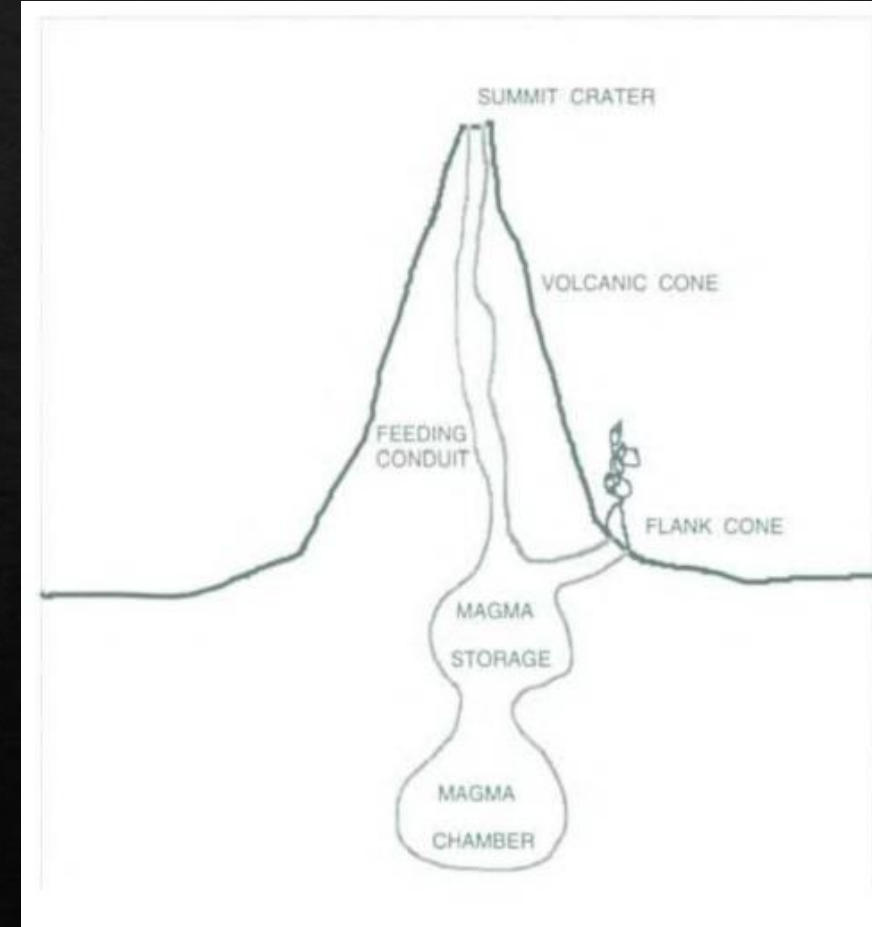

VISCOSITY – viscosity of magma determines the pathway of magma up to the surface.

- Less viscous magma (basaltic magma)- prefer to go along with faults and their strike.
- Intermediate viscosity (andesitic-basaltic)- may prefer to go along with faults and their strike or it may cut through them.
- High viscosity magma (dacitic)- slowly cut the stratified structure and form obelisks.

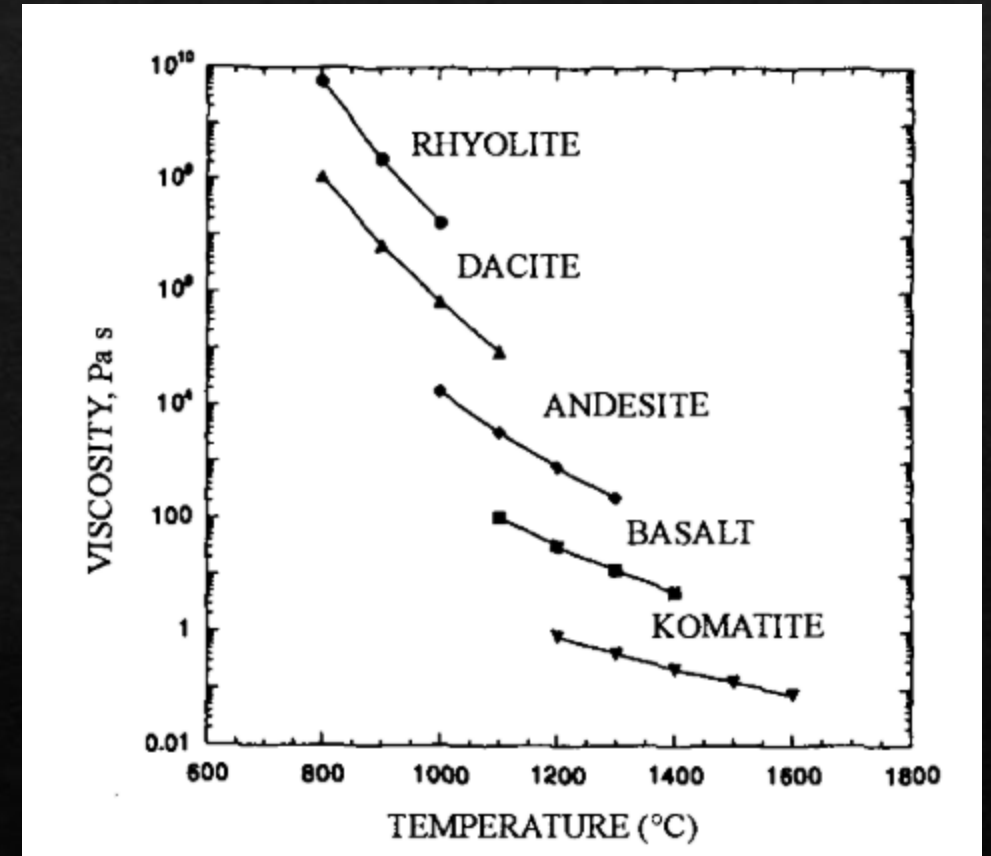

3 Types of volcano and their seismic data

Depending on type of lava, we have 3 types of volcanic eruptions-

1. Pelean - dacitic and andesitic lava- (HIGH) central eruption, pyroclastic flow, lava dome
2. Strombolian - andesitic basaltic lava- (INTERMEDIATE)- strong eruption without pyroclastic flow, lava flow, dark eruption clouds
3. Hawaiian – basaltic lava- (LOW)- central, fissure and flank eruptions, lava flow.


Volcanic eruptions are characterized by earthquake swarms rather than one single major event. The general properties (spatial or temporal distributions) of these swarms helps us in differentiating volcanoes. Though not all but most of the volcanoes of similar viscosity follow a particular trend in seismic events.

On observing all patterns of temporal distributions of many volcanoes, temporal distribution was classified into three types-

Type I – One peak [Very Rare]

Type II – Multipeak with highest peak at the start of events [Found mainly in Basaltic and Dacitic]


Type III – Multipeak with highest peak at the end of sequence [Found mainly in Andesitic and sometimes in Dacitic]

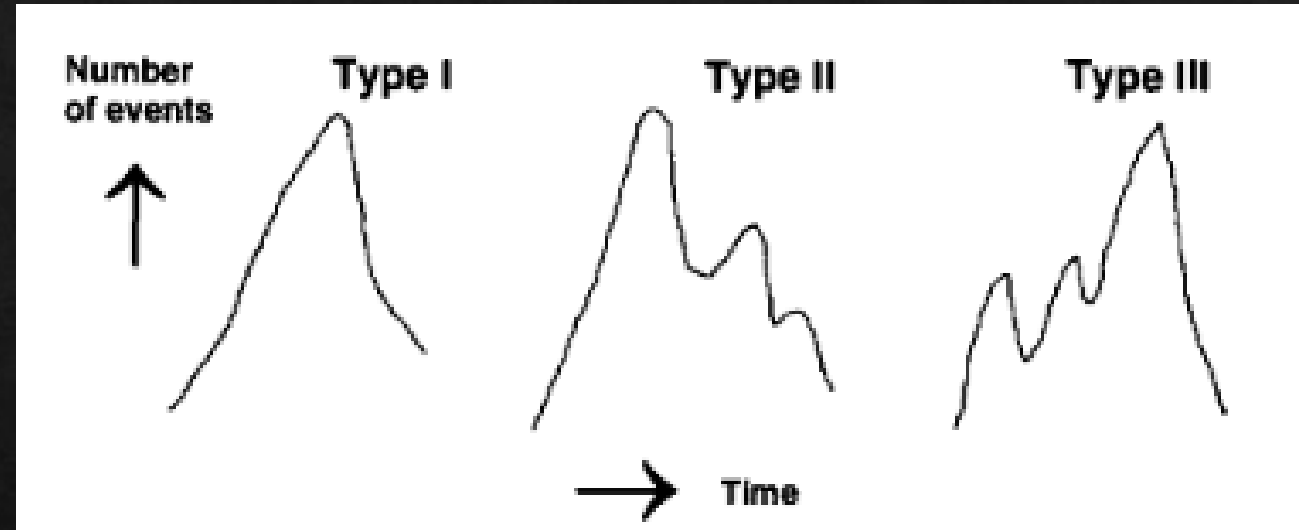

- ❑ For basaltic volcano majority of eruptions occur after the end of seismic sequence,
- ❑ For andesitic and Dacitic volcano majority of eruptions occur during the maximum number of volcano-tectonic earthquake.


What do you think is the possible reason for these multi-peaks?

Multi-peak temporal variation in seismic events is the result of migration of seismic foci (or seismic clusters). As just before eruption seismic activities begin to concentrate at shallower depths.

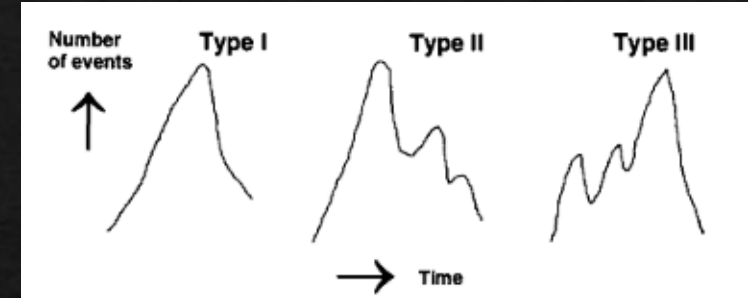


➤ We will see a few examples of temporal distribution of earthquake swarms, i.e. , no of events vs time graphs of a few volcanic eruptions.

Temporal distribution of events for Basaltic magma (Low viscosity)

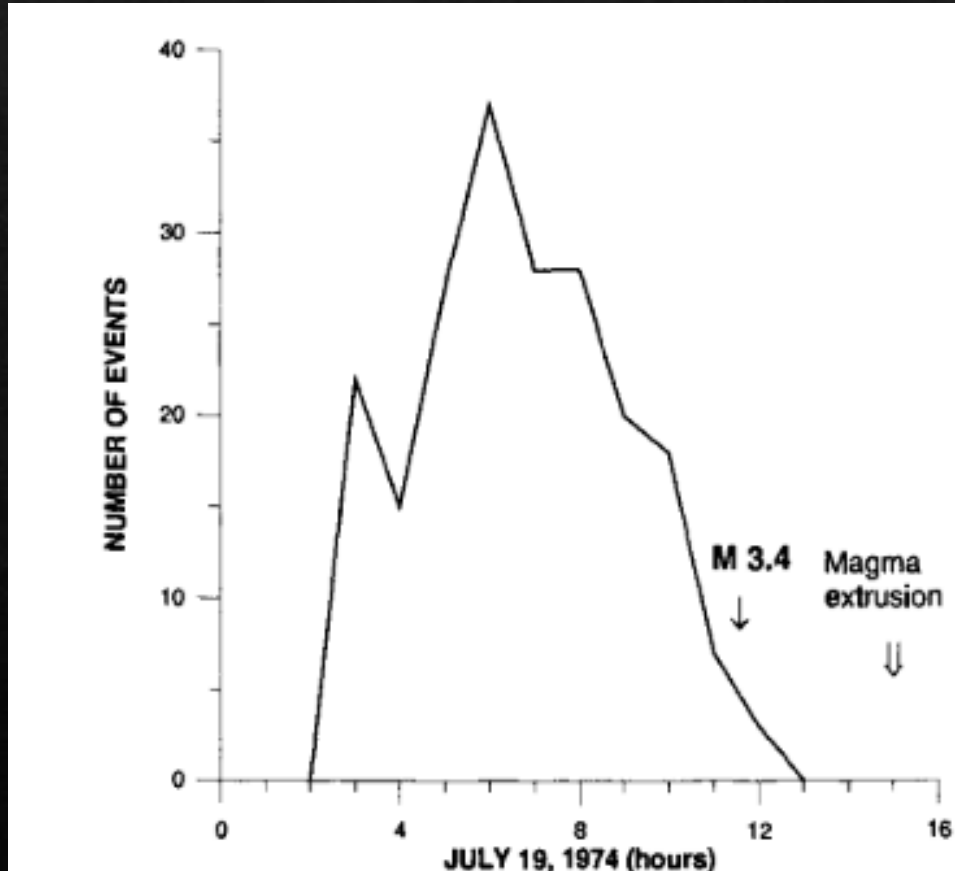


Kilauea volcano

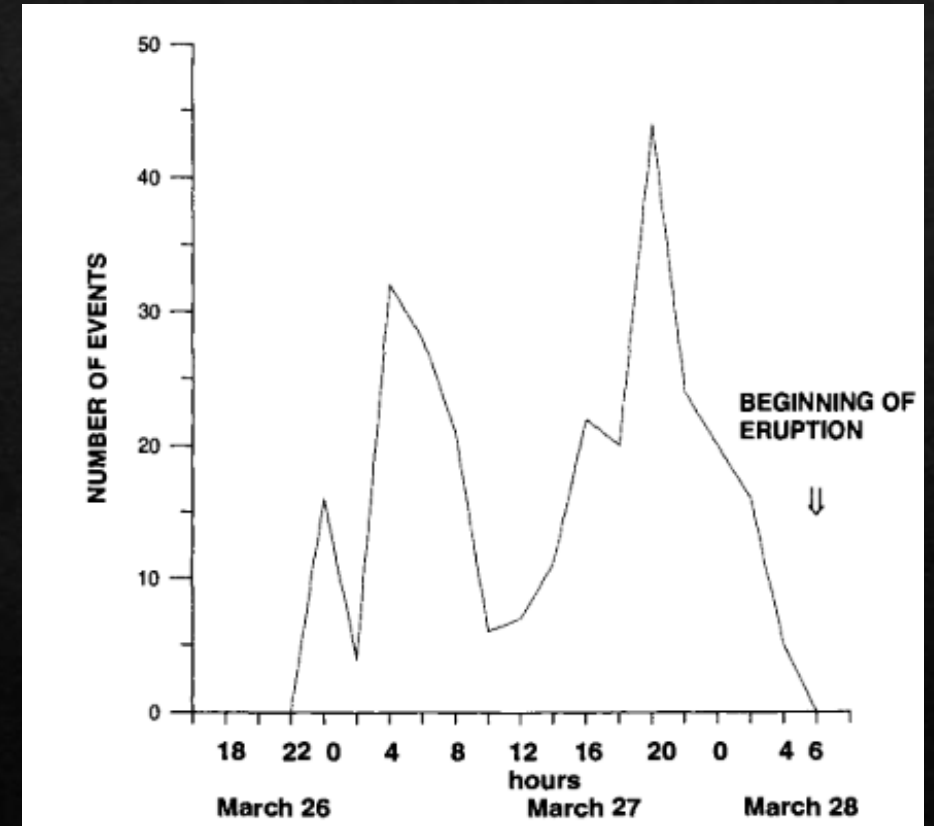


Mt. Etna , Sicily

Temporal distribution of events for Andesitic magma (Intermediate viscosity)

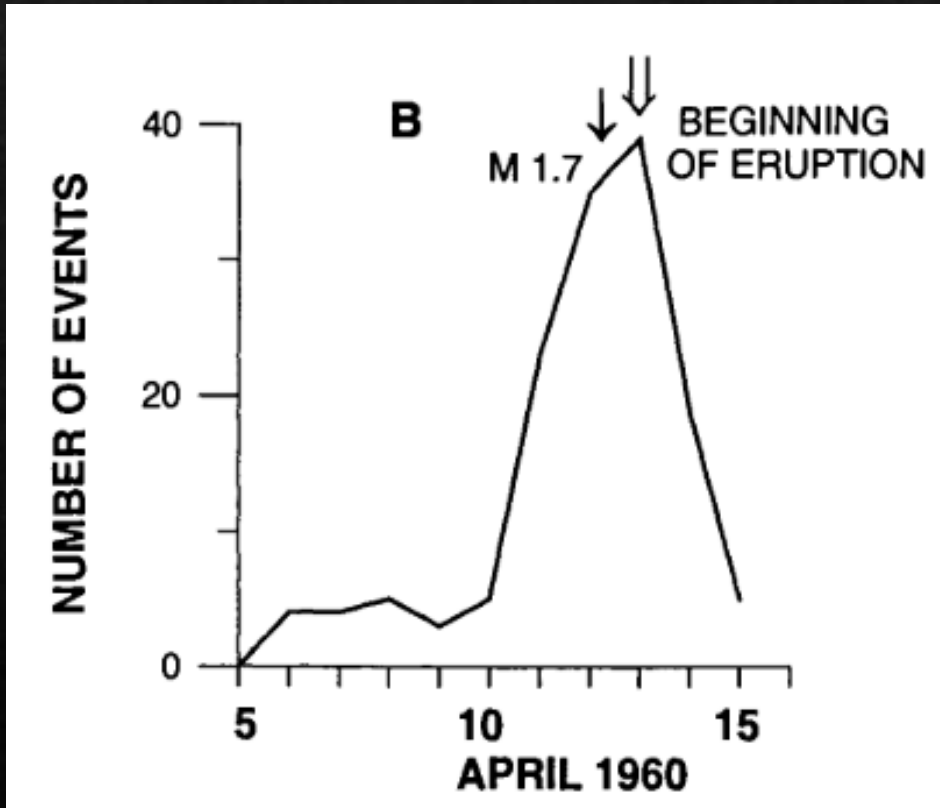


Bezymianny Volcano, Russia

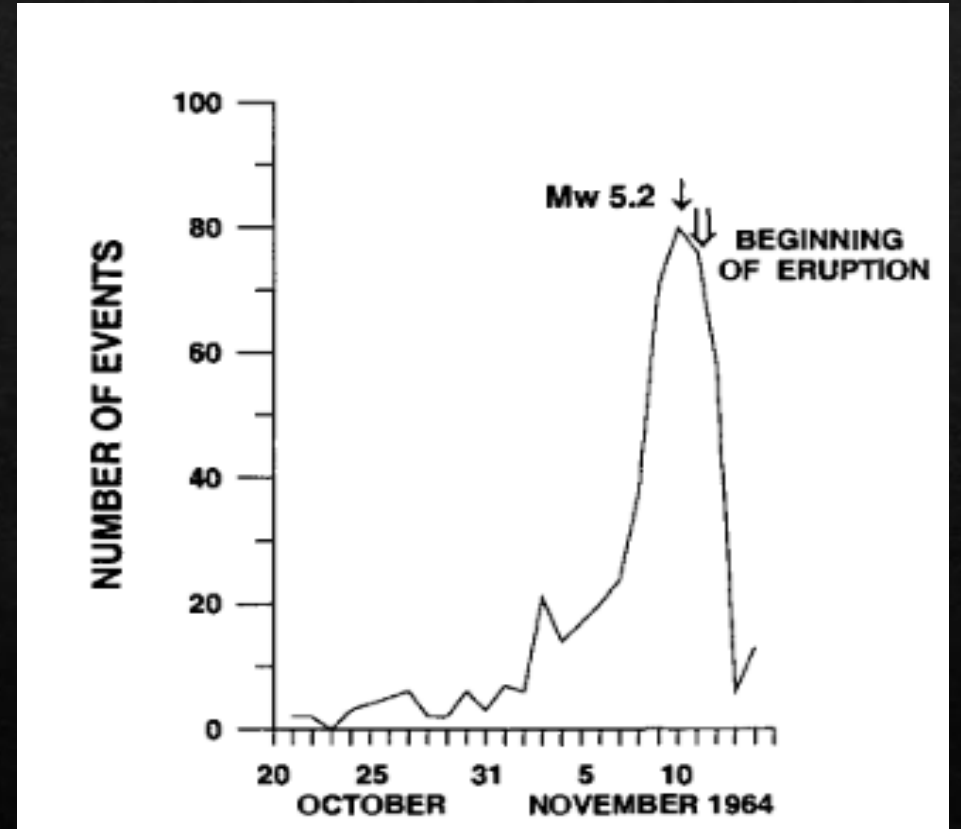


Sheveluch Volcano, Russia

Temporal distribution of events for Dacitic magma (HIGH VISCOSITY)

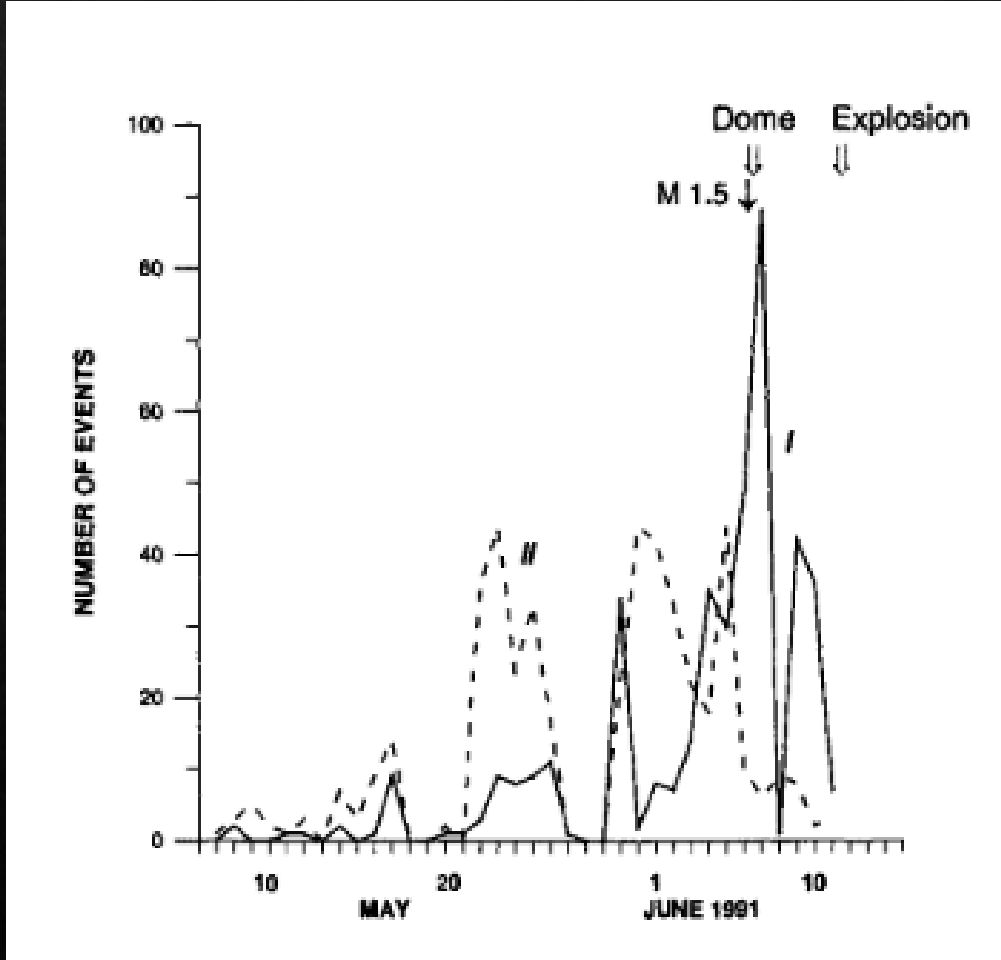

Usu volcano, Hokkaido

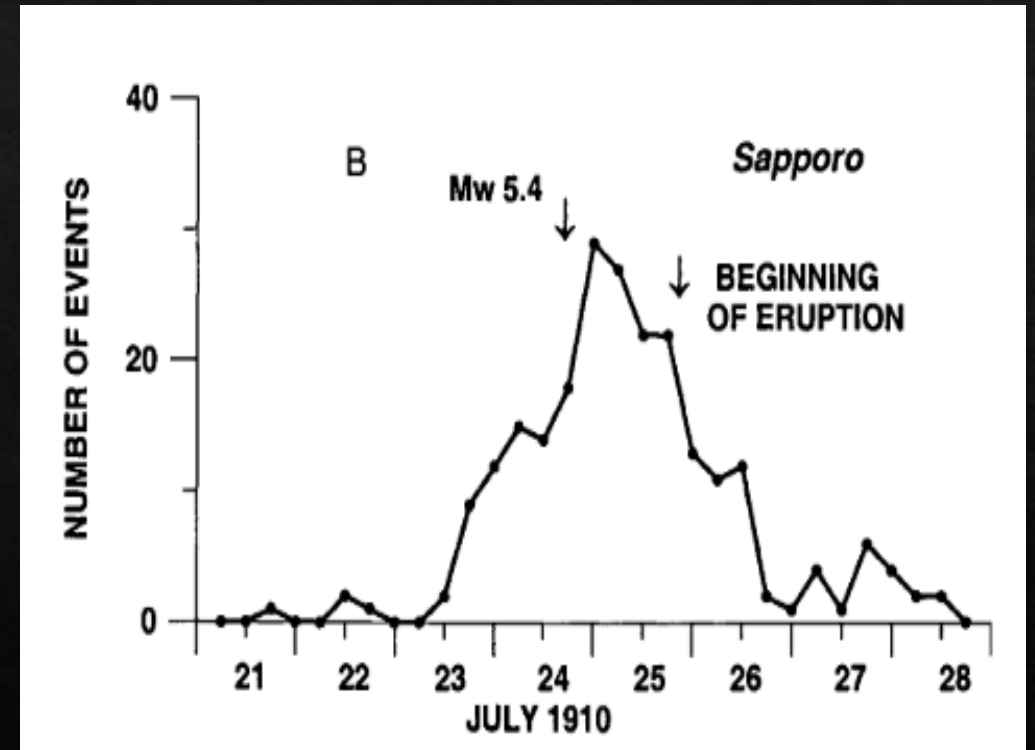

Pinatubo volcano

Identifying viscosity changes before eruption

- We know that magma viscosity determines type of eruption. Most of volcanoes have been already classified according to their viscosity. But sometimes viscosity may be different from previous eruptions during a particular eruption.
- Now if we could identify if there is going to be some change in predetermined viscosity type then it could be of great use in predicting eruption hazards and warning people ahead to evacuate places nearby volcano.

May 2018 rift intrusion and eruption of Kilauea Volcano, Hawaii displayed exceptional chemical and thermal variability in erupted lavas, leading to unpredictable effusion rates and explosivity. But monitoring its fault plane solution (FPS) we could pre-estimate the chances of more viscous eruption than it used to be.

- Fault plane solution or FPS- indicate a fault's orientation and sense of movement.

The key idea is – rotation of FPS by 90 degree indicates the presence of high viscous magma.


As it was observed in lower east rift zone (LERZ) that FPS rotated by 90 degree (the red peach balls show rotated FPS), it was predicted that viscosity of magma beneath is high in contrast to it being low (basaltic) usually.

From where does this high viscous magma came?

Some of the magma was stagnant beneath PuuOo vent . Overtime this magma partially crystallized and formed a semi-rigid barrier that impeded further transport downrift.


In May 2018, the increase in summit magma pressure increased the pressure beneath the PuuOo vent to which caused failure of the semi-rigid magma barrier.

This triggered the downrift transport of magma through a system that contained stagnant pocket of higher viscous magma.

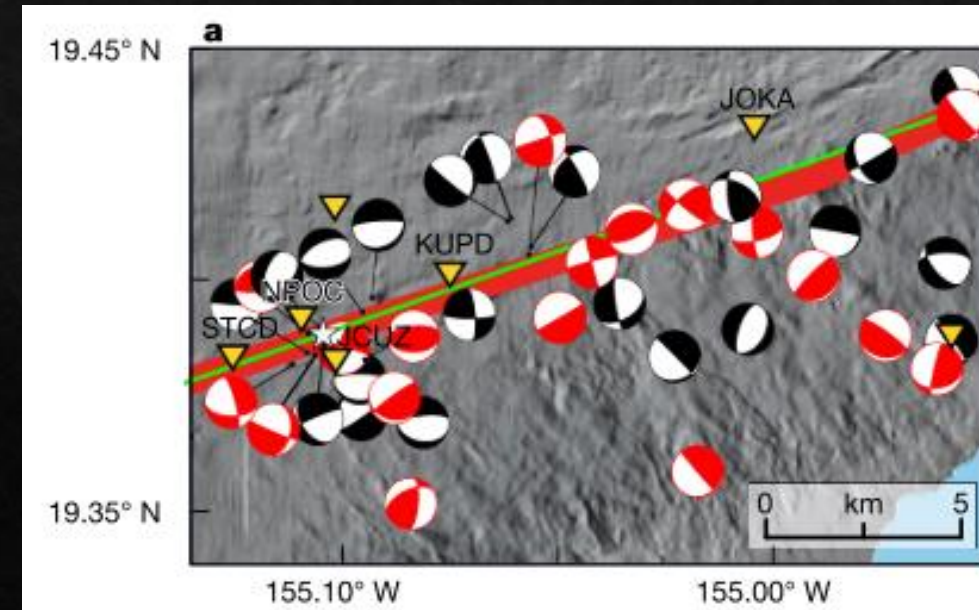

Lower east rift zone

Viscosity threshold for FPS rotation

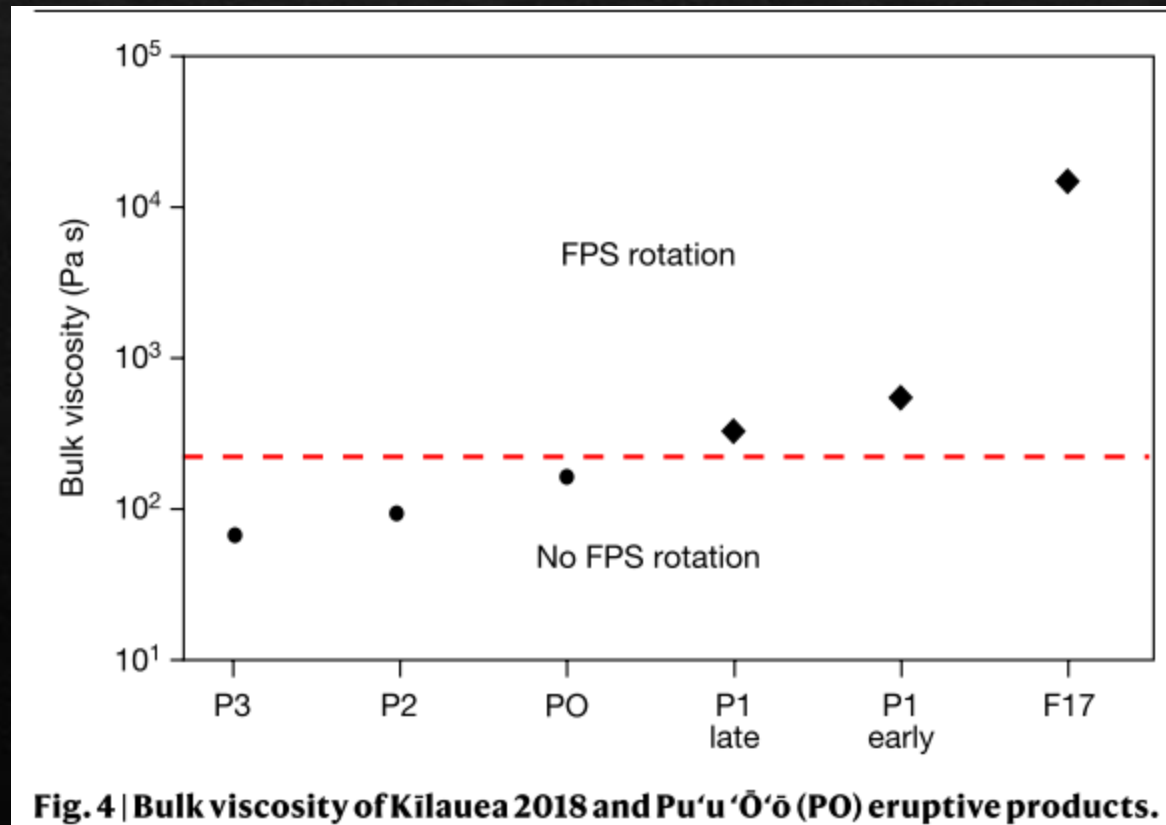

Lower-viscosity ($< \sim 10^2$ Pa s) magmas are not associated with periods of FPS rotation (circles), whereas higher-viscosity ($> \sim 10^2.5$ Pa s) magmas are associated with periods of FPS rotation (diamonds). The red dashed line indicates the threshold bulk viscosity for FPS rotation.

How is high viscosity doing this?
For FPS rotation, is it just fault rotating in real or it can rotate by stress field rotation only?

- Rotations of the axis of local maximum compression (FPS P-axis orientations) by approximately 90° have been observed in double-couple FPS for volcano-tectonic earthquakes prior to and during eruptions and have been *linked to stresses produced in the walls of an inflating or pressurizing dike*.
- Such stress-field rotations of around 90° have been documented only in cases where the erupted magma is highly and/or partially crystalline and thus may reflect that *the stress is normal to the flow direction during magma emplacement*.
- *Dynamic normal stresses may result from a volume increase during flow of highly crystalline* magma under a velocity gradient, via a nonlinear process known as shear dilatancy.
- Therefore, comparison of local stress-field response at a single volcano between episodes of low- and high-viscosity magma transport is necessary to prove the hypothesized link between magma viscosity and stress-field rotation.


Case- Usu Volcano, Hokkaido, 1977-1978 eruptions

- It's a dacitic volcano.
- It has characteristic distribution of its central and flank cones that outlines a system of circular cracks.
- There is a chain of dacitic cones around 200m contour line of volcanic edifice.

These surface features shows the movement of dacitic magma along the circular faults.

In this geometry where could we possibly locate the earthquakes happening during to eruption?

Contour with dots - cryptodomes
Thick contour - lava domes

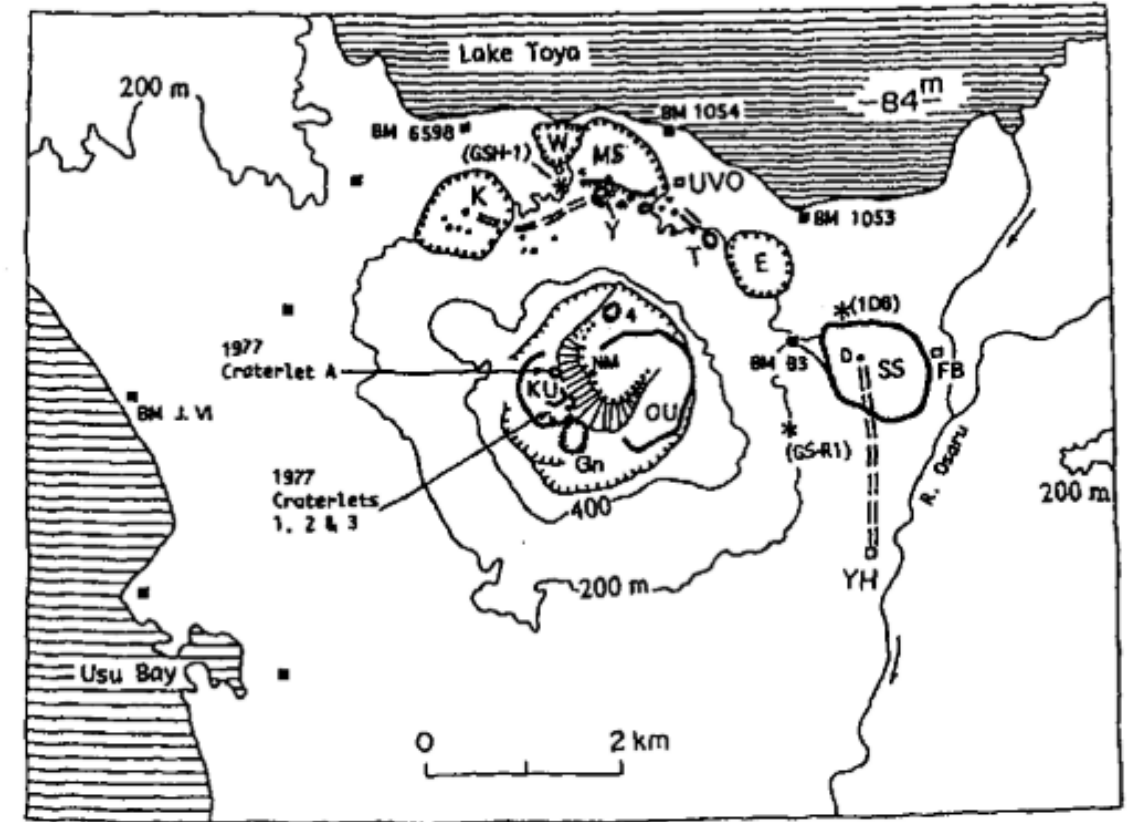


. A system of cones that formed at Usu volcano, Hokkaido,

Distribution of earthquake epicenters also helps us in understanding geology below volcanic edifice

- The earthquake epicenters when located formed a circular cluster around its caldera.

- The earthquakes surround an event free zone beneath the central part of the submit.
- It indicates the deep circular fault distribution.
- Thus the magma movement causes tremors, on locating whose centers we can study the geology of that volcanic edifice.

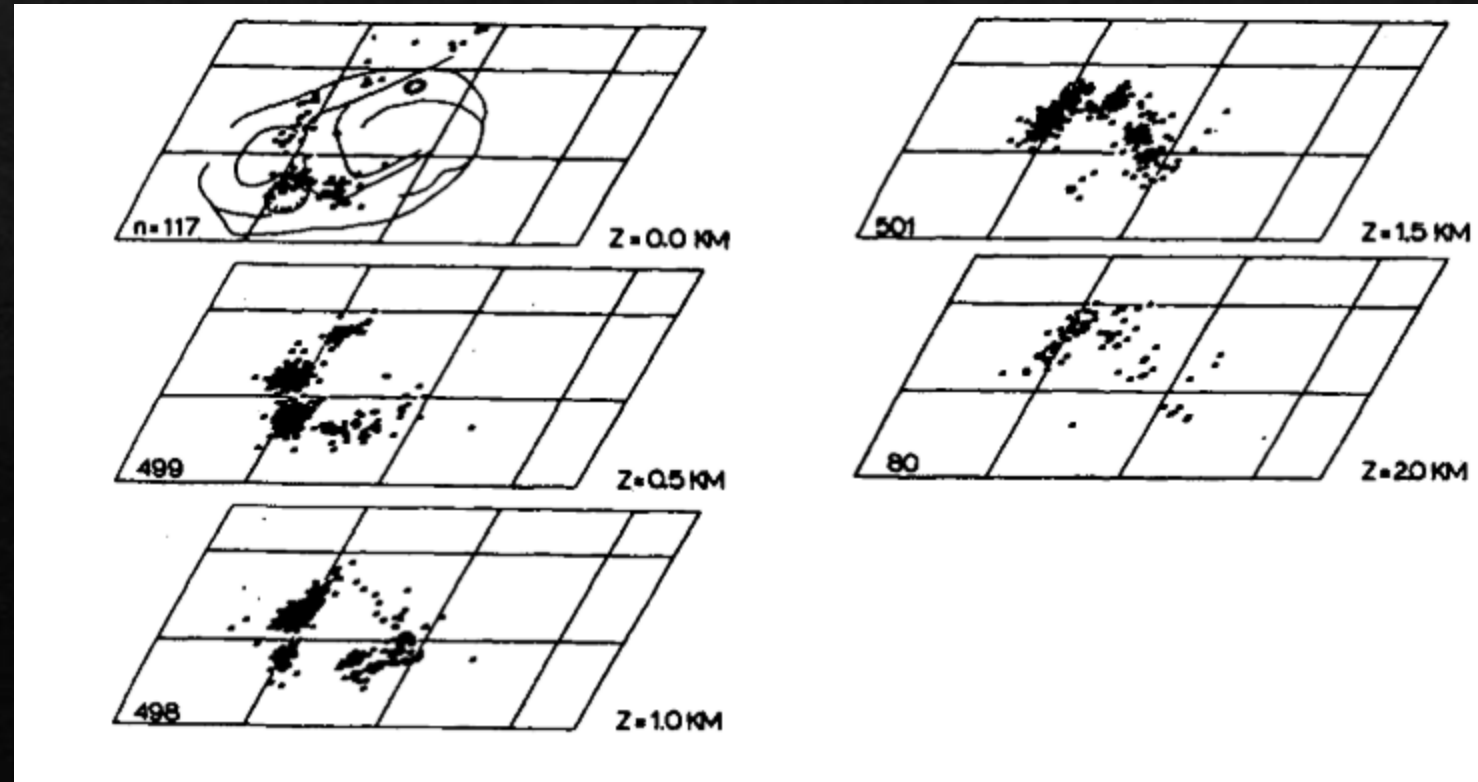


Magma Pathway Geometry

□ We have seen that viscosity is the pathway deciding factor, now we are going to see the geometry of the magma pathway.

To understand geometry we study the crack containing magma.

□ We use a basic procedure- we do moment tensor inversion from VLP data and check for the presence of single force components and then analyze it.

Understanding it by an example of- A broadband record obtained at Kilauea on February 1, 1996

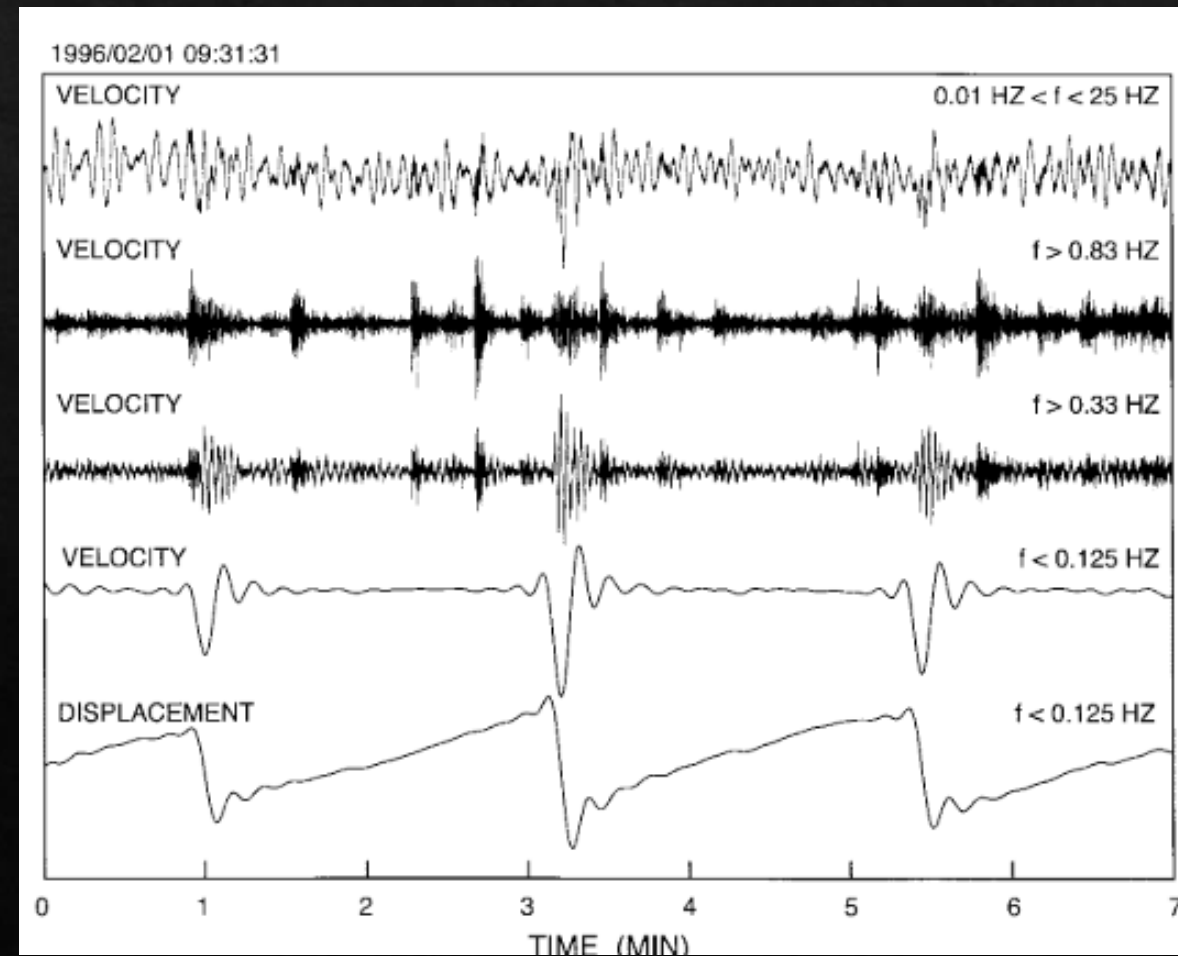


In the moment tensor inversion data shown here, we can see that volumetric components (M_{xx} , M_{yy} , M_{zz}) dominates – which means that crack undergoes compressional forces rather than shear stresses.

We see that a single force is also present, this is vertical single force.

What do you think could be the possible reason for this vertical single force?


Vertical single forces may be present due to
-release of gravitational energy in the source volume
OR
-recoil force generated by a volcanic jet during an eruption OR
-viscous drag applied by rising magma.

In this given Kilauea volcano, viscous drag was found out to be the main reason for this vertical single force.

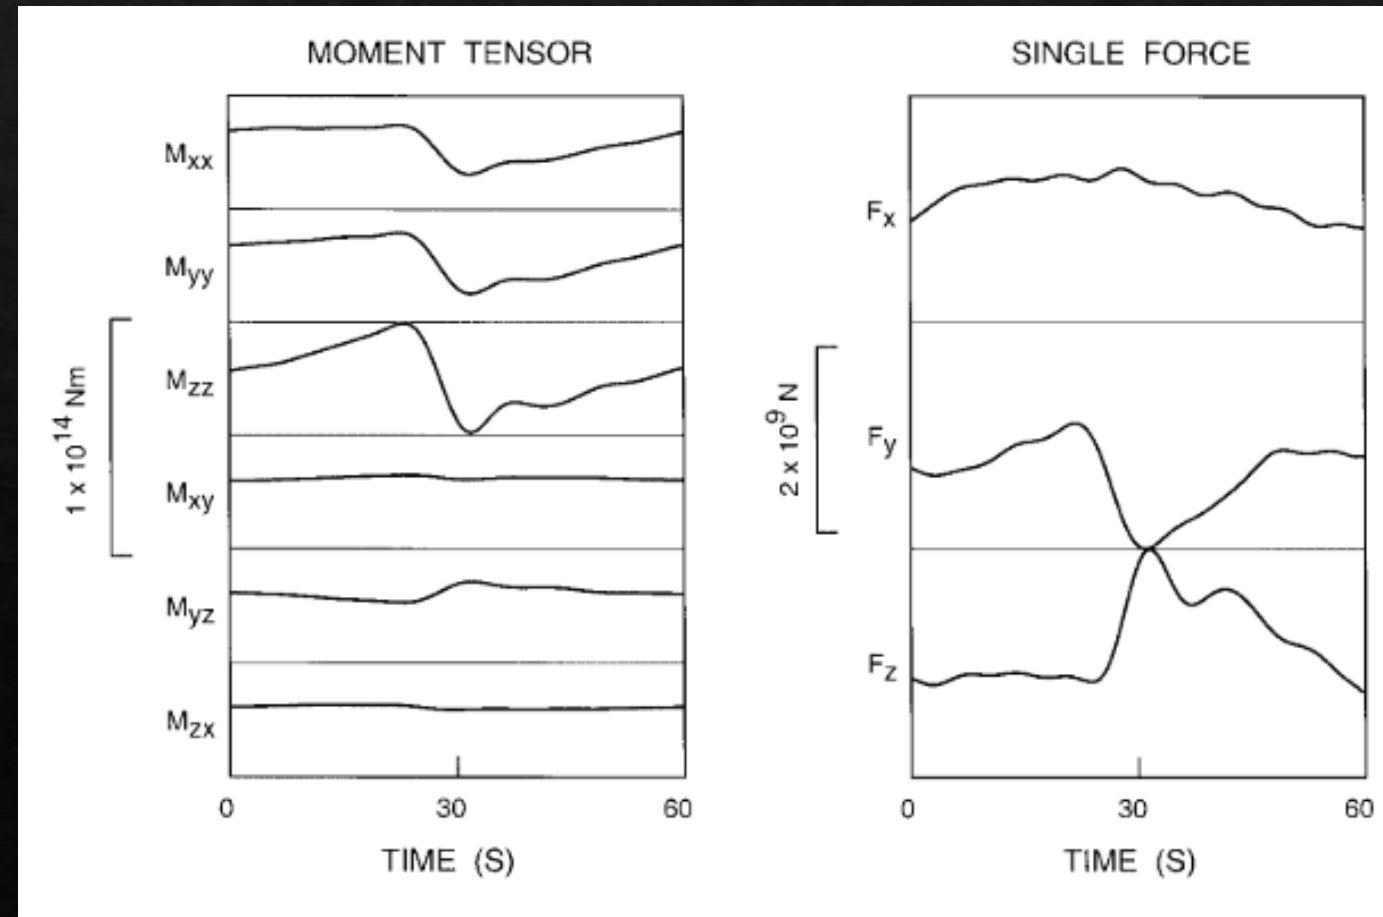

- In the inversion results, the force is synchronous with the compression of the crack, consistent with a discharge of fluid from the crack.

The origin of this force is the drag force generated by the flow of viscous magma through a narrow constriction in the flow path.

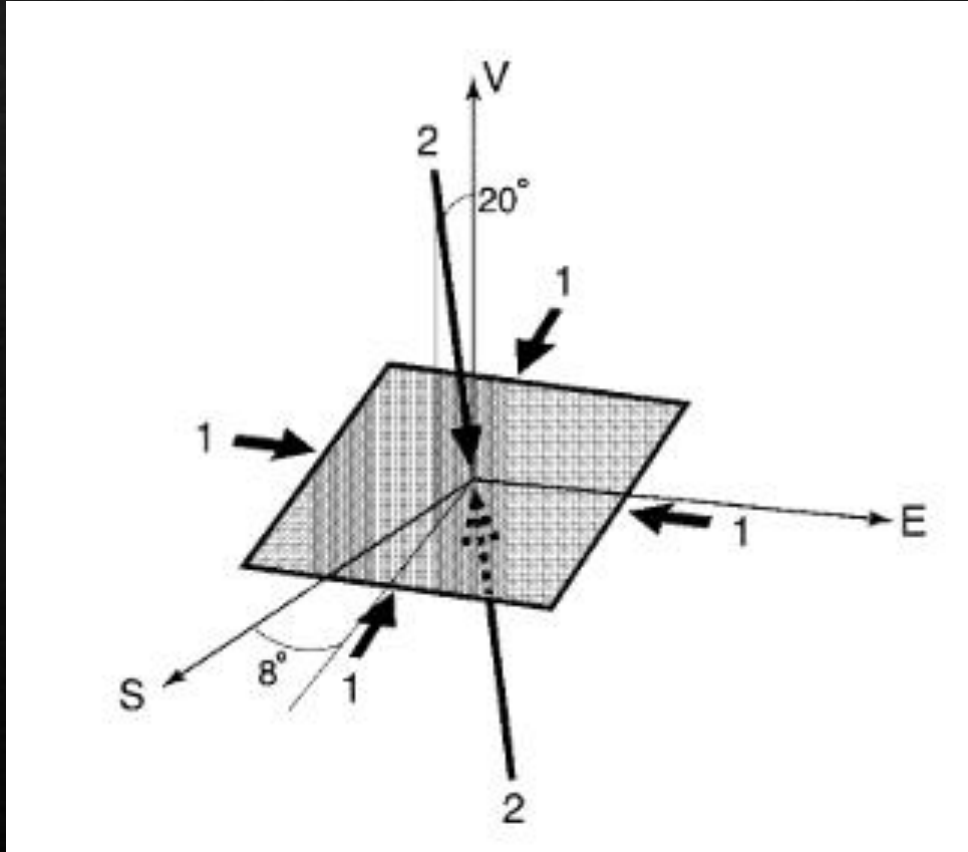

Source model obtained from inversion of VLP data at Kilauea. The amplitude ratios for the three axes of the moment tensor are 1:1:2.

So, in this mechanism we see that as crack compresses, magma is injected from crack to the conduit and rising magma apply viscous drag on crack in vertical direction.

References

- ◆ Zobin, Vyacheslav. (2019). Volcano Seismology: An Introduction. 10.1007/978-3-642-27737-5_607-2.
- ◆ Source mechanism of volcanic tremor: fluid-driven crack models and their application to the 1963 Kilauea eruption, Keiiti Aki, Mike Fehler and Shamita Das, Department of earth and planetary sciences, Massachusetts Institute of Technology, Cambridge, mass. 02139 (U.S.A.)
- ◆ Volcano Seismology, B Chouet, Pure and applied geophysics 160, 739-788
- ◆ Dawson, Phillip & Chouet, B. & Okubo, Paul & Villasenor, Antonio & Benz, H.. (1999). Three-dimensional velocity structure of the Kilauea Caldera, Hawaii. Geophysical Research Letters. 26. 2805-2808. 10.1029/1999GL005379.
- ◆ Roman, Diana & Cashman, Katharine. (2006). The origin of volcano-tectonic earthquake swarms. Geology. 34. 10.1130/G22269.1.

These slides are only for educational purpose and all the content in them are taken from some research papers or books.
This literature review was done as a part of internship and I had tried to provide credits of all text and images in references.