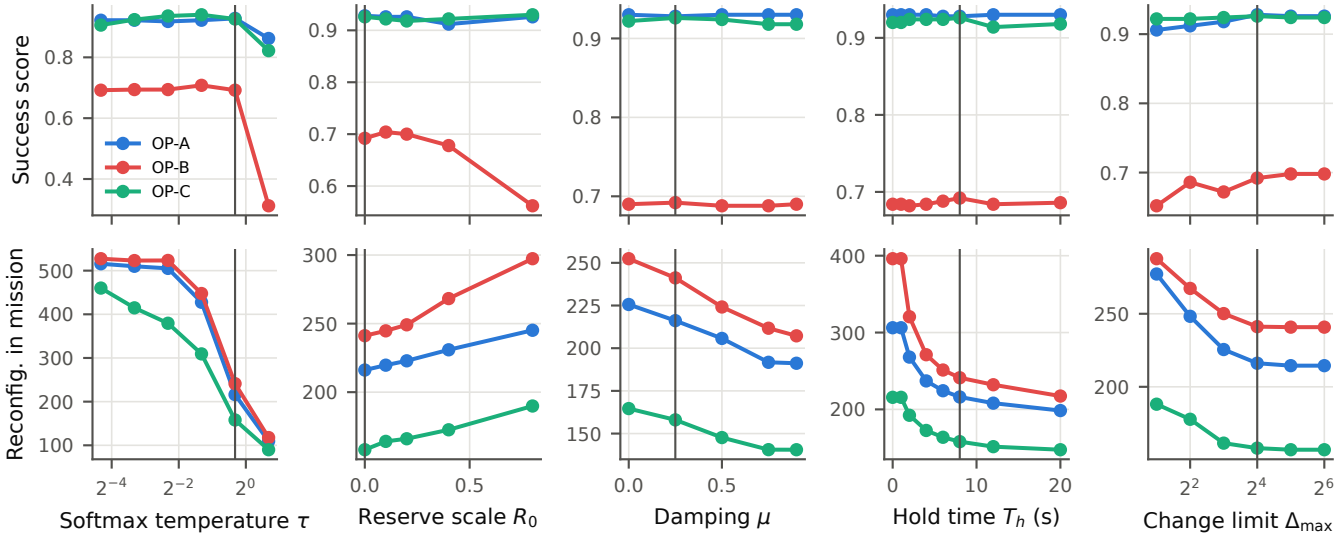
Success score
Reconfig. in mission
OP-A
OP-B
OP-C
Softmax temperature τ
Reserve scale R_0
Damping μ
Hold time T_h (s)
Change limit $\Delta_{\max}$