THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF ALTIUM LIMITED AND MAY BE FREELY DISTRIBUTED IN WHOLE. NO RIGHTS ARE RESERVED OR EXPRESS OR IMPLIED WARANTEE GIVEN.

Power

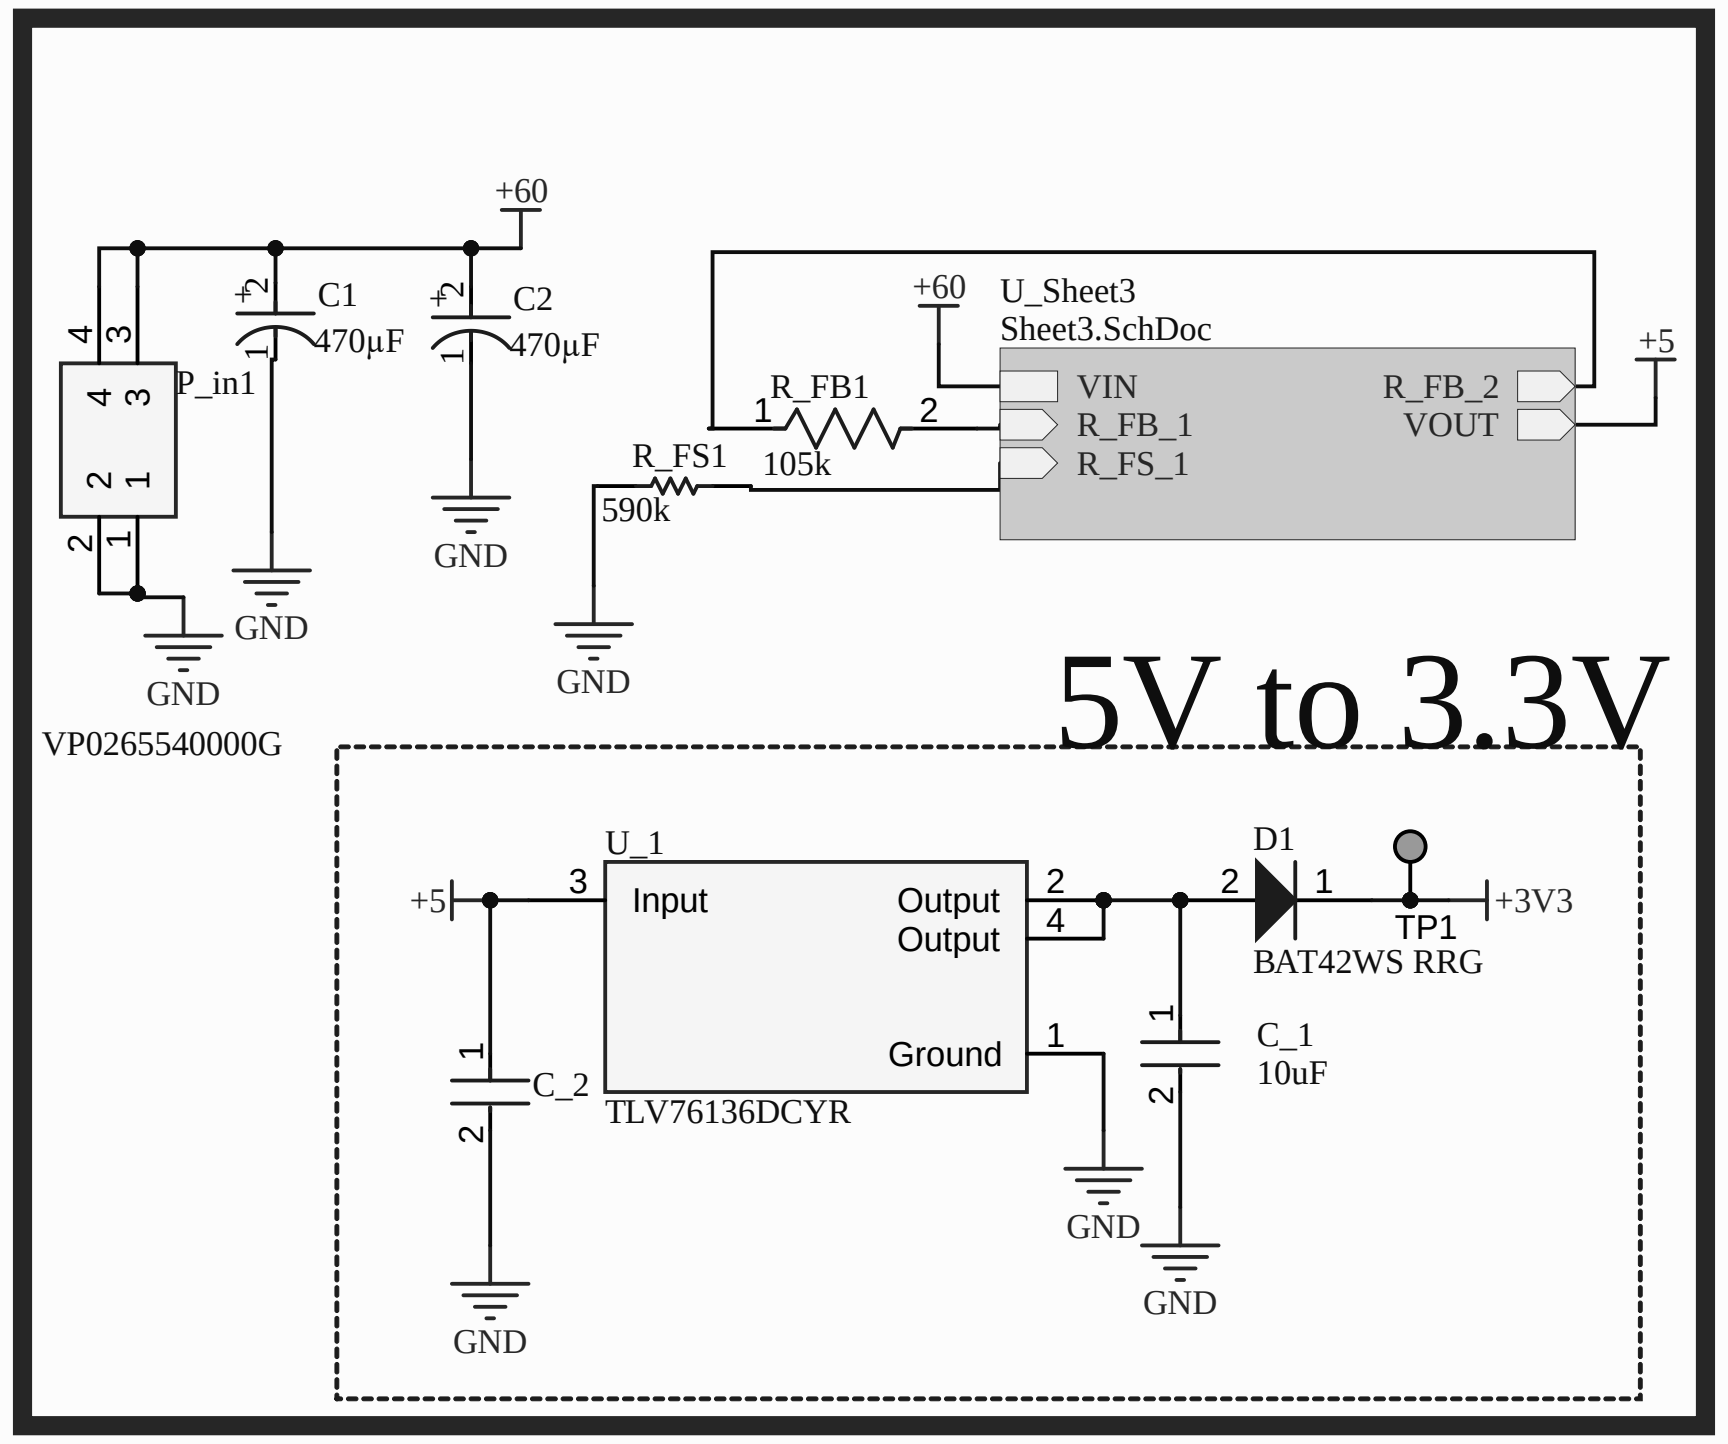

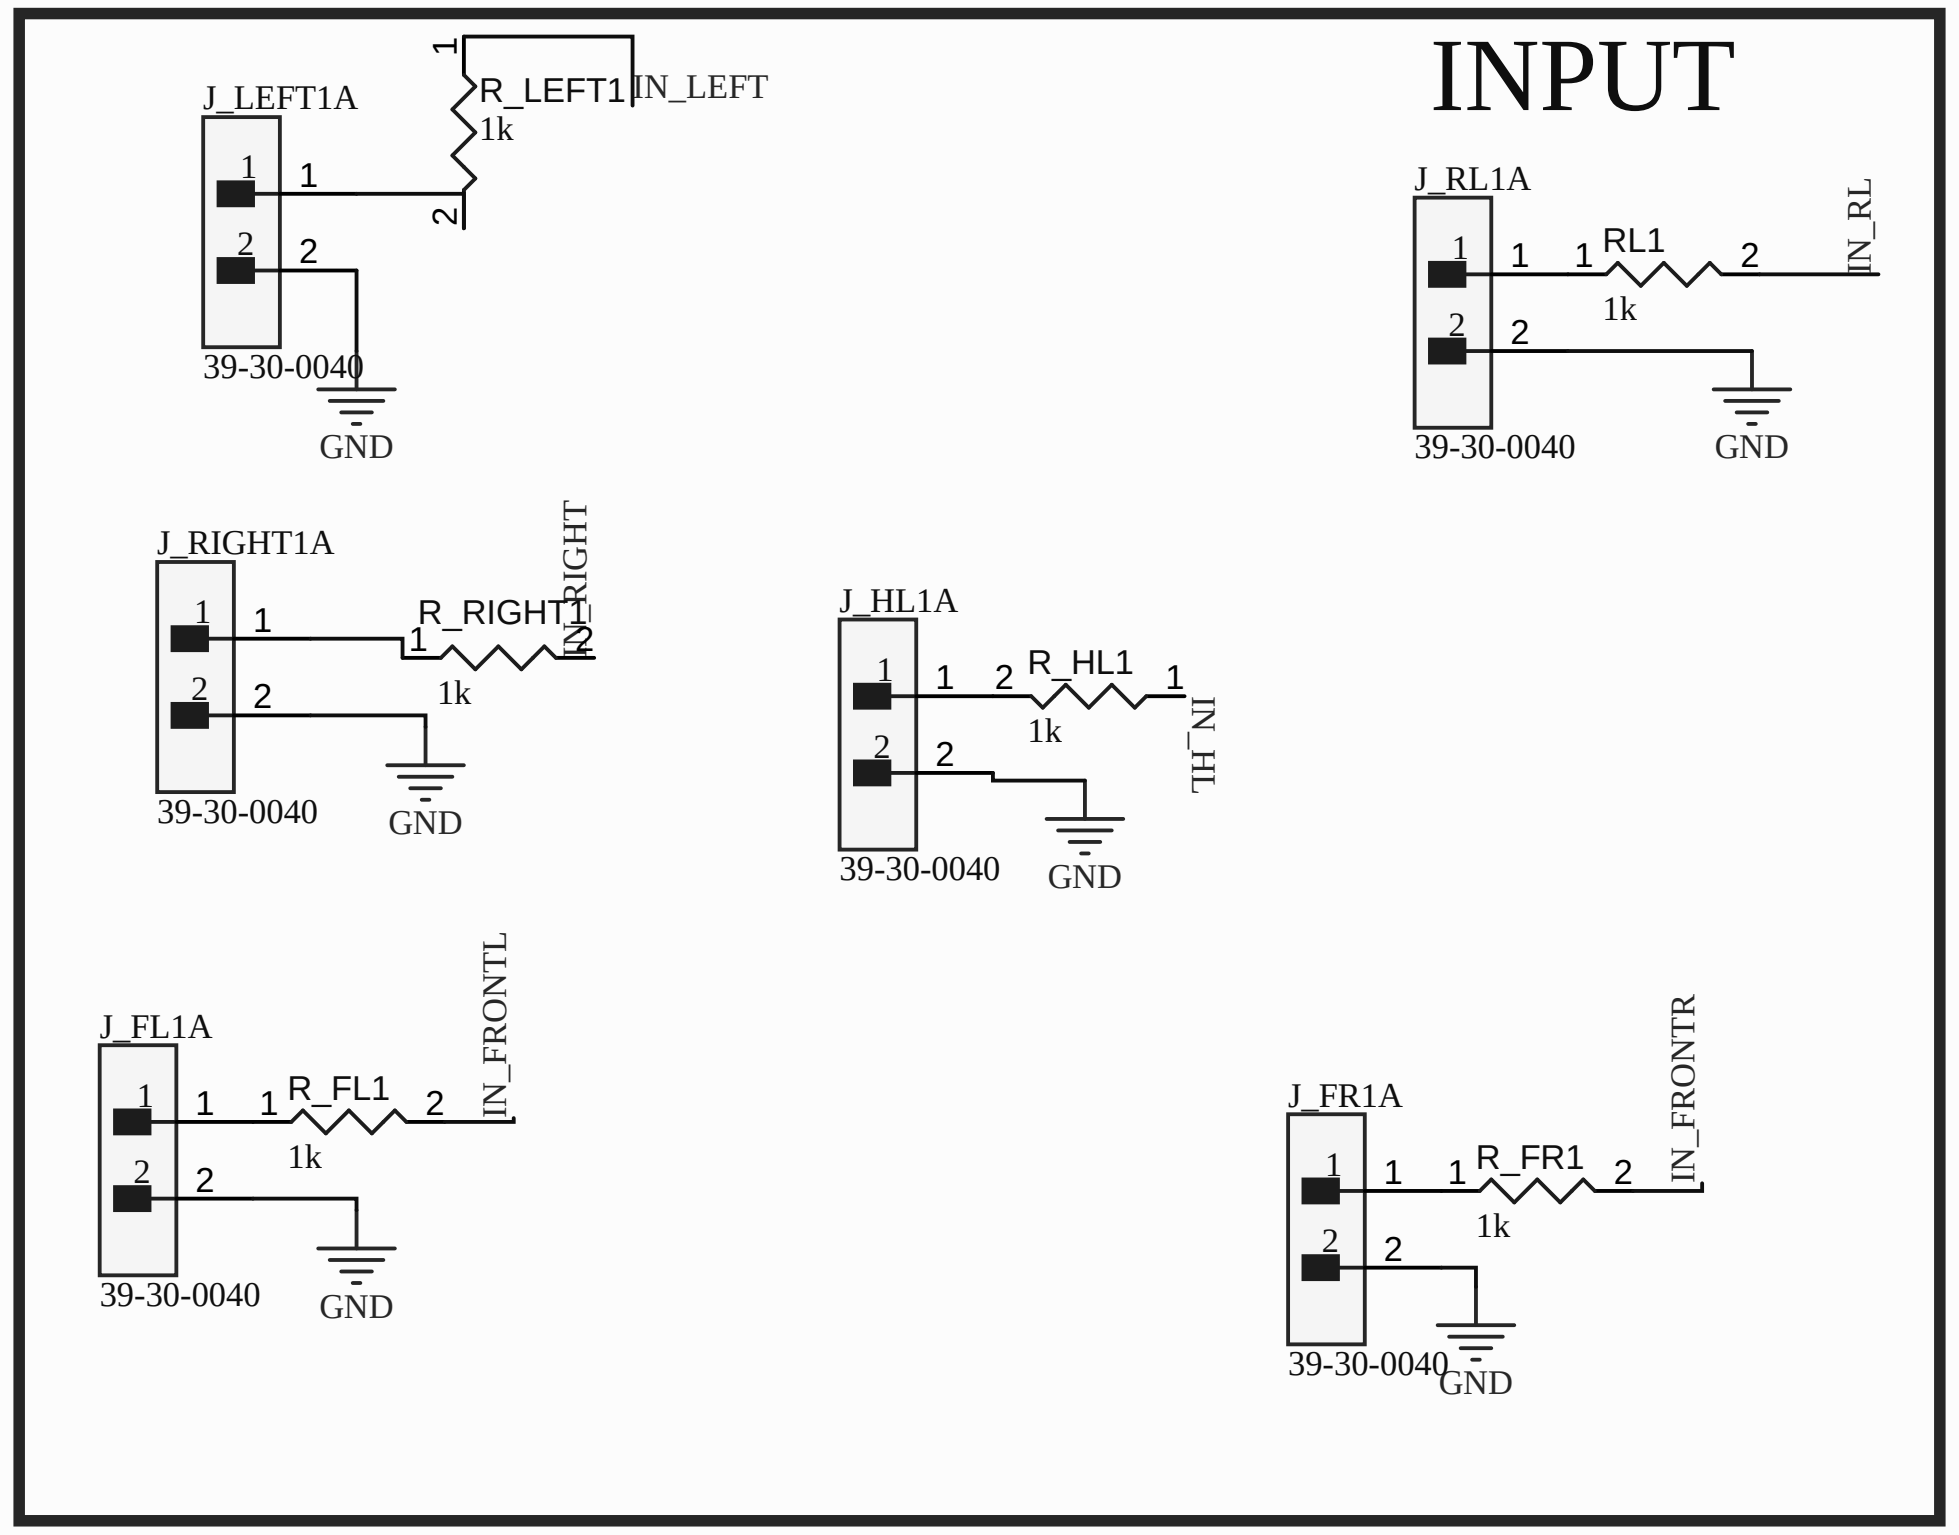

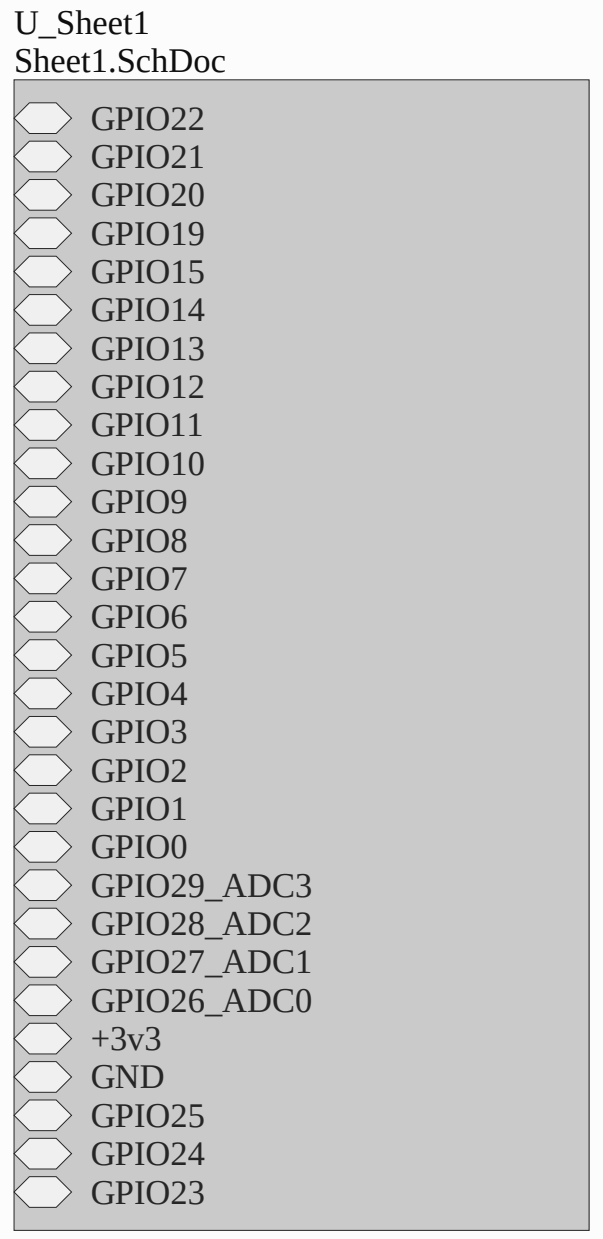

CAN_BLOCK

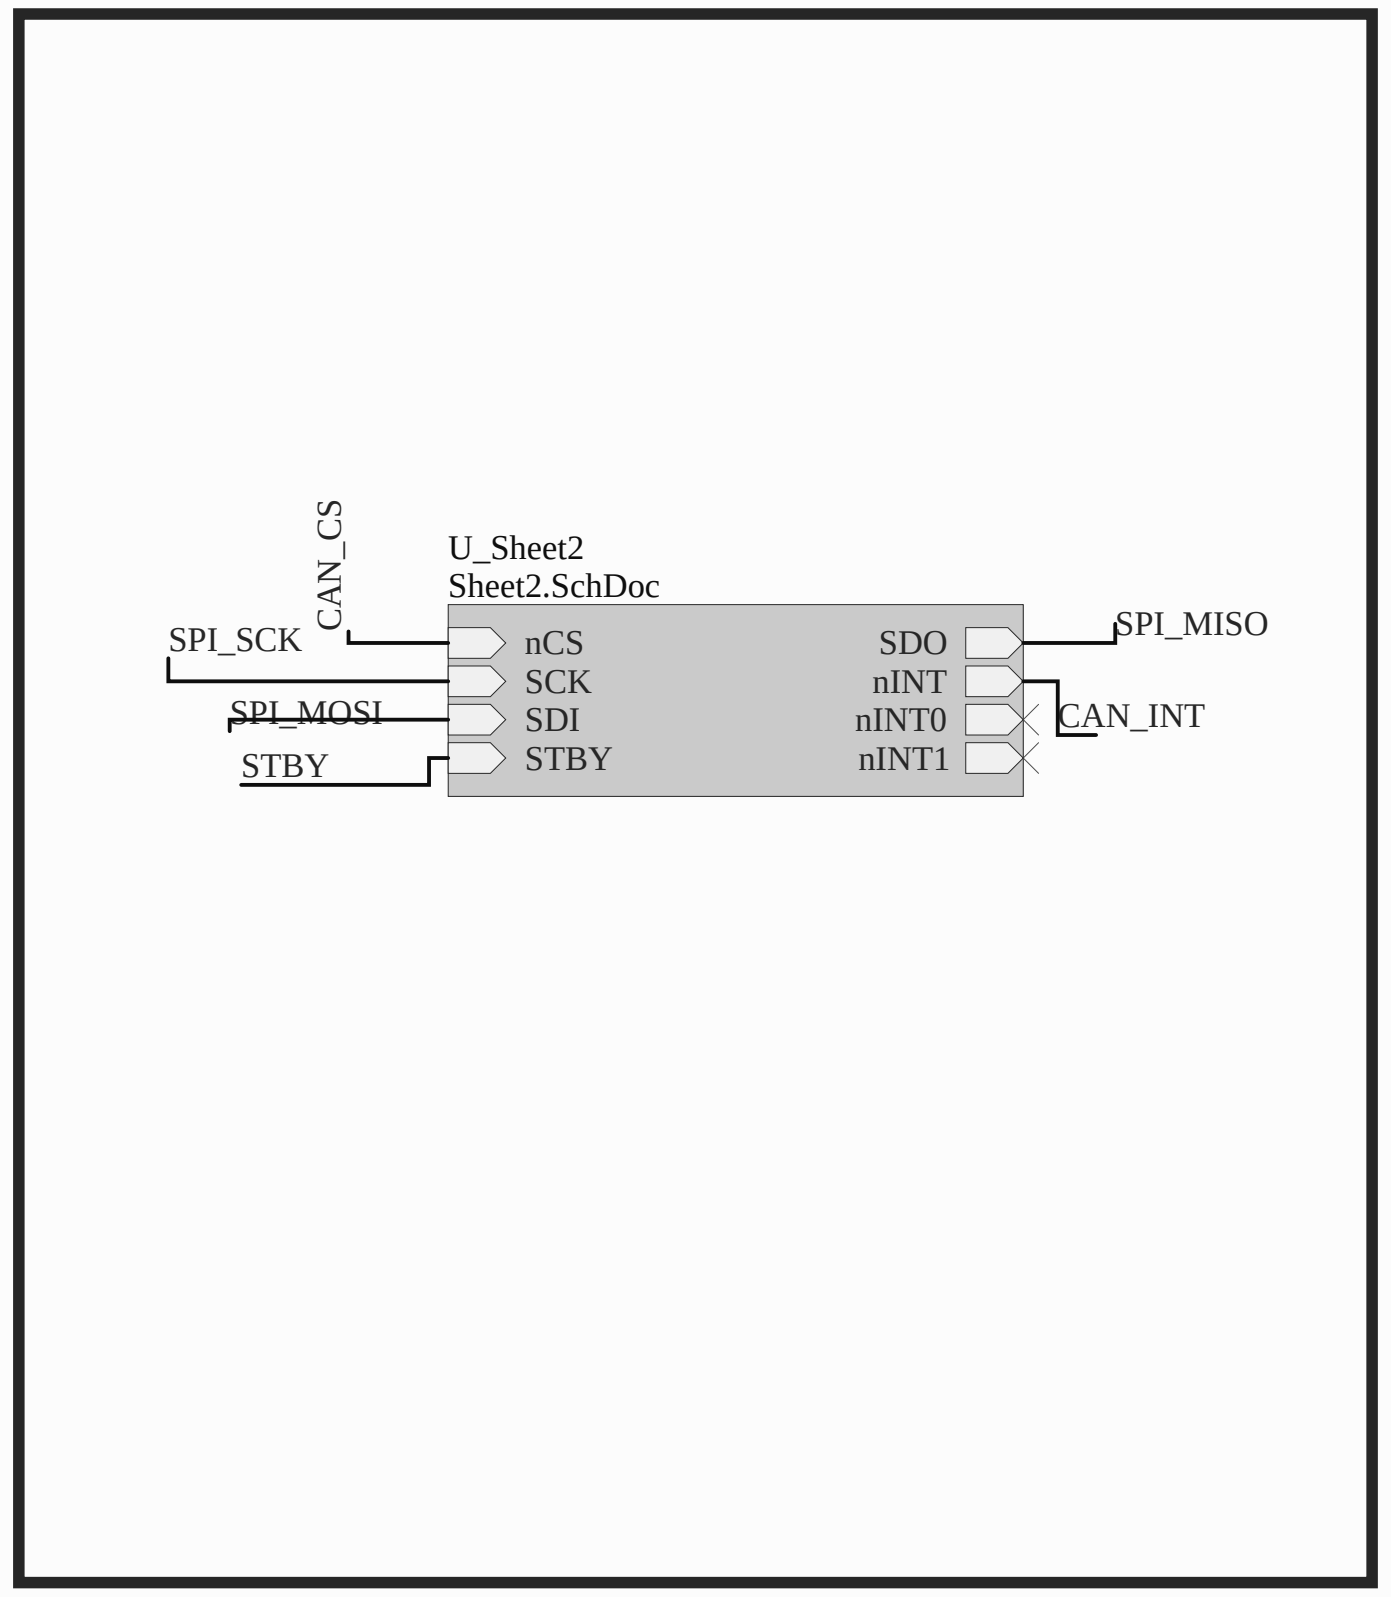

Intelligence

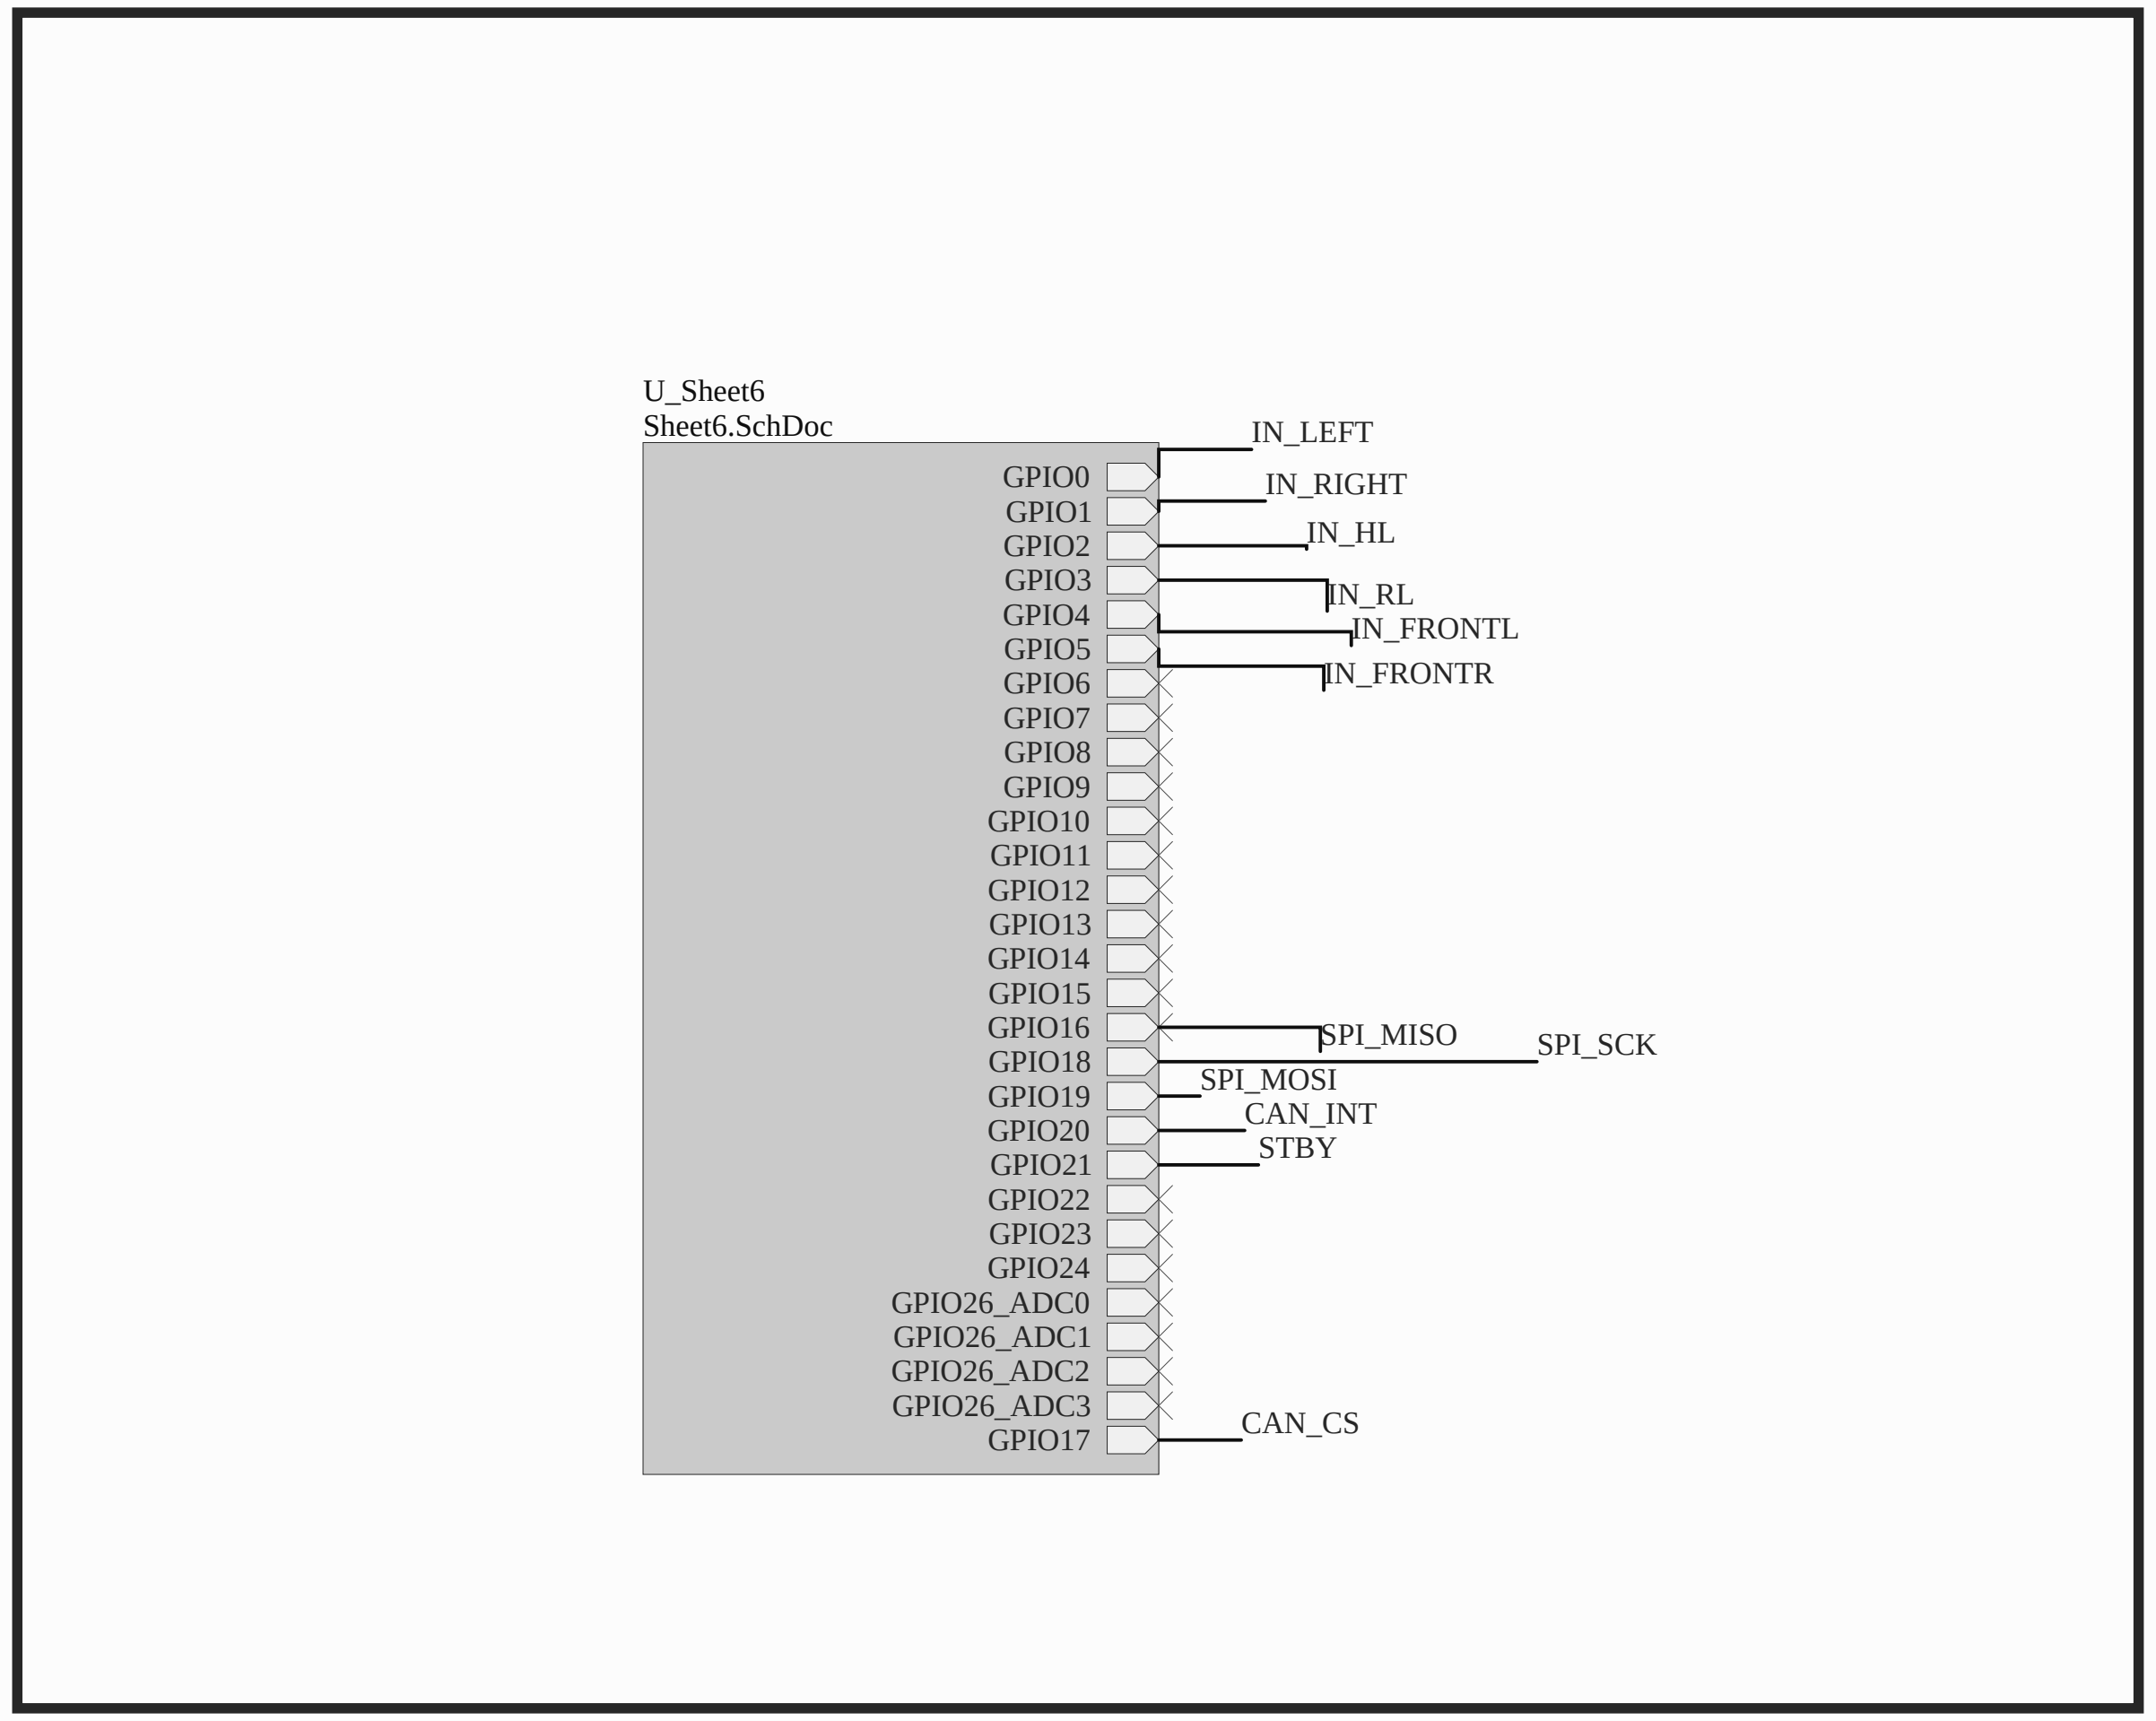

REVISION	DESCRIPTION	DATE	APPROVED

APPROVALS	DATE
ENG: *	--/--/--
DSN: *	--/--/--
CHK: *	--/--/--

REFERENCE DOCUMENTS

BOM: <BOM DOC NO>
ASSY DWG: <ASSY DWG NO>
FAB DWG: <FAB DWG NO>
PCB DWG: <PCB DWG NO>

PROJECT *

Altium

*
*
*
*

PROJECT REVISION: DOCUMENT REVISION: DESIGN ITEM: 4a59fa6964c5fdb3decc4fdf34bdb3cd4f5

TITLE *

SIZE B
CAGE CODE ?????
DWG NO. <SCH DWG NO>
REV
SCALE:
FILE NAME Top level.SchDoc
SHEET 1 OF 5

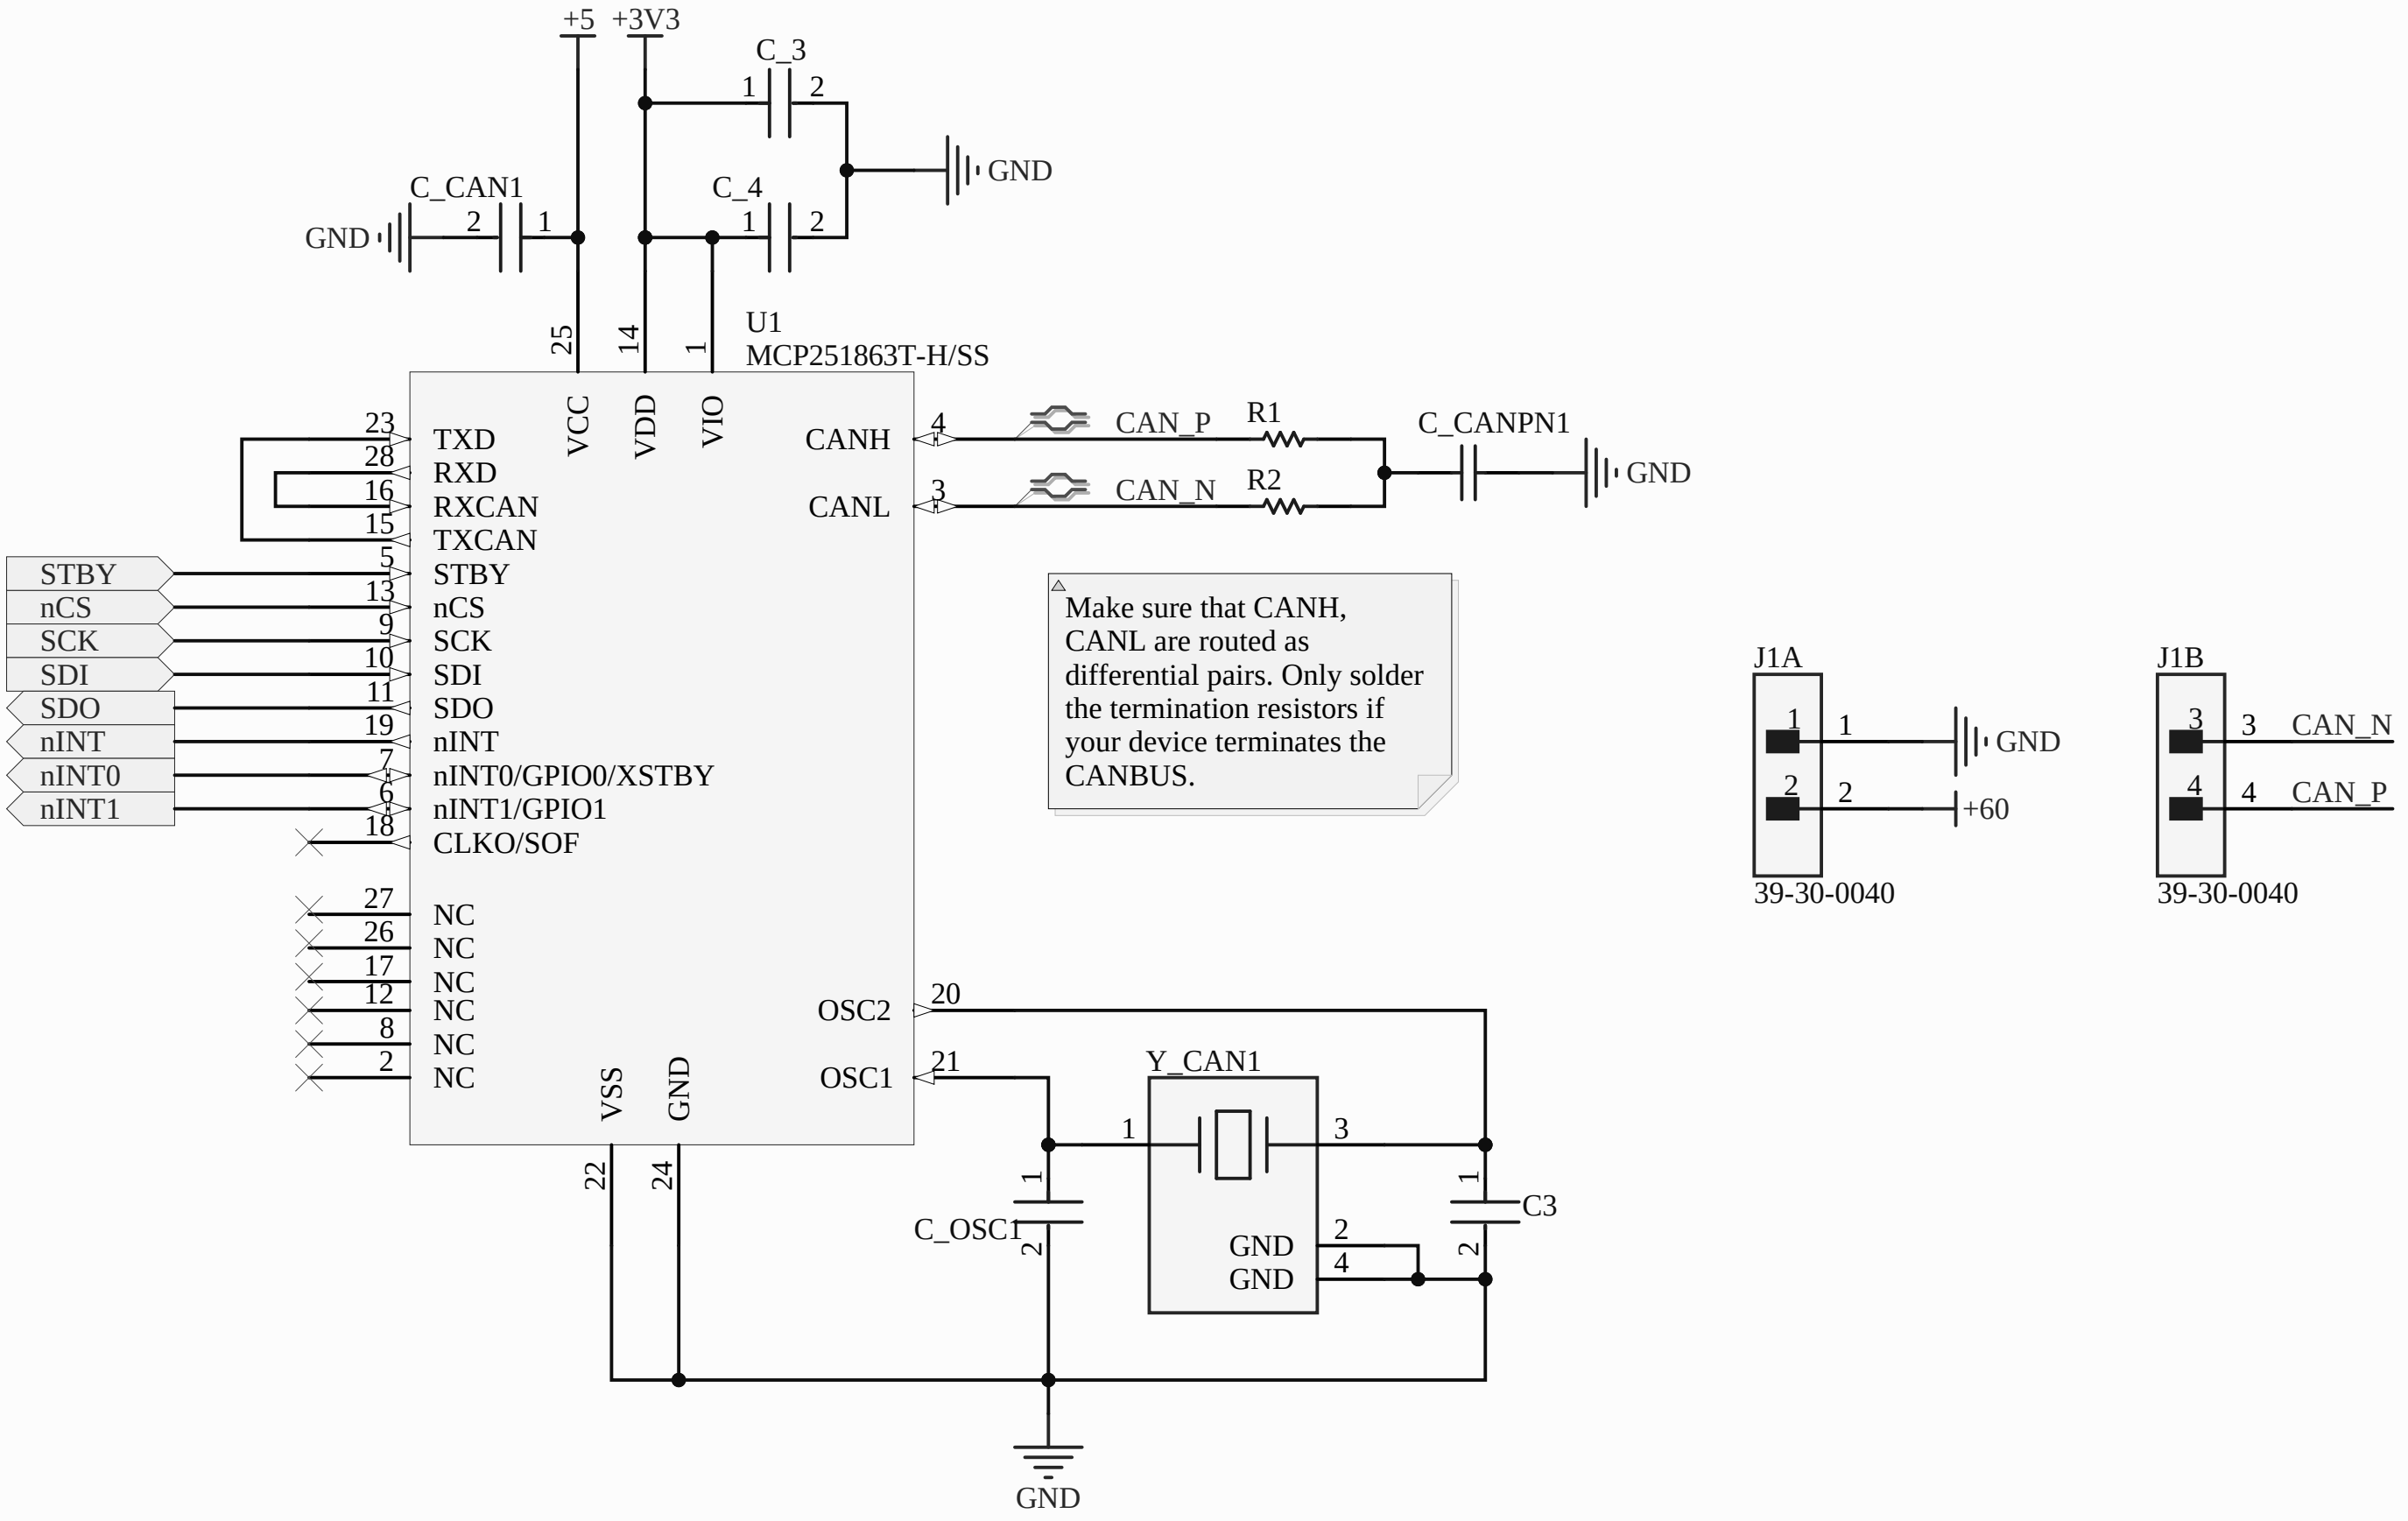

Make sure that CANH, CANL are routed as differential pairs. Only solder the termination resistors if your device terminates the CANBUS.

Title		
Size A	Number	Revision
Date: 10-24-2026		Sheet of
File: C:\Users\..\Sheet2.SchDoc		Drawn By:

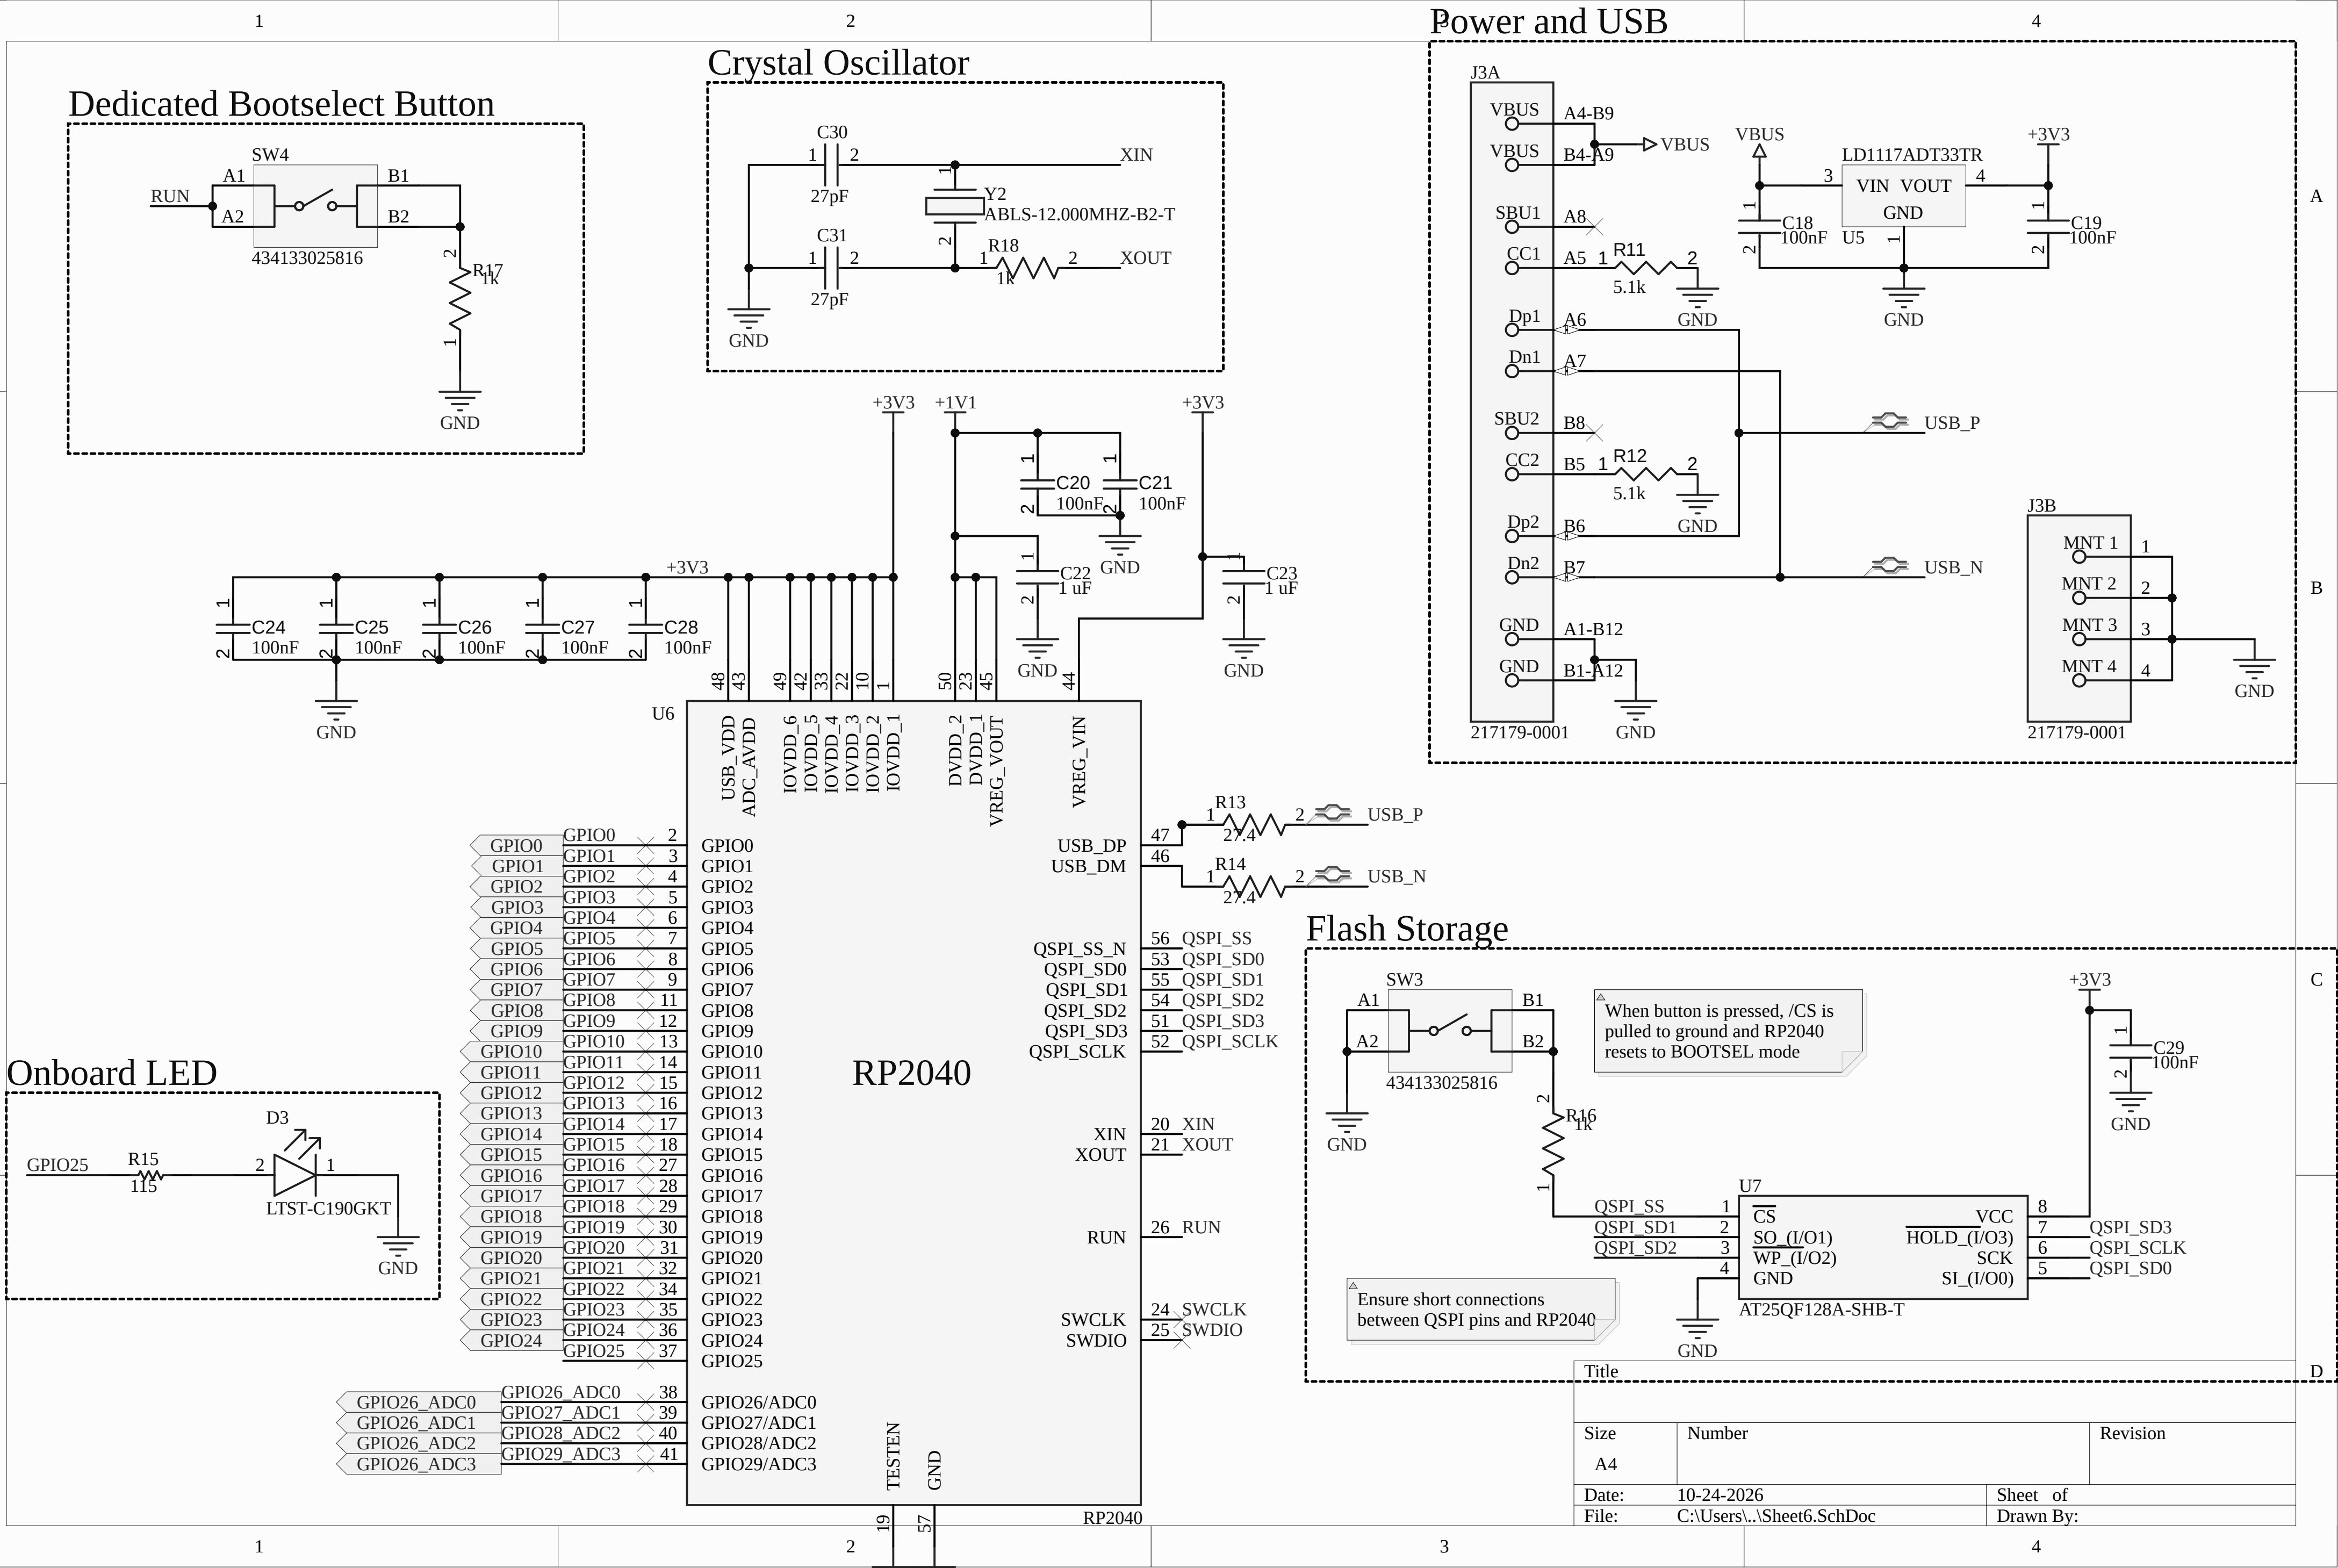

When button is pressed, /CS is pulled to ground and RP2040 resets to BOOTSEL mode

Ensure short connections between QSPI pins and RP2040

Title		
Size A4	Number	Revision
Date: 10-24-2026		Sheet of
File: C:\Users\..\Sheet6.SchDoc		Drawn By:

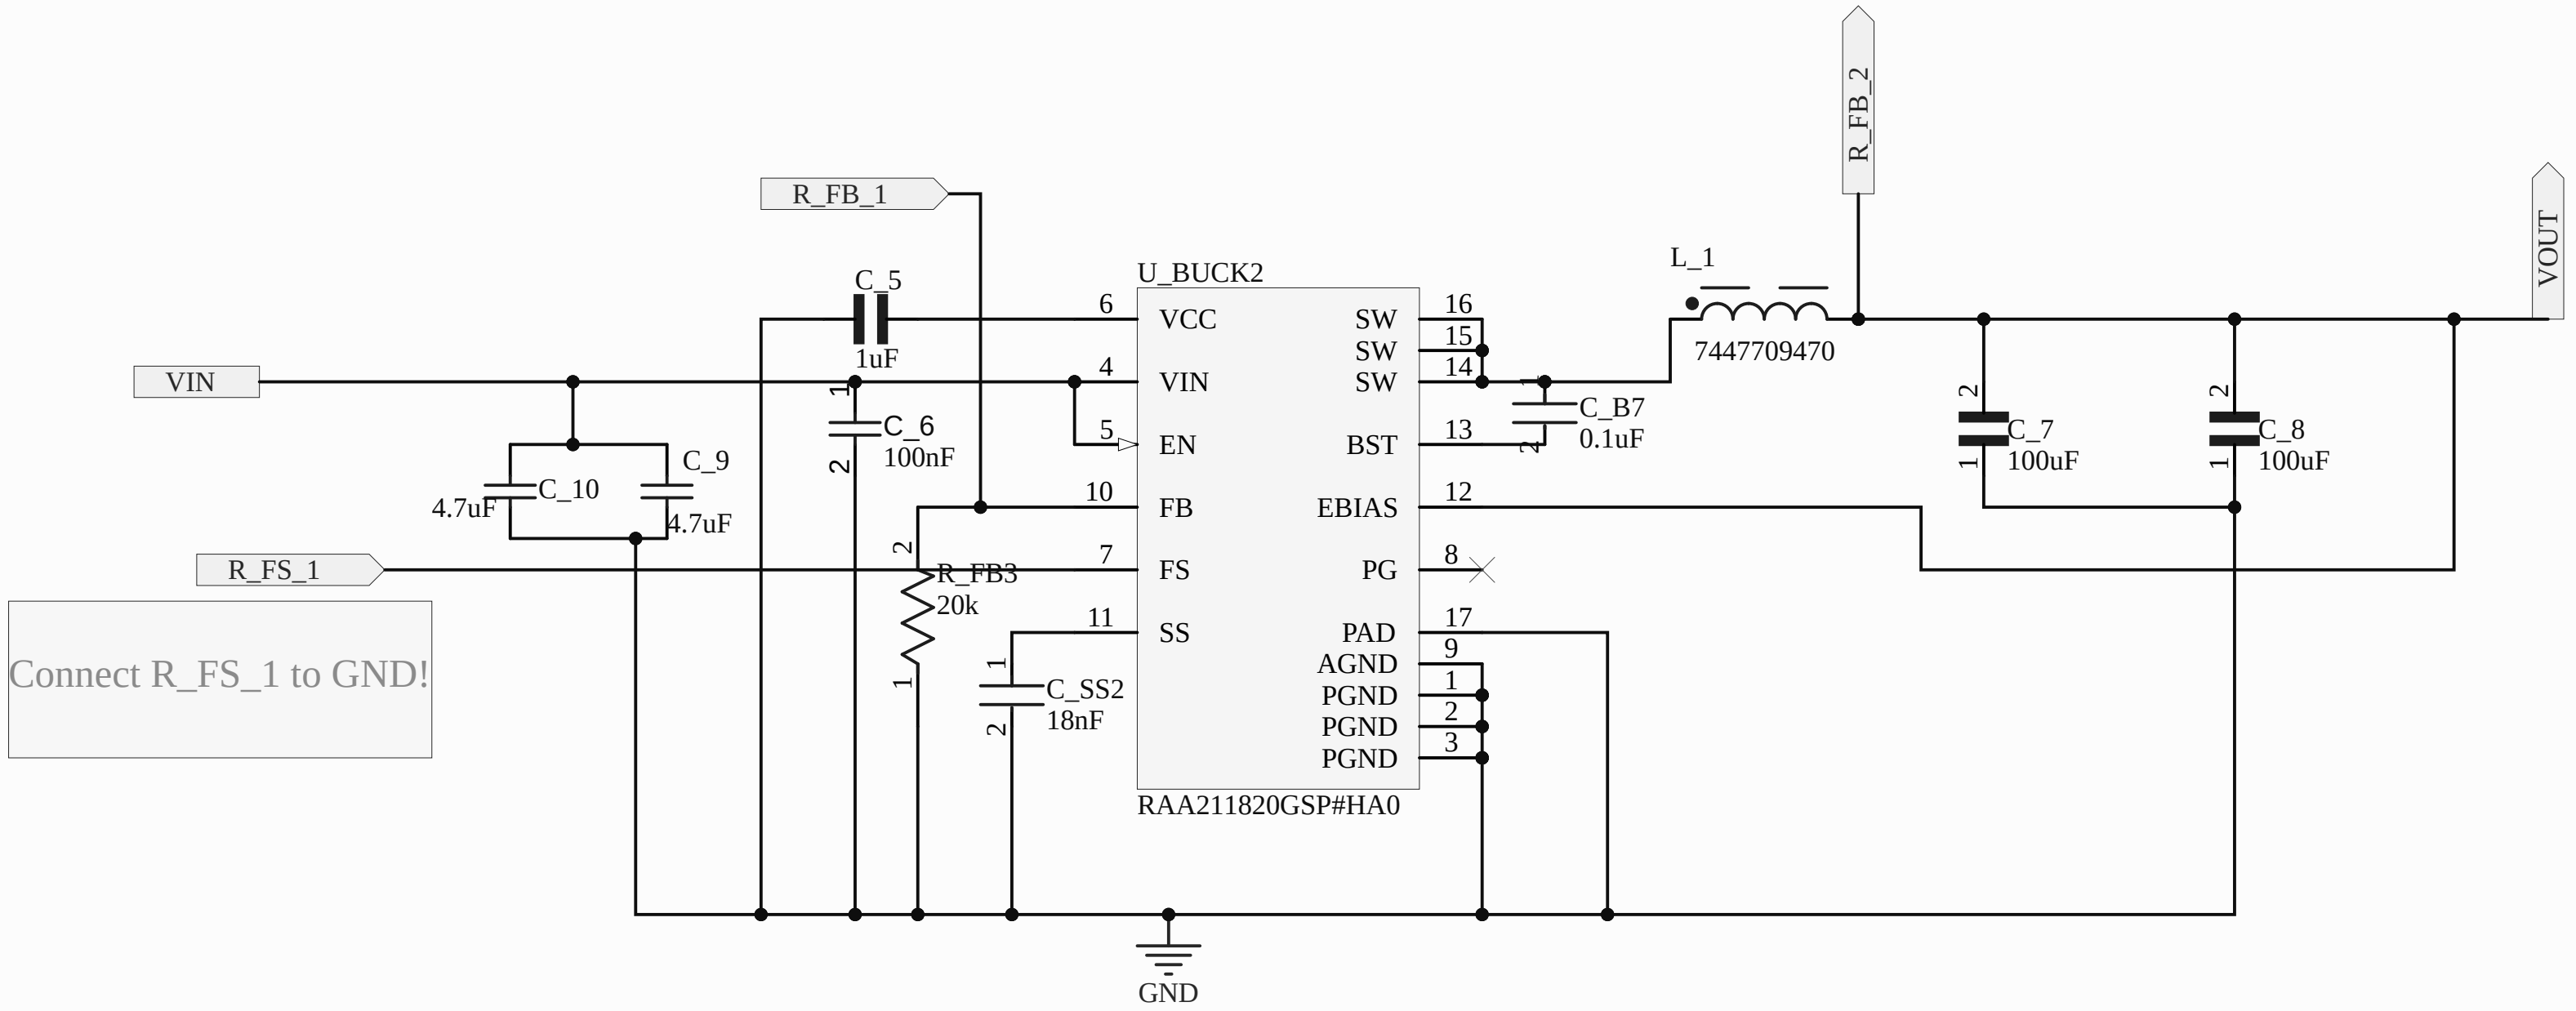

Connect R_FS_1 to GND!

Title

Size
A4

Number

Revision

Date: 10-24-2026

Sheet of

File: C:\Users\..\Sheet3.SchDoc

Drawn By: