



encoding

D3.2 Report on Pattern Identification of Critical Combustion Events

VERSION: 1.0

LEADER: Soledad Le Clainche (UPM)



**Funded by
the European Union**

This project has received funding from the European Union's Horizon Europe research and innovation programme under grant agreement No 101072779.

Action Number: 101072779

Action Acronym: ENCODING

Action title: ENabling sustainable COmbustion technologies using hybrid physics-based Data-driven modelING

Project Start Date: 01/01/2023

Duration: 48 months

Coordinator: *Université Libre de Bruxelles (ULB)*

Deliverable No:	D3.2
Deliverable Name:	Report on Pattern Identification of Critical Combustion Events
Deliverable Version:	1.0
WP No:	3
WP Leader:	Soledad Le Clainche (UPM)
Due date:	[AAAAA]
Delivery date:	[PLACEHOLDER]

Dissemination Level:

PU	Public Use	X
PP	Restricted to other programme participants (including the Commission Services)	
RE	Restricted to a group specified by the consortium (including the Commission Services)	
CO	Confidential, only for members of the consortium (including the Commission Services)	



Document Summary Information

Abstract:

DA FARE ALLA FINE

Keywords: Combustion, DNS, NH_3/H_2 , Dynamic Mode Decomposition, HODMD, HOSVD, Pattern identification, Reactive flows, Mixing layer, Coherent structures

Revision history:

History of Changes		
Version	Date	Author
v.0.1		

Quality Control:

	Who	Date
Checked by internal reviewer	Heinz Pitsch (RWTH)	DATE
Checked by WP Leader	Soledad Le Clainche (UPM)	DATE
Checked by Project Coordinator	Alessandro Parente	[PLACEHOLDER]



Acknowledgements

The ENCODING project has received funding from the European Union's Horizon Europe research and innovation programme under the Marie Skłodowska-Curie grant agreement No. 101072779.

Disclaimer

The results of this presentation reflect only the author(s) views and opinions and do not necessarily reflect those of the European Union. The European Union can not be held responsible for them.

Contents

1	Introduction	6
2	HODMD Analysis of the NH_3/H_2 Non-Premixed Reacting Mixing Layer	6
2.1	NH_3/H_2 non-premixed mixing layer	6
2.2	Methods	7
2.2.1	High Order Dynamic Mode Decomposition	7
2.2.2	Multidimensional Iterative HODMD (mdHODMDit)	8
2.3	Results and Discussion	10
2.3.1	Data Structure and Preprocessing	10
2.3.2	Parameter Calibration	11
2.3.3	Frequency–Amplitude Spectra and associated DMD modes	11
3	HOSVD+GPR Surrogate Model for the ULB Hydrogen-Fuelled Flameless Furnace	15
3.1	ULB hydrogen-fueled flameless furnace	15
3.2	Methods	16
3.2.1	HOSVD+GPR reduced order model for parametric interpolation	16
3.3	Results and Discussion	17



1 Introduction

Data for this report comes from different members of the consortium. The first dataset, is the one anticipated in the previous deliverable on data assimilation. It is generated by Giovanni Grassi (DC6) at CORIA and describes a Hydrogen-Ammonia blend. This data contains different boundary conditions, making it suitable for pattern identification within the same phenomena across different scenarios. Moreover the study of the behaviour of combustion of Hydrogen-Ammonia blends is extremely important in the scope of reducing NOx emission, one of the main objectives of the overall project. The second dataset is generated by Lorenzo Fracino (DC2) at RWTH Aachen and represents a Mehtane-Hydrogen mixing layer.

2 HODMD Analysis of the NH_3/H_2 Non-Premixed Reacting Mixing Layer

2.1 NH_3/H_2 non-premixed mixing layer

This dataset consists of direct numerical simulations (DNS) of a two-dimensional non-premixed ammonia-hydrogen-air reacting mixing layer. It is generated by DCGIOVANNI at CORIA using the structured mesh reactive flow solver SiTCom-B [8]. The configuration represents a splitter-plate stabilized flame in which a cold fuel stream and a hot air stream interact across a shear layer, representative of conditions encountered in practical burners.

The lower stream consists of a NH_3/H_2 fuel blend (with 15% H_2 by volume) at ambient temperature (300 K) with a mean velocity of 15 m s^{-1} , while the upper stream consists of preheated air with a mean velocity of 39.6 m s^{-1} . A cold wall maintained at 600 K is imposed at the top boundary, and a symmetry condition is applied at the bottom. Homogeneous velocity fluctuations of 10% are prescribed at both inlets. The computational domain measures $12 \times 1 \text{ cm}$ and is discretized on a uniform grid of 2400×200 cells with a resolution of $50 \text{ }\mu\text{m}$.



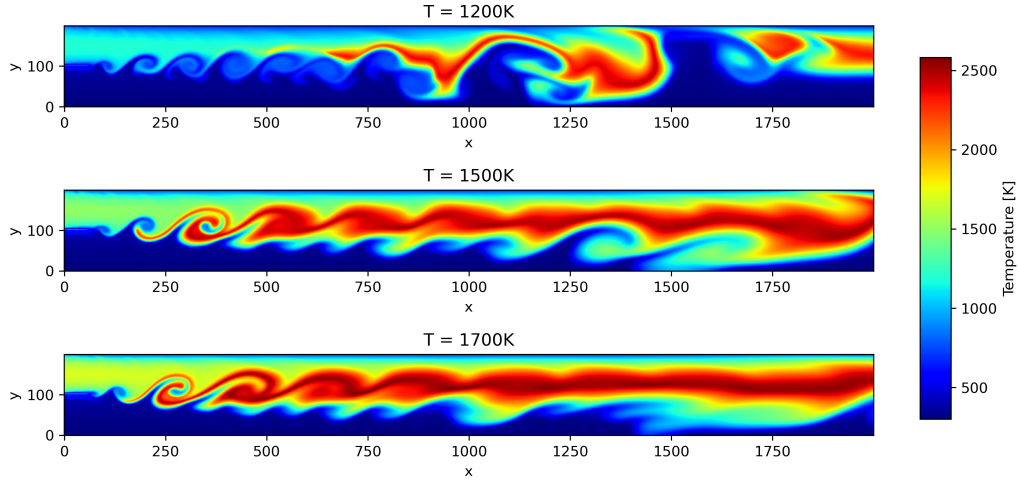


Figure 1: Three representative snapshots of the temperature field from the NH_3/H_2 non-premixed reacting mixing layer DNS, illustrating the spatial evolution of the flame and mixing structures at different instants.

Three datasets are generated at different air preheat temperatures, namely 1200 K, 1500 K, and 1700 K, to probe the sensitivity of the flame dynamics and species evolution to the inlet thermal boundary condition. The domain geometry, grid resolution, and flow velocities are identical across all three cases. Each snapshot contains 19 reactive scalar fields corresponding to the species of the reduced mechanisms RmAH-1 and RmAH-2 [5] — namely H_2 , O_2 , H_2O , H , O , OH , HO_2 , NH_3 , NH_2 , NH , N , NO , NO_2 , N_2O , HNO , NNH , N_2H_2 , N_2 , and Ar — together with temperature, yielding 20 variables in total. The species analysis presented in this work is conducted exclusively on the 1500 K dataset, which constitutes the reference operating condition for the assessment of the proposed methodologies.

2.2 Methods

2.2 High Order Dynamic Mode Decomposition

Dynamic Mode Decomposition (DMD) [9] is a data-driven spectral method that extracts spatially coherent structures and their associated temporal dynamics directly from time-resolved snapshot ¹ data. Given a sequence of snapshots $\mathbf{v}_k \in \mathbb{R}^J$, $k = 1, \dots, K$, DMD seeks a linear operator $\mathbf{A}$ such that $\mathbf{v}_{k+1} \approx \mathbf{A} \mathbf{v}_k$, whose leading eigenpairs encode the dominant frequencies and growth/decay rates of the system. The full data field is then expressed as a superposition of DMD spatial modes $u_p(\mathbf{x})$ with purely exponential temporal evolution,

$$v(\mathbf{x}, t) = \sum_{p=1}^P a_p u_p(\mathbf{x}) e^{(\delta_p + i\omega_p)(t-1)\Delta t}, \quad (1)$$

¹Matrix that has as columns (rows) the time index and all the other unfolded indices as rows (columns)

where $a_p \geq 0$ are real amplitudes, ω_p are angular frequencies, δ_p are growth rates, and Δt is the sampling interval. Each mode is normalised so that its root-mean-square norm equals unity.

Higher-Order Dynamic Mode Decomposition (HODMD) [6] extends DMD making it more suitable for noisy data and nonlinear phenomena such as the ones encountered dealing with combustion data. The main idea is to extend the assumption that the system's evolution can be described with a linear operator to temporal windows of size d . Each snapshot is thus related to the d subsequent snapshots through a set of linear operators. This generalised assumption leads to a sliding-window construction of an augmented snapshot matrix and allows for better identification of close frequency even in noisy data. When $d = 1$, HODMD reduces exactly to standard DMD.

The HODMD algorithm proceeds in two main steps:

Step 1 — Dimensionality reduction via SVD. A truncated Singular Value Decomposition (SVD) is applied to the original snapshot matrix, compressing the spatial dimension from J to N retained singular values. The tolerance ε_{SVD} controls the level of compression by enforcing

$$\frac{\sigma_j}{\sigma_1} \geq \varepsilon_{\text{SVD}}, \quad (2)$$

where σ_j are the singular values in decreasing order. The resulting temporal coefficients weighted by the retained singular values form the reduced snapshot matrix, which filters noise.

Step 2 — High-order Koopman eigenvalue problem. HODMD is applied to the reduced snapshot matrix with delay parameter d . The eigenvalue problem is solved to extract DMD modes, frequencies and amplitudes. A second tolerance ε_{DMD} selects physically significant modes by retaining only those whose relative amplitude satisfies

$$\frac{a_p}{\max_p(a_p)} > \varepsilon_{\text{DMD}}. \quad (3)$$

Physical interpretation From a practical point of view DMD looks for coherent structures that behave in an oscillatory manner across the whole dataset. This makes it easier to observe phenomena that cannot be observed when looking at the original data, that often is very complex. A big issue is that the assumption that the system can be described with a matrix even in snapshot form is very strong and it will fail in case of noisy or turbulent data. HODMD is able to obtain better results because instead of looking for oscillatory coherent structures across the whole dataset, it looks for structures that depend on the last d snapshots instead of just the last one. This makes it possible to extract up to $d \times N$ modes instead of N :

$$\underbrace{\mathbf{v}_{k+1} = \mathbf{A} \mathbf{v}_k}_{\text{DMD}} \longrightarrow \underbrace{\mathbf{v}_{k+d} = \mathbf{A}_1 \mathbf{v}_{k+d-1} + \mathbf{A}_2 \mathbf{v}_{k+d-2} + \cdots + \mathbf{A}_d \mathbf{v}_k}_{\text{HODMD}}$$

2.2 Multidimensional Iterative HODMD (mdHODMDit)

High Order Singular Value Decomposition Both DMD and HODMD perform truncated SVD for denoising and dimensionality reduction. This effectively filters out structures that have very low temporal contribution across the whole dataset, which often



coincides with noise. Combustion data often carry several physical variables and span a multi-dimensional spatial domain. The application of SVD on the reshaped tensor introduces an implicit coupling among modes that belong to different dimensions, and the SVD truncation cannot distinguish noise contributions arising from the spatial, temporal, or variable axes independently. For this reason, a first improvement over the classical version of HODMD is to introduce High Order Singular Value Decomposition (HOSVD) [3] in the first step. This is a generalization of SVD that allows filtering along each dimension of the tensor.

It works on data keeping it in tensor form $\mathcal{T} \in \mathbb{R}^{N_{\text{var}} \times N_x \times N_y \times N_t}$. First, it unfolds $\mathcal{T}$ along each of its four modes in turn, computes the n -mode singular values $\{\sigma_j^{(n)}\}$ from the corresponding unfolded matrix, and retains factor matrices $\mathbf{U}^{(n)}$ by enforcing the truncation criterion

$$\frac{\sigma_j^{(n)}}{\sigma_1^{(n)}} \geq \varepsilon_{\text{tol}}, \quad (4)$$

independently for each mode n . The result is a compressed core tensor $\mathcal{S}$ and a set of factor matrices $\{\mathbf{U}^{(n)}\}_{n=1}^4$ such that $\mathcal{T} \approx \mathcal{S} \times_1 \mathbf{U}^{(1)} \times_2 \mathbf{U}^{(2)} \times_3 \mathbf{U}^{(3)} \times_4 \mathbf{U}^{(4)}$, where $\times_n$ denotes the n -mode product. These matrices are exactly the ones one would obtain performing truncated SVD on each of the unfoldings. Therefore, the temporal factor matrix $\mathbf{U}^{(4)}$ is the same as before.

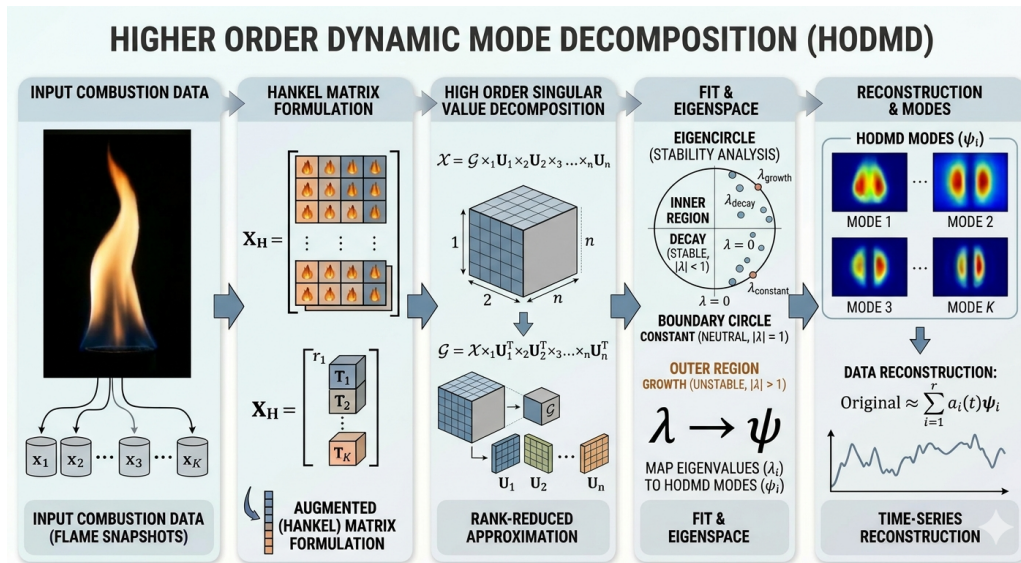


Figure 2: Scheme representing High Order Dynamic Mode Decomposition on combustion data

After the DMD eigendecomposition, the reduced spatial DMD modes are projected back to the original tensor dimensions by contracting with the spatial factor matrices $\mathbf{U}^{(1)}, \mathbf{U}^{(2)}, \mathbf{U}^{(3)}$ and the core tensor, recovering physically interpretable spatial structures in the full variable- x - y space without ever vectorising the multi-variable field, from this the algorithm is called multidimensional.

Then, the procedure is iterated. The DMD reconstruction is used to form an updated snapshot tensor, which is re-compressed via HOSVD. The spatial ranks r_x , r_y , and

r_{var} retained after truncation are monitored: if they differ from those of the previous iteration, the HODMD step is repeated on the new compressed temporal matrix $\hat{V}_1^K$. Convergence is declared when the spatial ranks no longer change between two successive iterations. This can be interpreted as the low-rank spatial structure implied by the DMD modes is the same as the one identified by HOSVD.

Identification of Physical Frequencies Once the analysis is calibrated and run for a sufficient number of parameters, one can find physical frequencies and modes. In order to find these modes, one must look at the frequency amplitude spectra, focusing on the peaks, i.e. frequencies. Physical modes should exist regardless of how the observer matrix is built and Therefore be consistent across a wide range of d parameter. Moreover relevant structures should be associated to relevant eigenvectors and not ones close to noise threshold, thus being resilient to various tolerance thresholds ε_{tol} .

2.3 Results and Discussion

The main results reported in this section are build upon the work of Pablo López Salazar that first started the collaboration with CORIA. mdHODMDit described in section 2.2.2 is applied to extract core physical behaviour of the system in the three cases reported in section 2.1.

2.3 Data Structure and Preprocessing

For each case, data is organized in a four dimensional tensor: $\mathcal{T} \in \mathbb{R}^{N_{\text{var}} \times N_x \times N_y \times N_t}$, in which the dimension correspond to variables, the streamwise spatial coordinate x , the cross-stream coordinate y , and time t , respectively. In order to study the region of physical interest, i.e. the one in which the instability develops and evolves the domain of the streamwise direction is restricted to the range $[0.3, 5.0]$ cm downstream of the splitter plate. This is the near-field flame stabilization region and the initial development of the shear layer. Data was also processed in time discarding the initial transient regime. For this kind of data, scaling is important due to the differences in the order of magnitude of the variables considered and the differences between their units of measurement [2, 7]. Since there is no universally accepted quantitative criterion to determine which scaling method is most appropriate, the analysis was performed using both auto scaling $x_i^{\text{scaled}} = \frac{x_i - \mu_x}{\sigma_x}$ and range scaling $x_i^{\text{scaled}} = \frac{x_i - x_{\min}}{x_{\max} - x_{\min}}$. The analysis yielded similar results for both scaling methods, identifying the same main frequencies. For convenience, frequencies are expressed in units of Strouhal number:

$$St = f \cdot \frac{\ell}{U_b}, \quad (5)$$

where $\ell = 3$ mm is the reference lenght of the mixing layer and U_b is the bulk speed, respectively $U_b = 21,34, 24,29$ e $27,14$ m s⁻¹ for cases at 1200 K, 1500 K e 1700 K.



2.3 Parameter Calibration

The analysis is performed over a grid of Hankel delay parameters

$$d \in \{10, 15, 20, 25, 30, 35, 40, 45\} \quad (6)$$

and tolerance values

$$\varepsilon_{\text{tol}} \in \{5 \times 10^{-3}, 2 \times 10^{-2}, 3 \times 10^{-2}, 4 \times 10^{-2}, 5 \times 10^{-2}, 7 \times 10^{-2}, 1 \times 10^{-1}, 2 \times 10^{-1}\}. \quad (7)$$

The same tolerance ε_{tol} governs both the HOSVD truncation (equation (4)) and the amplitude threshold applied to retain DMD modes.

2.3 Frequency–Amplitude Spectra and associated DMD modes

The frequency–amplitude plots shown in Figures 3, ??, and 8 display, for each temperature case, the normalised DMD mode amplitudes $|\hat{a}_k| / \max_k |\hat{a}_k|$ as a function of Strouhal number St . Each marker corresponds to one $(d, \varepsilon_{\text{tol}})$ pair; different colours encode different values of d and different marker styles encode different tolerances. Peaks that persist across all curves can therefore be read off directly as physically robust frequencies. To showcase the coherent structures associated to these frequencies, temperature is chosen as the representative variable due to the fact that in many cases is a variable of interest for both experimental and theoretical problems. Despite this, coherent structures for every variable can be plotted.

Case 1200 K The spectrum for the 1200 K case, shown in Figure 3, is characterised by a rich distribution of modes spanning a broad Strouhal range up to $St \approx 1.7$. The dominant peak is located at $St \approx 0.42$ and is reproduced consistently across all $(d, \varepsilon_{\text{tol}})$ combinations, confirming its physical robustness. Secondary peaks of significant amplitude are identified at $St \approx 0.84$, $St \approx 1.26$, $St \approx 1.68$. These peaks are approximately integer multiples of the dominant frequency and therefore interpretable as higher harmonics of the fundamental shear-layer instability.

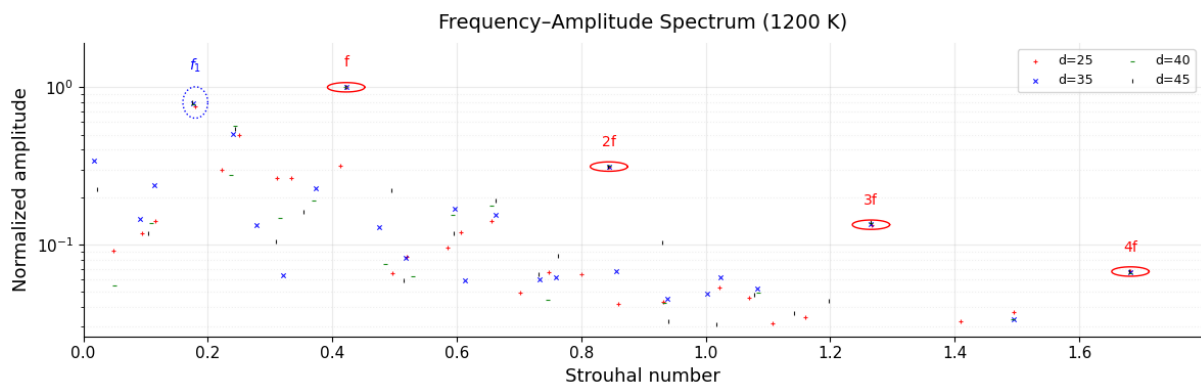


Figure 3: Normalised DMD mode amplitudes as a function of Strouhal number for the 1200 K dataset, for $d \in \{35, 40, 45\}$ and $\varepsilon_{\text{tol}} \in \{5 \times 10^{-2}, 7 \times 10^{-2}\}$.

The associated modes to the highlighted points in Figure 3 are shown in Figure 4.

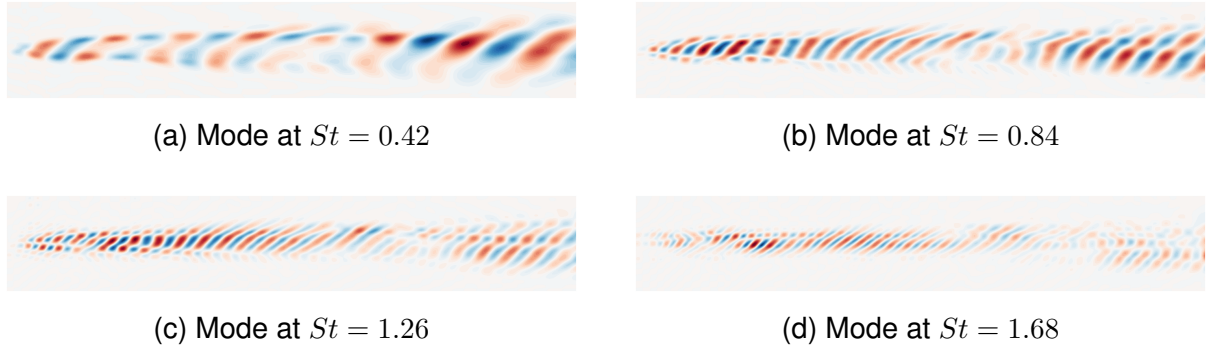


Figure 4: DMD temperature modes for the 1200 K dataset at the main harmonic frequencies ($St = 0.42, 0.84, 1.26, 1.68$), corresponding to $f, 2f, 3f$, and $4f$ respectively.

Case 1500 K The 1500 K spectrum, shown in Figure 5, exhibits a structure closely analogous to the 1200 K case, with the dominant peak again located at $St \approx 0.42$. Secondary peaks are found at $St \approx 0.81$, $St \approx 1.22$, and $St \approx 1.47$. In this case however, the spectrum shows other spectral peaks as highlighted in Figure 5 in green. These peaks represent the interaction between main frequencies typical of the quasi periodic regime.

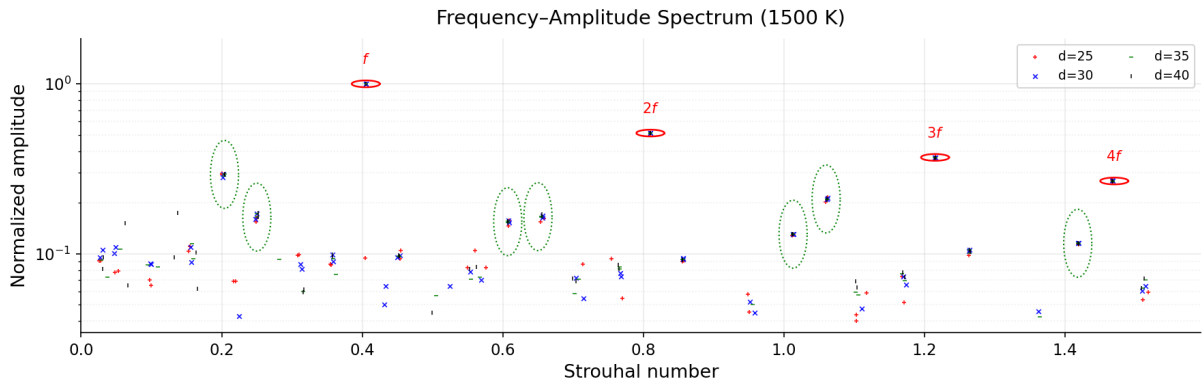


Figure 5: Normalised DMD mode amplitudes as a function of Strouhal number for the 1500 K dataset, for $d \in \{35, 40, 45\}$ and $\varepsilon_{\text{tol}} \in \{5 \times 10^{-2}, 7 \times 10^{-2}\}$. Red solid ellipses mark the main harmonic series ($f, 2f, 3f$); green dashed ellipses mark the quasi-periodic combination tones.

The associated modes to the main harmonic frequencies circled in red in Figure 5 are shown in Figure 6.

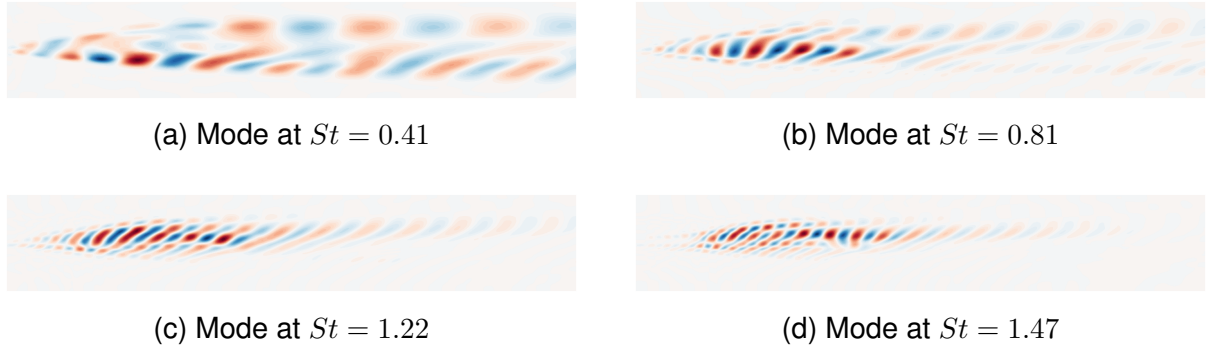


Figure 6: DMD temperature modes for the 1500 K dataset at the main harmonic frequencies ($St = 0.41, 0.81, 1.22, 1.47$), corresponding to $f, 2f, 3f$, and $4f$ respectively.

Figure 7 shows the modes associated to the quasi-periodic combination frequencies highlighted in green in Figure 5.

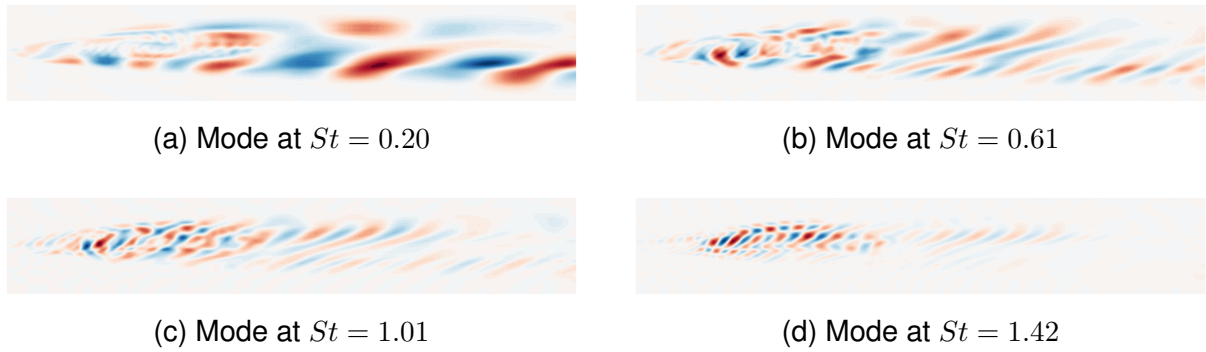


Figure 7: DMD temperature modes for the 1500 K dataset at the quasi-periodic combination frequencies ($St = 0.20, 0.61, 1.01, 1.42$), highlighted by green ellipses in Figure 5.

Case 1700 K The 1700 K case, shown in Figure 8, presents a different spectral structure. The dominant peak remains at $St \approx 0.40$, consistent with the lower-temperature cases, but the overall spectrum is sparser: maximum relevant Strouhal number observed is $St \approx 1.25$ and fewer secondary modes are retained. In addition to the main harmonic series, two low-frequency peaks at $St \approx 0.11$ and $St \approx 0.19$, highlighted in blue in Figure 8, are identified across multiple parameter combinations.

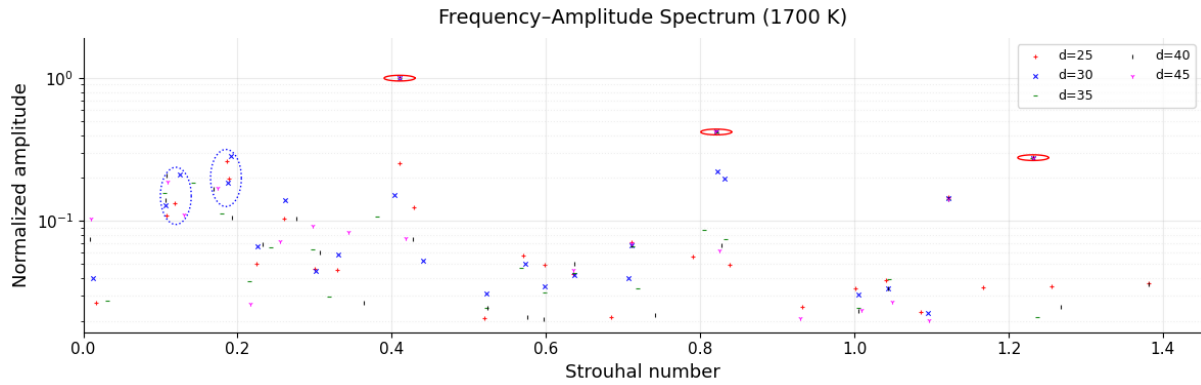


Figure 8: Normalised DMD mode amplitudes as a function of Strouhal number for the 1700 K dataset, for $d \in \{35, 40, 45\}$ and $\varepsilon_{\text{tol}} \in \{5 \times 10^{-2}, 7 \times 10^{-2}\}$.

The associated modes to the highlighted points in Figure 8 are shown in Figure 9.

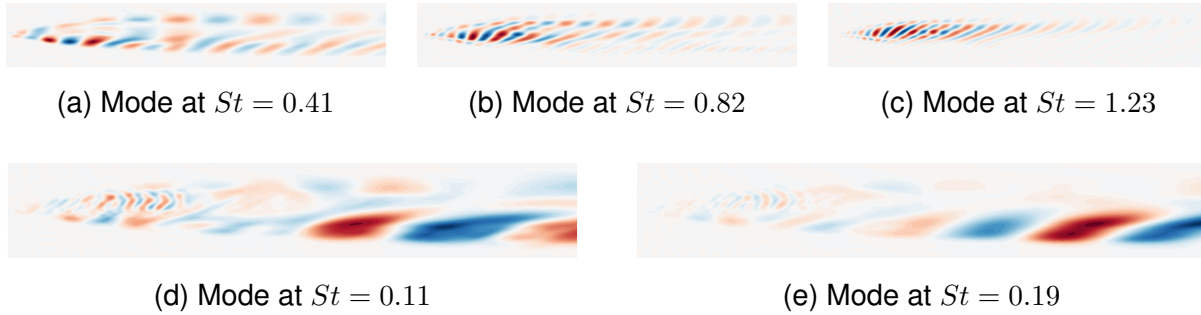


Figure 9: DMD temperature modes for the 1700 K dataset. Top row: modes at the three main harmonic frequencies ($St = 0.41, 0.82, 1.23$). Bottom row: modes at the additional frequencies highlighted in blue in Figure 8 ($St = 0.11, 0.19$).

Discussion: Spectral and Spatial Evolution Across Preheat Temperatures

The main focus of this analysis was that of understanding how flow changes in the three cases, rather than investigating the difference in chemical behaviour. Despite this, in practical cases these regimes yield different efficiency-pollutants tradoff, with the lowest temperature case being the least efficient and least polluting one and the higher temperature case to have the highest NO_x emission levels and most mixing.

The first case analyzed, i.e. 1200 K has an harmonic flow with with a dominant peak at $St \approx 0.42$ is accompanied by secondary peaks at approximately integer multiples of this frequency extending up to $St \approx 1.7$. This is the sign of a strongly periodic shear layer instability, and the modes reported in Figure 4 show that the phenomenon develops in the far field. This reflects downstream convection and roll-up of large-scale vortices that have had space and time to develop along the mixing layer.

On the other hand, at 1700 K, the spectral picture changes substantially. While the

dominant frequency is preserved at $St \approx 0.40$, confirming that the primary instability mechanism remains kinematically controlled by the shear between the two inlet streams, the harmonic content is severely reduced, and the overall spectrum is sparser. By observing the modes reported in Figure 9, one can see that the main instability develops in the near field. This can be explained by the fact that the stronger heat release ties the energetically significant dynamics to the attachment point.

The 1500 K case contains the transition between the two cases. This is particularly relevant from a physical point of view due to the fact that is a balance between the two regimes. In turn this means that understanding the flow structure might help in designing more efficient combustion processes that suppress NO_x formation. In this spectrum we can find dominant harmonic structures as in the 1200 K, but additionally the creation of quasi-periodic frequencies highlighted in green in Figure 5. This quasi-periodic spectral content can be interpreted as a signature of the competing dynamics active at this operating point: the primary shear-layer instability is still present, but thermal effects are beginning to modify the nonlinear interactions. The transient case, i.e. 1500 K has energetically significant DMD modes in both the far field and the near field regions as shown in Figures 6 and 7. In this regime the instabilities are affected by both the far field convective instability and the energy release near the inlet.

To sum up, the analysis shows that increasing preheat temperature shifts the flow dynamics to the near field and supports a transition from a harmonic (periodic) regime to a less harmonic, more complex/quasi-periodic regime. Further investigation along this research direction, extending the modal analysis to additional operating conditions and coupling it with chemical kinetics data is required to provide better characterization of pollutant formation for the flow.

3 HOSVD+GPR Surrogate Model for the ULB Hydrogen-Fuelled Flameless Furnace

3.1 ULB hydrogen-fueled flameless furnace

This dataset comes from 2D CFD RANS of the ULB-modified stagnation-point reverse-flow combustor (SPRF) operating under flameless combustion conditions [4]. The domain is reduced to consider only the internal chamber of the burner. This choice was made to leave open the option of easily interpolating the data if necessary. The total number of available simulations is 175, but only 20 of them lie on a regular grid of operating conditions and are therefore suitable for an analysis with tensorial methods. This dataset is used to develop and validate the HOSVD+GPR reduced order model described in Section 3.2.1. The aforementioned grid is defined by three parameters: equivalence ratio ϕ , hydrogen blending fraction in the fuel H_2 , and operating pressure p :

$$\phi \in \{1.1, 1.2, 1.3, 1.4, 1.6\}, \quad H_2 \in \{0.0, 0.3\} \text{ vol}\%, \quad p \in \{1, 2\} \text{ atm.}$$

These parameters are the ones that an operator can set before starting the combustion.



The data is arranged in a 5 dimensional tensor:

$$\mathcal{T} \in \mathbb{R}^{N_\phi \times N_{H_2} \times N_p \times N_{\text{feat}} \times N_{\text{cells}}},$$

The analysis is performed solely on thermochemical variables, so temperature T and the 9 species $\{N_2, NH_2, NO_2, H_2O, OH, O_2, H_2, NH_3, NO, T\}$ indexed by N_{feat} . The 4 operating points with $\phi = 1.3$ are held out as the test set; the remaining 16 form the training set. Figure 10 shows an example of one data point for a given operating condition ($\phi = 1.2$, $H_2 = 0.3$ vol%, $p = 2$ atm):

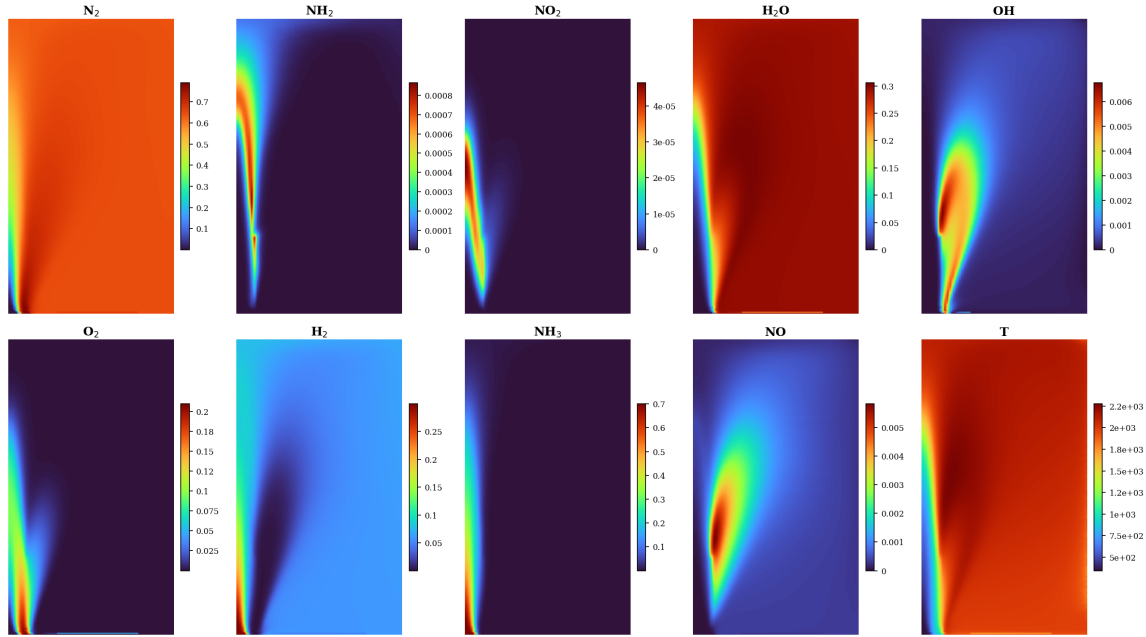


Figure 10: Thermochemical variables of the ($\phi = 1.2$, $H_2 = 0.3$ vol%, $p = 2$ atm) operating conditions point in the ULB-modified SPRF furnace.

3.2 Methods

3.2 HOSVD+GPR reduced order model for parametric interpolation

The method is developed in the scope of surrogate modeling. In particular, a crucial step towards the realization of fully working digital twins is the ability of leveraging high fidelity simulations to generate data for new operating conditions. In other words, the goal is that of being able to predict the behaviour of the system in unseen points of the operating condition space, so in practice the task is that of super resolution. Proper Orthogonal Decomposition (POD) combined with Gaussian Process Regression (GPR) has been successfully employed in the past for this task [1]. The approach proposed here extends it to tensorial data by replacing the matrix SVD with High Order Singular Value Decomposition (HOSVD) [3].

Decomposition Given the 5-way data tensor $\mathcal{T} \in \mathbb{R}^{N_\phi \times N_{H_2} \times N_p \times N_{\text{feat}} \times N_{\text{cells}}}$ introduced in Section 3.1, HOSVD yields a multilinear decomposition

$$\mathcal{T} = \mathcal{G} \times_1 \mathbf{U}_\phi \times_2 \mathbf{U}_{H_2} \times_3 \mathbf{U}_p \times_4 \mathbf{U}_{\text{feat}} \times_5 \mathbf{U}_{\text{cells}},$$

where $\mathcal{G}$ is a core tensor and each factor matrix $\mathbf{U}^{(n)}$ captures the variability along its respective dimension, obtained by truncated SVD of the n -mode unfolding of $\mathcal{T}$.

Interpolation via GPR A 1D Gaussian Process Regressor [10] is trained on the rows of $\mathbf{U}_\phi$, learning the mapping $\phi \mapsto \mathbf{U}_\phi$. The factor matrices $\mathbf{U}_{H_2}$, $\mathbf{U}_p$, $\mathbf{U}_{\text{feat}}$, and $\mathbf{U}_{\text{cells}}$ are held fixed at their training values, encoding the physical behaviour of the system along those axes without reparametrisation.

Reconstruction For an unseen equivalence ratio ϕ^* , the GPR predicts $\hat{\mathbf{U}}_\phi$ and the full thermochemical field is reconstructed as

$$\hat{\mathcal{T}} = \mathcal{G} \times_1 \hat{\mathbf{U}}_\phi \times_2 \mathbf{U}_{H_2} \times_3 \mathbf{U}_p \times_4 \mathbf{U}_{\text{feat}} \times_5 \mathbf{U}_{\text{cells}}.$$

The full pipeline is summarised schematically in Figure 11.

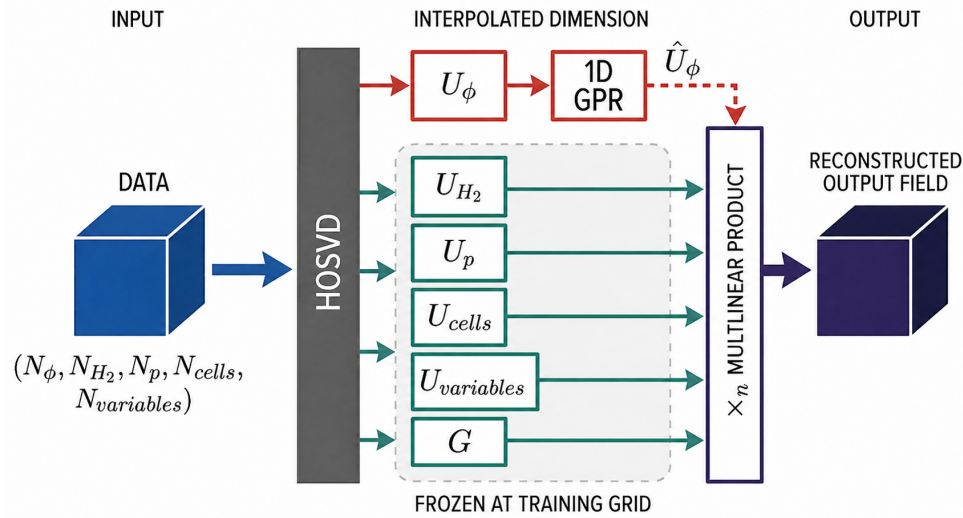


Figure 11: Schematic of the HOSVD+GPR pipeline.

3.3 Results and Discussion

Performance is evaluated on the 4 held-out operating points ($\phi = 1.3$, all H_2 and p combinations) using the normalised root mean square error (NRMSE) with range normalisation, which makes the metric comparable across variables with very different magnitudes. The POD+GPR baseline is computed following [1]. Figure 13 shows the temperature field reconstruction for one of the held-out conditions. The HOSVD+GPR prediction captures the spatial structure of the flame more accurately, with the largest discrepancies concentrated near the reaction zone where gradients are steepest.

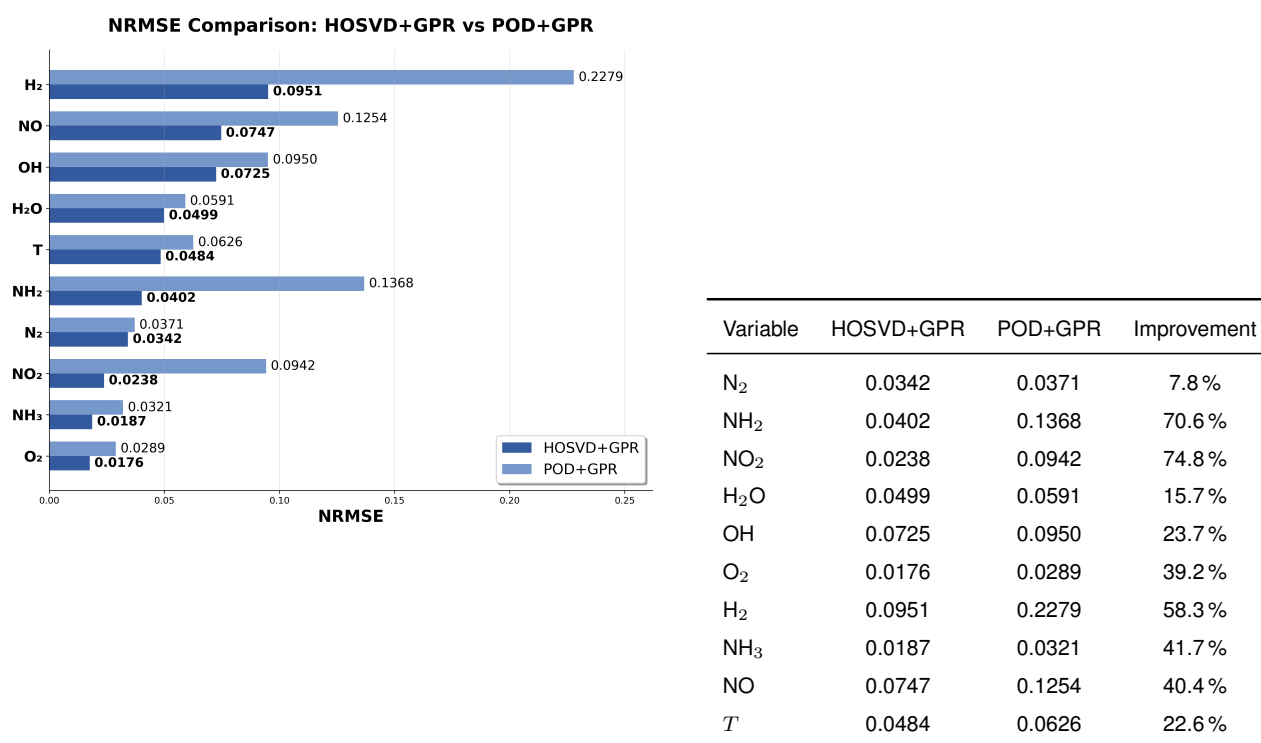


Figure 12: NRMSE comparison between HOSVD+GPR and POD+GPR across all predicted variables. The bar chart (left) and table (right) both show that HOSVD+GPR consistently outperforms POD+GPR, with the largest improvements observed for NH₂ (70.6 %), NO₂ (74.8 %), and H₂ (58.3 %).

Figure 13: Temperature field reconstruction for a held-out condition ($\phi = 1.3$). Left: CFD reference. Centre: HOSVD+GPR (NRMSE = 0.0484). Right: POD+GPR (NRMSE = 0.0626). [Add figure when available.]

Discussion

References

- [1] Gianmarco Aversano, Marco Ferrarotti, and Alessandro Parente. Digital twin of a combustion furnace operating in flameless conditions: reduced-order model development from cfd simulations. *Proceedings of the Combustion Institute*, 38(4):5373–5381, 2021.
- [2] Adrián Corrochano, Giuseppe D'Alessio, Alessandro Parente, and Soledad Le Clainche. Higher order dynamic mode decomposition to model reacting flows. *International Journal of Mechanical Sciences*, 249:108219, 2023.
- [3] Lieven De Lathauwer, Bart De Moor, and Joos Vandewalle. A multilinear singular value decomposition. *SIAM journal on Matrix Analysis and Applications*, 21(4):1253–1278, 2000.
- [4] Lorenzo Giuntini, Chiara Novelli, M Mustafa Kamal, Marianna Cafiero, Chiara Galletti, Axel Coussement, and Alessandro Parente. Continuously-staged nh₃ oxidation in a stagnation-point reverse-flow combustor for low nox emissions. *Proceedings of the Combustion Institute*, 40(1-4):105674, 2024.
- [5] Giovanni Grassi, Luc Vervisch, and Pascale Domingo. Reduced chemistry for numerical combustion of nh₃/h₂ fuel blend. *Combustion and Flame*, 279:114287, 2025.
- [6] Soledad Le Clainche and José M Vega. Higher order dynamic mode decomposition. *SIAM Journal on Applied Dynamical Systems*, 16(2):882–925, 2017.
- [7] Alessandro Parente and James C Sutherland. Principal component analysis of turbulent combustion data: Data pre-processing and manifold sensitivity. *Combustion and flame*, 160(2):340–350, 2013.
- [8] Xavier Petit, Guillaume Ribert, G Lartigue, and P Domingo. Large-eddy simulation of supercritical fluid injection. *The Journal of Supercritical Fluids*, 84:61–73, 2013.
- [9] Peter J Schmid. Dynamic mode decomposition of numerical and experimental data. *Journal of fluid mechanics*, 656:5–28, 2010.
- [10] Christopher Williams and Carl Rasmussen. Gaussian processes for regression. *Advances in neural information processing systems*, 8, 1995.

