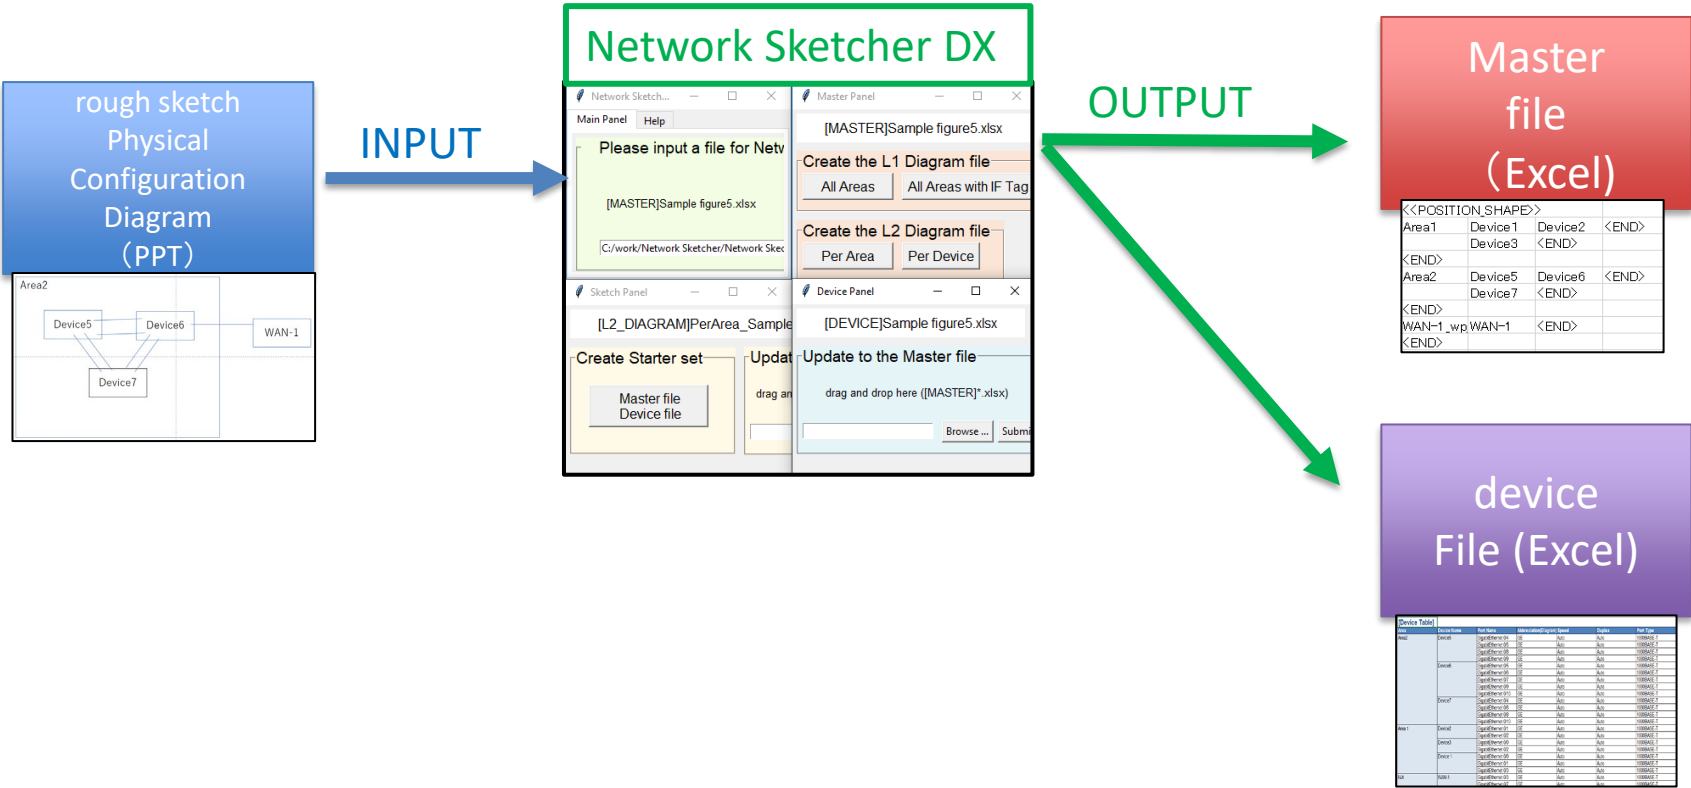# What you can do with this procedure
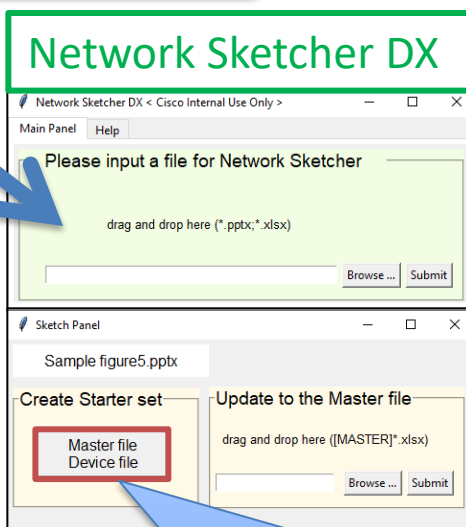
Load the rough sketch into Network Sketcher to generate a starter set (master and device files).

Starter Set Generation Procedure

A master file with [MASTER] and a device file with [DEVICE] are generated from the rough sketch.

(1) Drag and drop the rough sketch file to the Main Panel.

Network Sketcher DX

OUTPUT

(2) The Sketch Panel is displayed. Click the [Master file / Device file] button.

First, let's generate an L1L2L3 configuration diagram

When the starter set is generated, the Master Panel appears. It is already possible to generate a configuration diagram with default settings, so let's try it first.

Layer 1 configuration diagram

Layer 2 configuration diagram

Layer 3 configuration diagram